QBOX - 1-10V Multicurrent

24÷60 Watt | CC | SELV | PF λ ≥ 0,96 | IP 20 | CE | EMC | M | M | F | t_a -10°÷ +45°C | 85 mm

AC 50Hz | DC | On request

Dimmable 1..10

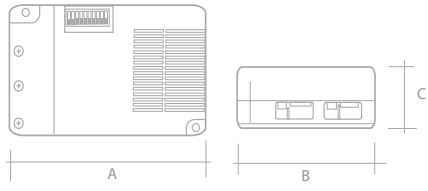

Part Number	Iout	Vout Led Min	Vout Led Max	Vout Led max @110V	Uout	W @230V	W @110V	Dimensions A x B x C	Protocol
A40QBOX1100B	600-2100mA	15	40	40	48	60W	45W	147 x 75 x 39	PUSH

Po Max at 100-120VAC	Po Max at 200-250VAC	Io	1	2	3	4
24W	24W	600mA	○	○	○	○
28W	28W	700mA	●	○	○	○
32W	32W	800mA	○	●	○	○
36W	36W	900mA	●	●	○	○
40W	40W	1000mA	○	○	●	○
40W	44W	1100mA	●	○	●	○
40W	48W	1200mA	○	●	●	○
40W	52W	1300mA	●	●	●	○
40W	56W	1400mA	○	○	○	●
40W	60W	1500mA	●	○	○	●
40W	60W	1600mA	○	●	○	●
40W	60W	1700mA	●	●	○	●
40W	60W	1800mA	○	○	●	●
40W	60W	1900mA	●	○	●	●
40W	60W	2000mA	○	●	●	●
40W	60W	2100mA	●	●	●	●



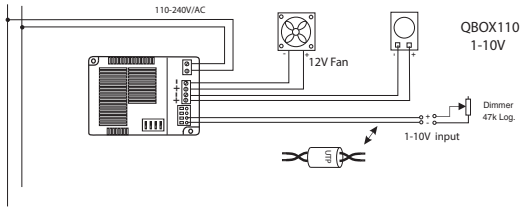

Datasheet download

Alimentatore LED multicorrente 1-10V

- Alimentatore indipendente - IP20 - Classe II di isolamento
- Uscita in corrente costante 600÷2100mA, ±5% programmabile con DIP-switches (vedi schema)
- QBOX110: Ingresso1-10V. A richiesta, versione 0-10V
- Uscita 12V 100mA per ventola
- Alimentazione: 110V ÷ 240V/AC - Uscita stabilizzata. A richiesta alimentazione a 230VDC.

Multicurrent LED Driver 1-10V

- Driver for independent mounting - IP20 - Insulation class II
- Output in steady current: 600÷2100mA, ± 5% settable by DIP-Switches (see scheme)
- QBOX110: 1-10V input. Control by 0-10V, on request
- Output 12v 100mA for cooling fan
- Input voltage: 110V ÷ 240V/AC - Steady output. On request, 230VDC input voltage

Copyright www.qlt.it • qlt@qlt.it