


Dafne adj



Tear-resistant system

Ø 63mm

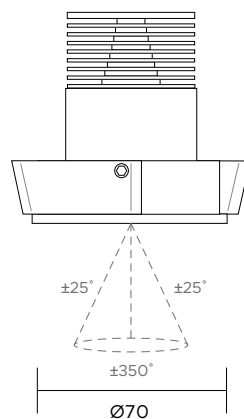

POWER SUPPLY	max 9W - max 500mA									
CODE	DFJ09 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>									
LED COLOUR	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K									
OPTICS	<table border="0"> <tr> <td>M</td> <td>W</td> <td>X</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>24°</td> <td>36°</td> <td>60°</td> </tr> </table>	M	W	X				24°	36°	60°
M	W	X								
24°	36°	60°								
FINISHES	W - White G - Grey B - Black K - Corten									
LUMEN OUTPUT SOURCE	1200lm (3000°K, 500mA)									
DELIVERED LUMEN OUTPUT	1080lm (3000°K, 500mA, 36°)									
LED NUMBER	1 power LED multichip									
MATERIAL	body in anodized aluminium, flange in painted aluminium									
DRIVER	not included, see pag. 323 and 326									
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable									
WIRING	in series									
MOUNTING	recessed (ceiling)									
NOTES	other RAL on request									