


Part Number	Control	Input Min	Input Max	Output	Dimensions A x B x C
A40SPI03000B	DIM/CCT/RGB/RGBW/SPI	12V	24V	4 groups SPI	160 x 46 x 25

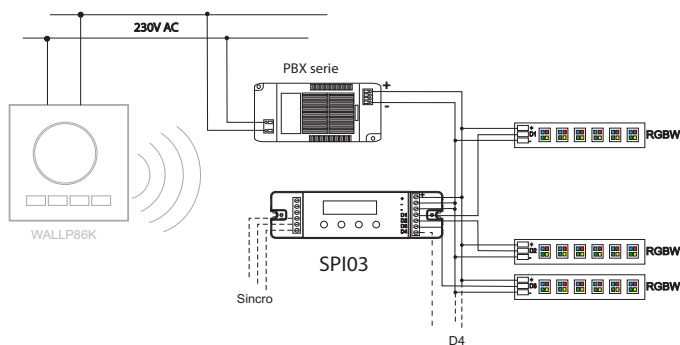

Datasheet download

Ricevitore RF 2,4GHz per strisce SPI

- Alimentazione 12/24V DC <1W
- Comanda strisce SPI 3 fili Dim/CCT/RGB/RGBW
- Comanda 4 strisce fino a 2048 punti
- Funzioni Dimmer/CCT/RGB/RGBW/SPI
- Scene/modi 29 Dim, 54 CCT, 136 RGB, RGBW
- Possibilità di funzionamento master o slave
- Display integrato per comando locale 4 tasti
- Possibile funzionamento stand-alone
- Compatibile con radiocomando A40RCR00N, A40RCDIMCT e touch control A40WALLWP86K
- Segnale 2,4GHz riceve fino a 20m
- Memoria di stato

RF receiver 2,4GHz for SPI led strips

- Working voltage 12/24V DC <1W
- Controls SPI strip 3 wires Dim/CCT/RGB/RGBW
- Controls up to 4 strips max 2048 dots
- Functions: Dimmer/CCT/RGB/RGBW/SPI
- Scene/mode 29 Dim, 54 CCT, 136 RGB, RGBW
- Operating mode: master or slave
- Built in display for 4 push button control
- Stand-alone operation possible
- Compatible with radio controls A40RCR00N, A40RCDIMCT and touch control A40WALLWP86K
- Signal 2,4GHz range up to 20m
- State memory

SPI03 RF Receiver SPI TW/DIM/RGB/RGBW

Smart Light Control

