



# WALL RF Control SPI/RGB/RGBW/TW/DIM

Smart Light Control



Part Number	Control	Input Wmax @ 90-265V	Output	Dimensions A x B x C x D x E
A40WALLWP86K	DIM/CCT/RGB/RGBW/SPI	0,8W (sleep) / 1,6W (action)	2.4 GHz	86 x 86 x 9,5 x 24 x 19,5

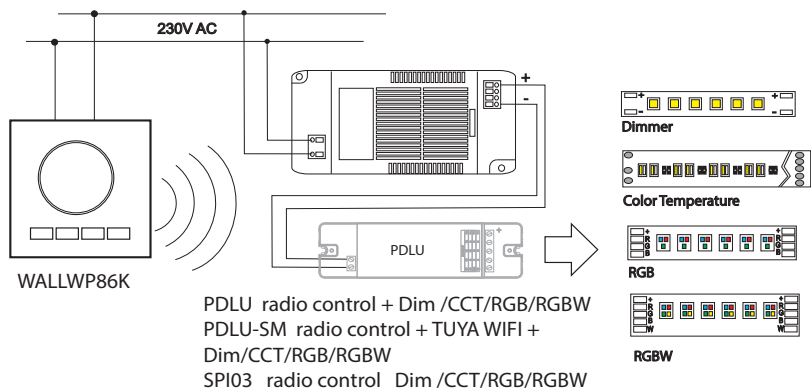

Datasheet download

## Centralina controllo a parete con manopola

- 4 zone indipendenti configurabili
- Display colore ad alta luminosità 1024 colori
- Alimentazione 90..240V basso consumo <1W
- Comanda centraline PDLU/ SM e altri controller SPI
- Facile programmazione
- Funzioni: Dimmer/CCT/RGB/RGBW/SPI
- Scene/modi 29 Dim, 54 CCT; 136 RGB. RGBW
- Funzione stand by
- Segnale 2,4GHz fino a 30m < 8db/m
- Installazione in scatola Ø 50mm standard
- Anche per pareti in cartongesso

## Wall-mounted control unit with knob

- 4 programmable independent areas
- High brightness display 1024 colours
- Power supply 90.. 240V low energy <1W
- Drives power controllers PDLU/ SM and SPI
- Easy to set up and program
- Functions: Dimmer/CCT/RGB/RGBW/SPI
- Scene/mode 29 Dim, 54 CCT; 136 RGB. RGBW
- Stand by function
- Signal 2,4GHz up to 30m < 8db/m
- Install in a standard Ø 50mm wall box
- Also for gypsum walls