





PLG

PROFESSIONAL LIGHTING GENIUS S.R.L.



**A story
at service
of Light**

About us

Viviamo nel mondo dell'illuminazione da oltre quarant'anni: la nostra storia è la garanzia migliore dell'elevata qualità dei prodotti PLG, mentre la passione, l'impegno e l'attenzione sono da sempre caratteristiche del nostro lavoro.

Abbiamo mosso i primi passi nella produzione di illuminazione ed **effetti scenici per lo spettacolo** emergendo fra i migliori produttori in Europa e nel mondo, distinguendoci per professionalità e competenza.

Forti della nostra esperienza e dotati di naturale propensione verso l'innovazione e la ricerca, siamo stati una delle prime aziende a confrontarci con una tecnologia innovativa ed in continua evoluzione come il LED, affermandoci anche in ambito architettonico, residenziale, industriale e paesaggistico.

Negli ultimi anni abbiamo fornito la giusta luce anche a quei settori meno coperti dal mercato illuminando e valorizzando ***l'arte sacra, vetrine e teche di gioiellerie e musei, negozi di alta moda.***


We have been living in the world of lighting for over forty years:


our history is the best guarantee of the high quality of PLG products, while passion, dedication, and attention to detail have always been the hallmarks of our work.

We took our first steps in the field of lighting and **scenic effects for the entertainment industry**, quickly emerging among the top manufacturers in Europe and around the world, recognized for our professionalism and expertise.

Thanks to our experience and our natural inclination towards innovation and research, we were one of the first companies to use an innovative and evolving technology as the LED, even establishing ourselves in the architectural, residential, industrial and landscape field.

In the last years we gave light even to those branches less covered by the market, lighting and giving value to **the sacred art, to jewelleries and museums' showcases and displays, couture's (high fashion) stores.**

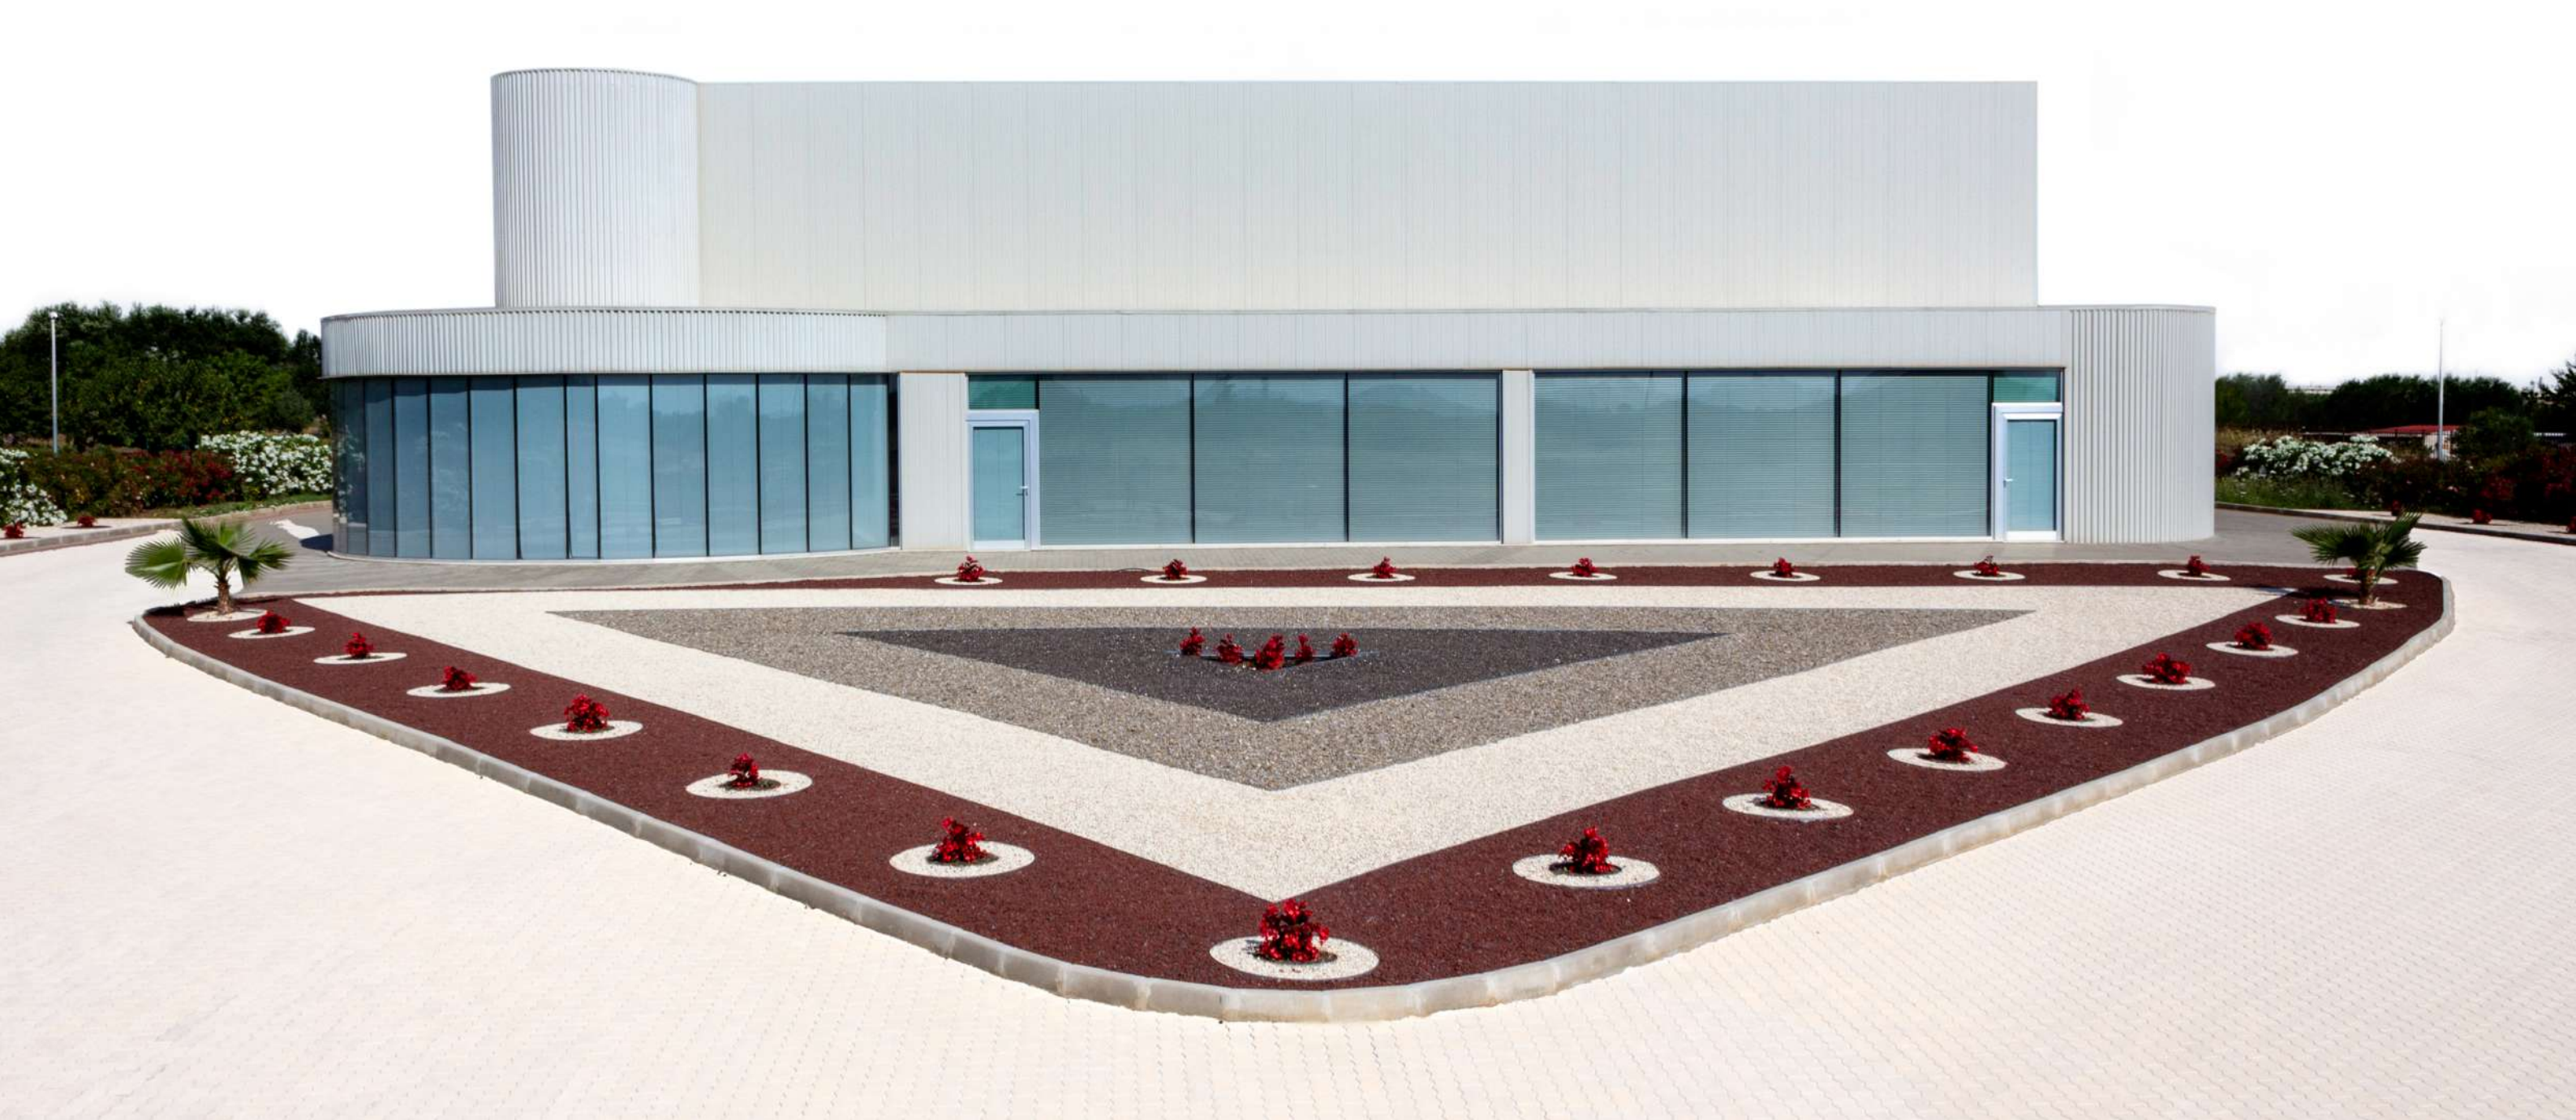

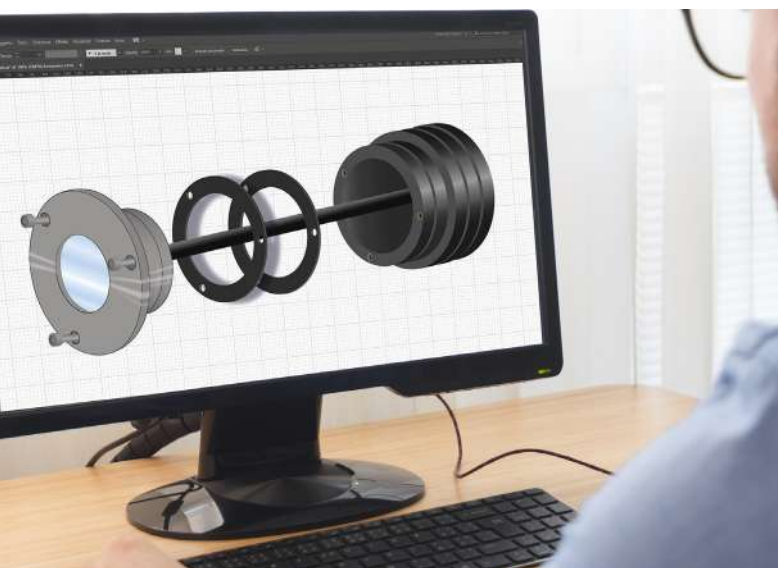

Dalla progettazione

Ricerca elettronica, ottica e meccanica: è da qui che nasce ogni nostra idea. Studiamo la luce nel dettaglio per dare forma a soluzioni efficienti, performanti e su misura. Nel nostro laboratorio, misuriamo ogni fascio luminoso con precisione assoluta, nel rispetto della normativa EN 13032.

Alla realizzazione

Tutte le fasi produttive, **dalla scelta della materia prima, al prodotto finito avvengono nella nostra sede.** Progettazione, meccanica, elettronica, verniciatura: tutto è sotto controllo. Ogni apparecchio viene testato, verificato e ottimizzato per garantire il massimo in sicurezza, efficienza e durata.


From design

Electronic, optical, and mechanical research: this is where every idea begins. We study light in detail to shape efficient, high-performance, and tailored solutions. In our laboratory, every light beam is measured with absolute precision, in compliance with EN 13032 standards.

To realization

All production stages, **from the choice of raw materials to the finished product, take place at our headquarters.** Design, mechanics, electronics, and painting: everything is under full control. Each device is tested, inspected, and optimized to ensure maximum safety, efficiency, and durability.




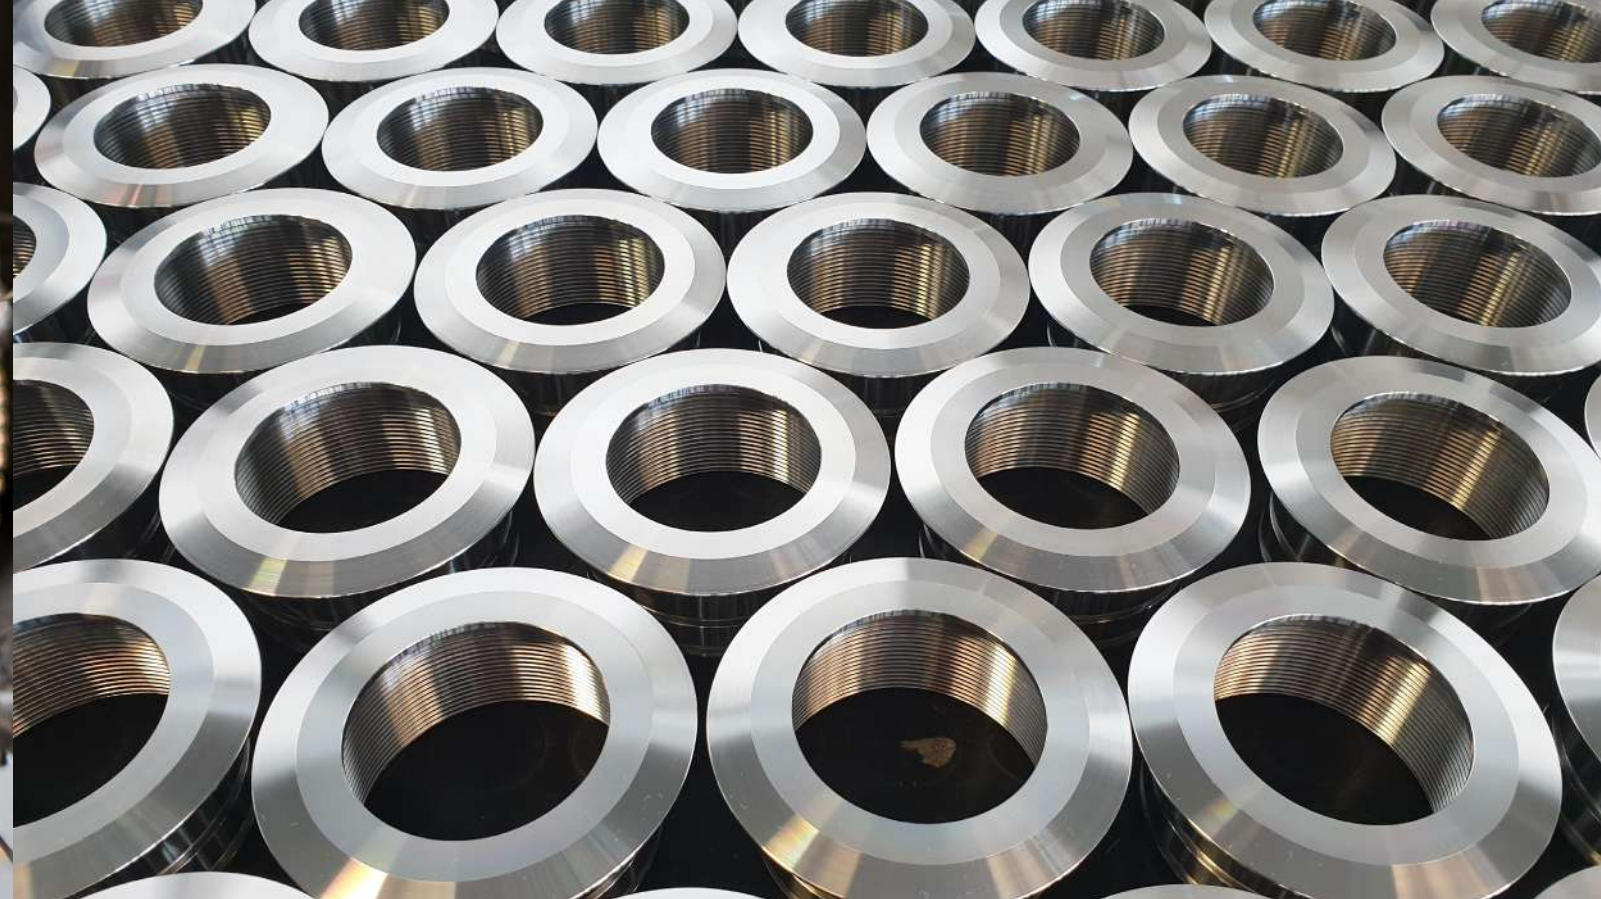

La lavorazione della materia prima, la progettazione tecnica, la produzione meccanica ed elettronica e l'intero processo di verniciatura (in polvere o liquida), dal lavaggio fino all'asciugatura in forno, **sono interamente realizzate nella nostra sede con meticolosità e precisione.**

The manufacturing process of the raw materials, the mechanical and electronical planning, the whole painting process (in powder or liquid) from washing to drying in the oven **are entirely made, with precision and meticulousness, in the company's premises.**



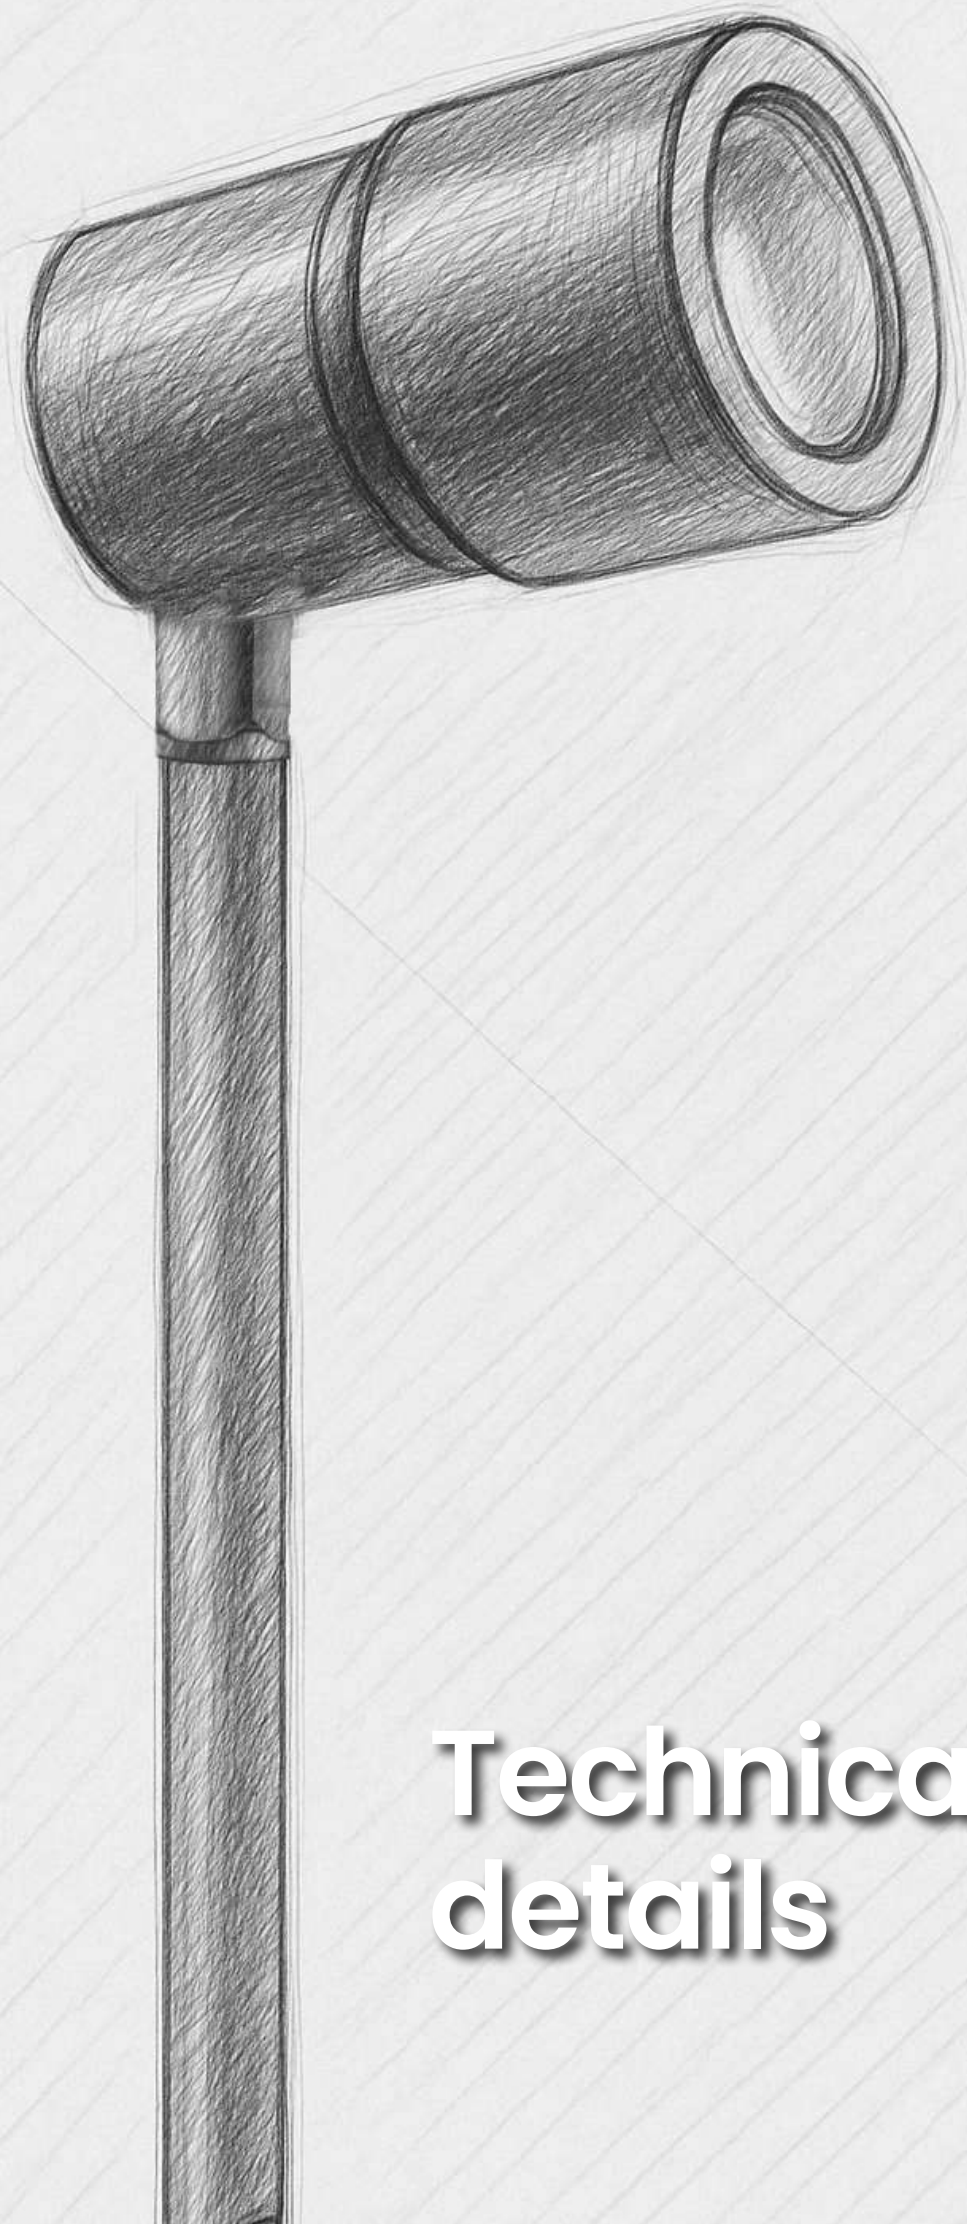

Technical details



S = Very Narrow Beam



N = Narrow Beam



M = Medium Beam



W = Wide Beam



X = Very Wide Beam



T = Transparent Glass
No optics



D = Diffused Glass
No optics



E = Elliptic Beam



R = Diffused 360°



A2 = Wall Washer Beam - Ceiling



A2 = Wall Washer Beam - Floor



L = Linear Beam



A = Asymmetric Beam



Ceiling Surface



Ceiling, Wall Surface
Ceiling, Wall Track



Ceiling, Bottom Up Surface
Wall, Bottom Up Track



Ceiling Recessed



Ceiling, Wall Recessed



Ceiling, Wall, Floor
Recessed



Surface Floor Fixing



Zoom



Different Optics Available



Adjustable Beam



Anti-glare System



Dimmer



Round Hole Dimension
Ø mm



Square Hole Dimension
Ø mm



Magnetic Application



Tear Resistant System



Conform To European Union
Norms



Energy Label



Flame Resistant



Water Resistant



UV Resistant



Solvent Resistant



Walk - Over



Drive - Over



Class 1
Fitted With Earth
Protection



Class 2
No Connection to
Electrical Earth



Class 3
Low Voltage System



IP20 Protection Against Solid Bodies
with diameter larger than 12mm.
No Protection against water



IP40 Protection Against Solid Bodies
with diameter larger than 1mm.
No Protection against water



IP65 Total Protection Against Dust
and Water Jet



IP67 Total Protection Against Dust
and Permanent Immersion



IP68 Total Protection Against Dust
and Temporary Immersion

INDEX

JEWELLERY&MUSEUM

Recessed	PAG 16
Appliques	PAG 28
Paletti	PAG 32
Rotating Lamps	PAG 40



INDOOR

Static Recessed	PAG 51
Backward Optic Recessed	PAG 56
Trimless Recessed	PAG 60
Adjustable Recessed	PAG 72
Wall Recessed	PAG 80
Ceiling and Wall Surface	PAG 84
Track Lights	PAG 94
Suspended	PAG 110



OUTDOOR

Spotlights	PAG 140
Inox spotlights	PAG 154
Floor Recessed	PAG 164
Grazing Lights	PAG 178
Ceiling Recessed	PAG 182
Backward Optic Recessed	PAG 194
Trimless Recessed	PAG 200
Wall Recessed	PAG 206
Linear Lights	PAG 218
Suspended	PAG 224
Wall Surface	PAG 234
Garden Lights	PAG 248
Bollards	PAG 322




GIRAFFE

Giraffe	PAG 338
Giraffe C	PAG 340
Giraffe D	PAG 342



CONTROLLERS

Constant Current Drivers	PAG 346
Constant Voltage Drivers	PAG 351

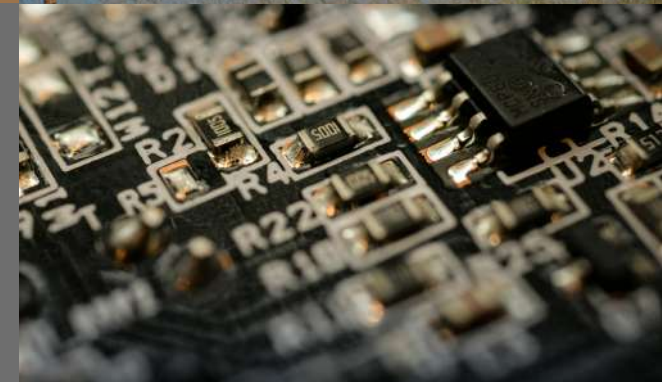

PLG presenta un'intera linea di apparecchi a LED specifici per l'illuminazione di vetrine e teche di gioiellerie, musei e negozi.

Faretti dalle dimensioni ridotte ma che assicurano comunque la massima efficienza luminosa ed energetica.

Apparecchi studiati per chi cerca la qualità della luce PLG per valorizzare al meglio i propri prodotti senza rinunciare al comfort visivo e senza l'ingombro di una sorgente luminosa invadente.

PLG presents an entire line of specific LED luminaires for the illumination of shop windows and showcases of jewellery, museums and shops.

Spotlights with reduced dimensions but which still ensure the maximum luminous and energy efficiency.

Luminaires designed for those seeking PLG light quality to give value to their products without sacrificing visual comfort and without the obstruction of an invasive light source.

01 – Jewellery & Museum



Section index



NIKE
PAG. 17



PIVOT
PAG. 18



MICRO FIX
PAG. 19



PIXYE
PAG. 20



MICRO JOY
PAG. 29



LILY
PAG. 30



TRIXYE
PAG. 31



NANOCOMET
PAG. 21



MICRO COMET
PAG. 22



MICRO COMET 3
PAG. 23



SIRIO R
PAG. 24



MINI JOY
PAG. 33



JOY
PAG. 34



JOY 3
PAG. 35



JOY ZOOM
PAG. 36



ZENITH
PAG. 25



ZENITHN 3
PAG. 25



JOY ZOOM R
PAG. 26



CORNER
PAG. 39



GLEE
PAG. 37



DELTA 9
PAG. 14



ROTOR LAMP 6
PAG. 41



ROTOR LAMP 12
PAG. 42



ROTOR LAMP 12 DW
PAG. 43

RECESSED

RECESSED

RECESSED

RECESSED

APPLIQUE

PALETTI


PALETTI

ROTOR LAMP



Recessed

Nike




Ø 17mm CE III IP40 10gr

POWER SUPPLY	max 1W - max 350mA	
CODE	NKM01	
LED COLOUR	A - Amber X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K C - Cool white 5500 K	
OPTICS	M 20° W 35° X 50° D Diff.	
FINISHES	W - White G - Grey B - Black	
LUMEN OUTPUT SOURCE	130lm (3000 K CRI90, 350mA)	
DELIVERED LUMEN OUTPUT	110lm (3000 K CRI90, 350mA, 50°)	
LED NUMBER	1 power LED	
MATERIAL	body in anodized aluminium, flange in anodized or painted aluminium	
DRIVER	not included, see pag. 347 and 350	
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable	
NOTES	other RAL on request	

PLG


Pivot



 Ø 32mm			 IP40	 30gr		
POWER SUPPLY		max 3W – max 700mA				
CODE		PIV01   				
LED COLOUR		A – Amber X – Warm white 2200 K J – Warm white 2700 K – CRI90 H – Warm white 3000 K – CRI90 N – Natural white 4000 K C – Cool white 5500 K				
OPTICS		  				
FINISHES		G – Grey B – Black				
LUMEN OUTPUT SOURCE		230lm (3000 K CRI90, 700mA)				
DELIVERED LUMEN OUTPUT		180lm (3000 K CRI90, 700mA , 50°)				
LED NUMBER		1 power LED				
MATERIAL		body and flange in anodized aluminium				
DRIVER		not included, see pag. 349 and 350				
POWER CABLE		includes 0,5 mt FEP 2 x 0,35 cable				
NOTES						

PLG


Micro Fix



 Ø 26mm			 IP40	 12gr		
POWER SUPPLY		max 1W – max 350mA				
CODE		MFX01   				
LED COLOUR		A – Amber X – Warm white 2200 K J – Warm white 2700 K – CRI90 H – Warm white 3000 K – CRI90 N – Natural white 4000 K C – Cool white 5500 K				
OPTICS		    				
FINISHES		W – White G – Grey B – Black				
LUMEN OUTPUT SOURCE		130lm (3000 K CRI90, 350mA)				
DELIVERED LUMEN OUTPUT		110lm (3000 K CRI90, 350mA, 40°)				
LED NUMBER		1 power LED				
MATERIAL		body in anodized aluminium, flange in anodized or painted aluminium				
DRIVER		not included, see pag. 347 and 350				
POWER CABLE		includes 0,5 mt FEP 2 x 0,35 cable				
NOTES		other RAL on request				

PLG


Pixye



POWER SUPPLY	max 1W - max 350mA
CODE	PXY01
LED COLOUR	A - Amber X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K C - Cool white 5500 K
OPTICS	
FINISHES	G - Grey B - Black
LUMEN OUTPUT SOURCE	130lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	110lm (3000 K CRI90, 350mA, 50°)
LED NUMBER	1 power LED
MATERIAL	body and flange in anodized aluminium
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
NOTES	

PLG


Nano Comet



POWER SUPPLY	max 1W - max 350mA
CODE	NCT01
LED COLOUR	A - Amber X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K C - Cool white 5500 K
OPTICS	
FINISHES	W - White G - Grey B - Black
LUMEN OUTPUT SOURCE	130lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	110lm (3000 K CRI90, 350mA, 50°)
LED NUMBER	1 power LED
MATERIAL	body in anodized aluminium, flange in painted aluminium
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
NOTES	other RAL on request

PLG


Micro Comet



Ø 37mm CE III IP40 40gr A A+ A++	
POWER SUPPLY	max 3W - max 700mA
CODE	MCT01
LED COLOUR	A - Amber X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K C - Cool white 5500 K
OPTICS	N 10° M 25° W 40° X 60° E 30°x65°
FINISHES	W - White G - Grey B - Black
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	215lm (3000 K CRI90, 700mA, 40°)
LED NUMBER	1 power LED
MATERIAL	body in anodized aluminium, flange in painted aluminium
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
NOTES	other RAL on request

PLG


Micro Comet 3

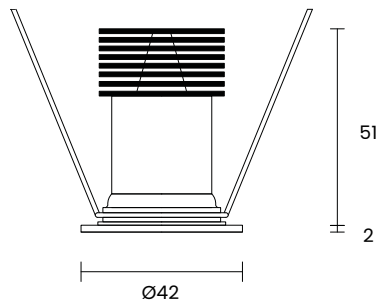

Ø 37mm CE III IP40 50gr A A+ A++	
POWER SUPPLY	max 3W - max 350mA
CODE	MCT03
LED COLOUR	A - Amber X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K C - Cool white 5500 K
OPTICS	N 15° M 25° W 35° E 40°x17°
FINISHES	W - White G - Grey B - Black
LUMEN OUTPUT SOURCE	390lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	310lm (3000 K CRI90, 350mA, 35°)
LED NUMBER	3 power LEDs
MATERIAL	body in anodized aluminium, flange in painted aluminium
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
NOTES	other RAL on request

PLG

Sirio r

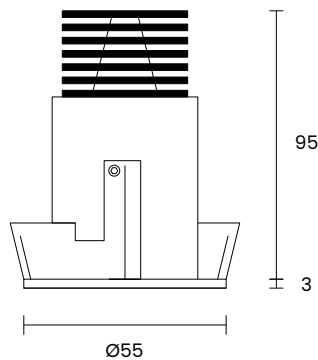


Ø 47mm CE III 150gr IP40



POWER SUPPLY	max 3W - max 700mA
CODE	SRR01
LED COLOUR	A - Amber X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K C - Cool white 5500 K
OPTICS	
FINISHES	W - White G - Grey B - Black K - Corten
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	170lm (3000 K CRI90, 700mA, 3°)
LED NUMBER	1 power LED
MATERIAL	body in anodized aluminium, flange in painted aluminium
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 1,5 mt 2 x 0,50 cable
NOTES	other RAL on request


Ø 47mm CE III 150gr IP40



max 6W - max 700mA	
SRR02	
X - Warm white	2200 K
J - Warm white	2700 K - CRI90
H - Warm white	3000 K - CRI90
N - Natural white	4000 K
	
W - White	
G - Grey	
B - Black	
K - Corten	
800lm (3000 K CRI90, 700mA)	
430lm (3000 K CRI90, 700mA , 25°)	
1 power LED multichip	
body in anodized aluminium, flange in painted aluminium	
not included, see pag. 349 and 350	
includes 1,5 mt 2 x 0,50 cable	
other RAL on request	

PLG

Zenith




Ø 40mm CE III 50gr IP40



POWER SUPPLY	max 3W - max 700mA
CODE	ZNT01
LED COLOUR	A - Amber X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K C - Cool white 5500 K
OPTICS	
FINISHES	G - Grey B - Black
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	215lm (3000 K CRI90, 700mA, 40°)
LED NUMBER	1 power LED
MATERIAL	body and flange in anodized aluminium
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
NOTES	

PLG

Zenith 3




Ø 40mm CE III 50gr IP40



max 3W - max 350mA	
ZNT03	
A - Amber	
X - Warm white	2200 K
J - Warm white	2700 K - CRI90
H - Warm white	3000 K - CRI90
N - Natural white	4000 K
C - Cool white	5500 K
 N 10°  M 25°  W 35°  E 40°x17°	
G - Grey	
B - Black	
390lm (3000 K, 350mA)	
310lm (3000 K, 350mA , 35°)	
3 power LEDs	
body and flange in anodized aluminium	
not included, see pag. 347 and 350	
includes 0,5 mt FEP 2 x 0,35 cable	




Joy Zoom r



						
POWER SUPPLY		max 3W - max 700mA				
CODE		JZR01   				
LED COLOUR		A - Amber X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K C - Cool white 5500 K				
OPTICS		z - 8° > 45°				
FINISHES		B - Black				
LUMEN OUTPUT SOURCE		230lm (3000 K CRI90, 700mA)				
DELIVERED LUMEN OUTPUT		185lm (3000 K CRI90, 700mA)				
LED NUMBER		1 power LED				
MATERIAL		body in anodized aluminium				
DRIVER		not included, see pag. 349 and 350				
POWER CABLE		includes 0,5 mt FEP 2 x 0,35 cable				
NOTES						

PLG

Delta 9





					
POWER SUPPLY		max 18W - max 500mA			
CODE		DLT09   			
LED COLOUR		A - Amber X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K C - Cool white 5500 K B - Blue			
OPTICS		   			
FINISHES		W - White G - Grey B - Black			
LUMEN OUTPUT SOURCE		1620lm (3000 K CRI90, 500mA)			
DELIVERED LUMEN OUTPUT		1530lm (3000 K CRI90, 500mA, 40°)			
LED NUMBER		1 power LED			
MATERIAL		body in anodized aluminium, cover in painted aluminium			
DRIVER		not included, see pag. 348 and 350			
POWER CABLE		includes 0,5 mt FEP 2 x 0,35 cable			
NOTES		led colours combinable on request, other RAL on request			

PLG


Appliques



Micro Joy

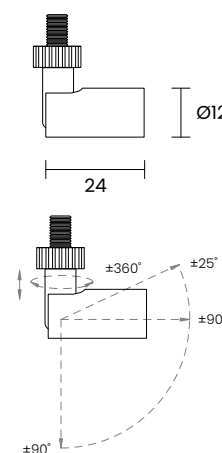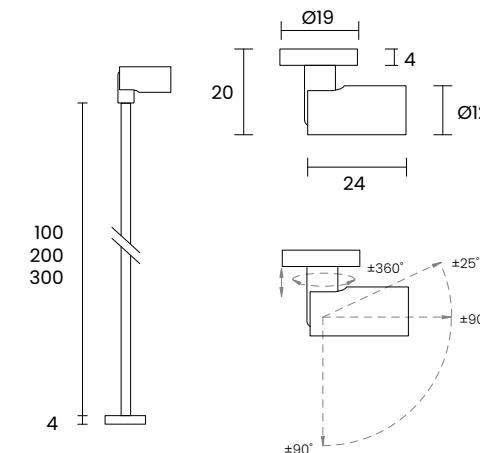



POWER SUPPLY	max 1W - max 350mA
CODE	MCJ01
LED COLOUR	A - Amber X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	M 20° W 35° X 50°
FINISHES	G - Grey B - Black
FIXING OPTIONS	Applique
LUMEN OUTPUT SOURCE	130lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	110lm (3000 K CRI90, 350mA, 50°)
LED NUMBER	1 power LED
MATERIAL	body in anodized aluminium
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
NOTES	Extension CODE: EXT01 01 - 100 mm 02 - 200 mm 03 - 300 mm



POWER SUPPLY	max 1W - max 350mA
CODE	MCJ02
LED COLOUR	A - Amber X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	M 20° W 35° X 50°
FINISHES	G - Grey B - Black
FIXING OPTIONS	Ring Nut
LUMEN OUTPUT SOURCE	130lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	110lm (3000 K CRI90, 350mA, 50°)
LED NUMBER	1 power LED
MATERIAL	body in anodized aluminium
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
NOTES	

PLG




Lily

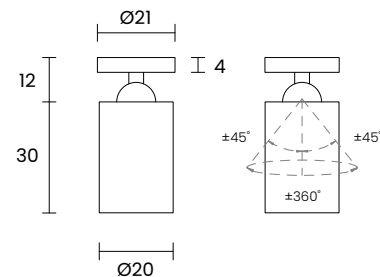

POWER SUPPLY	max 2W - max 500mA		
CODE	LYL01		
LED COLOUR	A - Amber X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K C - Cool white 5500 K		
OPTICS	N M W X 15° 25° 40° 60°		
FINISHES	G - Grey B - Black		
FIXING OPTIONS	1 - Applique 2 - Springs 3 - Ring Nut 4 - Magnetic		
LUMEN OUTPUT SOURCE	180lm (3000 K CRI90, 500mA)		
DELIVERED LUMEN OUTPUT	160lm (3000 K CRI90, 500mA, 40°)		
LED NUMBER	1 power LED		
MATERIAL	body and flange in anodized aluminium		
DRIVER	not included, see pag. 348 and 350		
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable		
NOTES			

PLG

Trixye

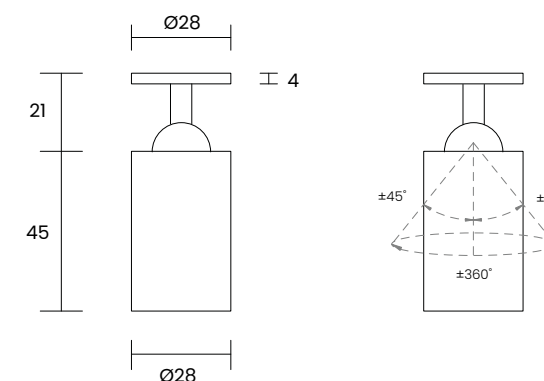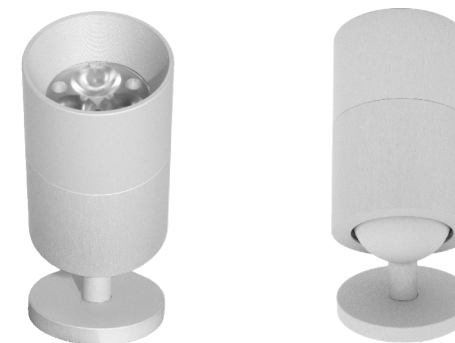


POWER SUPPLY	max 3W – max 350mA
CODE	TXY03    
 LED COLOUR	A – Amber X – Warm white 2200 K J – Warm white 2700 K – CRI90 H – Warm white 3000 K – CRI90 N – Natural white 4000 K C – Cool white 5500 K
 OPTICS	    15° 25° 35° 40°x17°
 FINISHES	G – Grey B – Black
 FIXING OPTIONS	1 – Applique 2 – Springs 3 – Ring Nut 4 – Magnetic
LUMEN OUTPUT SOURCE	390lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	310lm (3000 K CRI90, 350mA, 35°)
LED NUMBER	3 power LEDs
MATERIAL	body and flange in anodized aluminium
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
NOTES	


PLG



Paletti

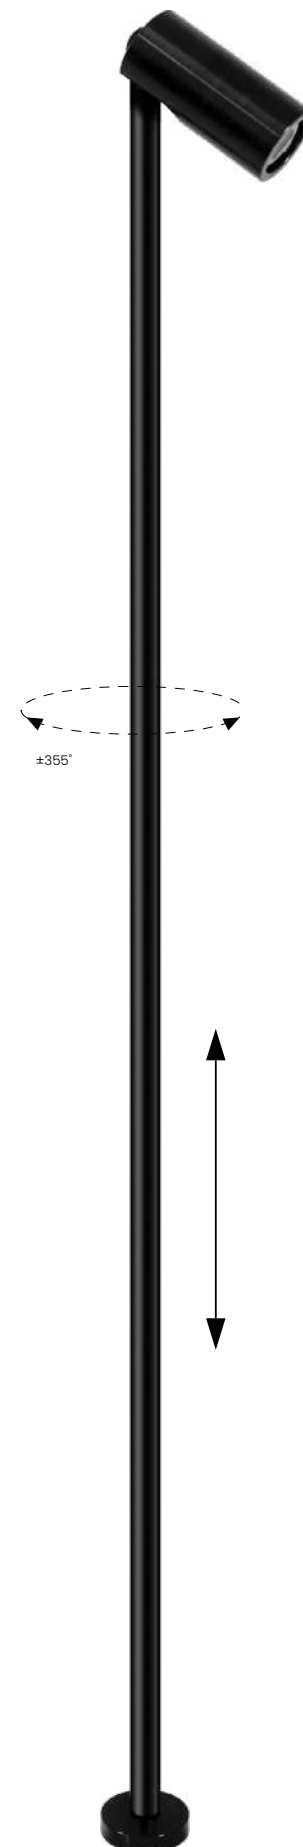



Mini Joy

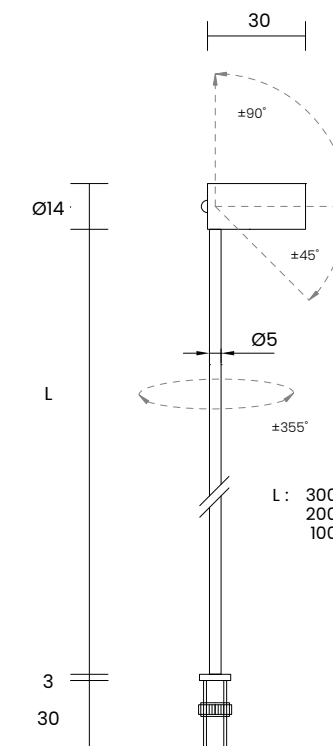

POWER SUPPLY	max 2W - max 500mA
CODE	MJY01 ■ ■ ■ ■
LED COLOUR	A - Amber X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K C - Cool white 5500 K
OPTICS	M W X 20° 35° 50°
FINISHES	G - Grey B - Black
STEM LENGTH	1 - 100 mm 2 - 200 mm 3 - 300 mm
LUMEN OUTPUT SOURCE	180lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	150lm (3000 K CRI90, 500mA, 50°)
LED NUMBER	1 power LED
MATERIAL	body and stem in anodized aluminium
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
NOTES	

PLG



Joy

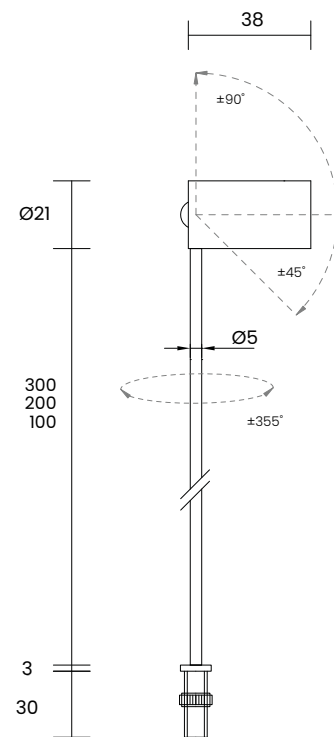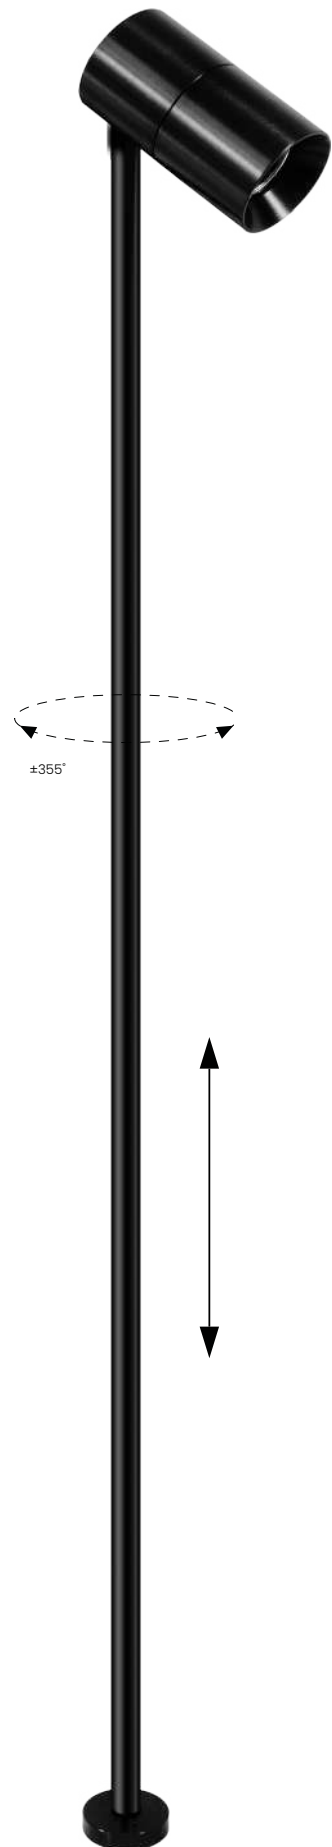

        	
POWER SUPPLY	max 2W - max 500mA
CODE	JOY01    
 LED COLOUR	A - Amber X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K C - Cool white 5500 K
 OPTICS	 15°  25°  40°  60°
 FINISHES	G - Grey B - Black
 STEM LENGTH	1 - 100 mm 2 - 200 mm 3 - 300 mm
LUMEN OUTPUT SOURCE	180lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	165lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED
MATERIAL	body and stem in anodized aluminium
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
NOTES	

PLG




Joy 3

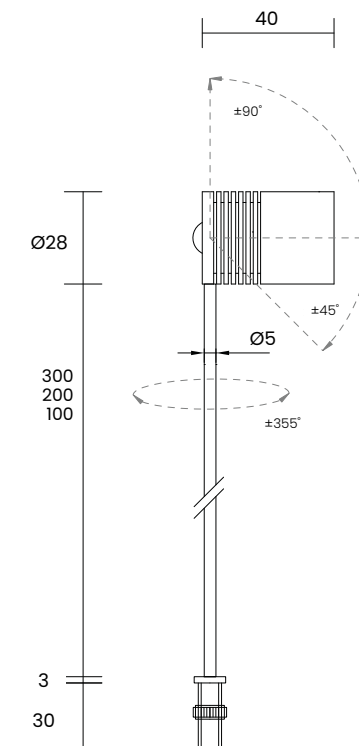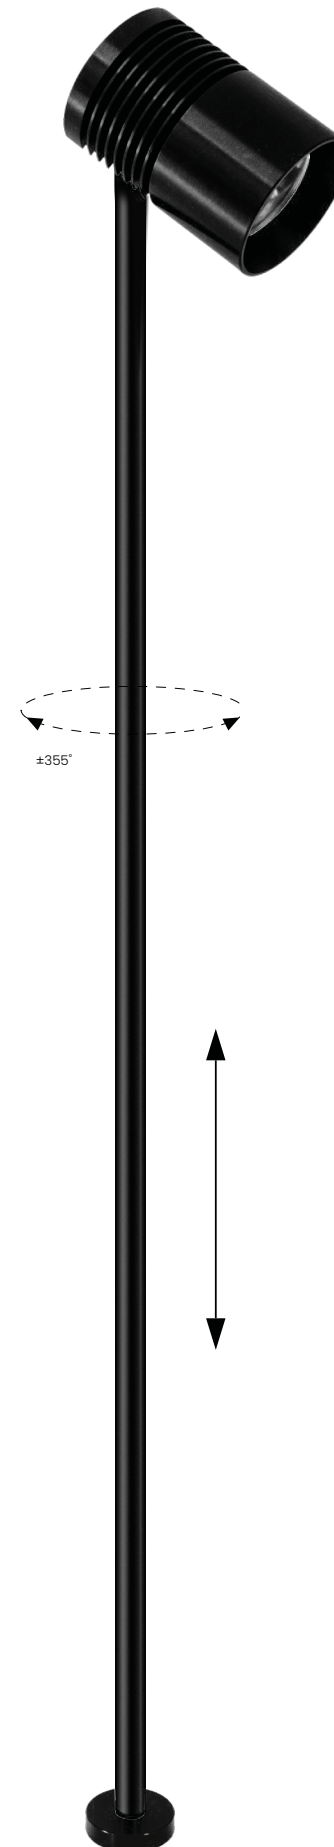

 Ø 10mm			 IP40					
POWER SUPPLY			max 3W - max 350mA					
CODE			JOY03    					
LED COLOUR			A - Amber X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K C - Cool white 5500 K					
OPTICS			 15°  25°  35°  40° x 17°					
FINISHES			G - Grey B - Black					
STEM LENGTH			1 - 100 mm 2 - 200 mm 3 - 300 mm					
LUMEN OUTPUT SOURCE			390lm (3000 K CRI90, 350mA)					
DELIVERED LUMEN OUTPUT			310lm (3000 K CRI90, 350mA, 35°)					
LED NUMBER			3 power LEDs					
MATERIAL			body and stem in anodized aluminium					
DRIVER			not included, see pag. 347 and 350					
POWER CABLE			includes 0,5 mt FEP 2 x 0,35 cable					
NOTES								

PLG

Joy Zoom

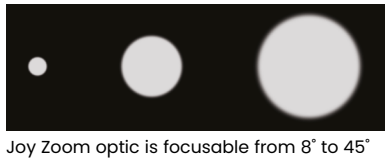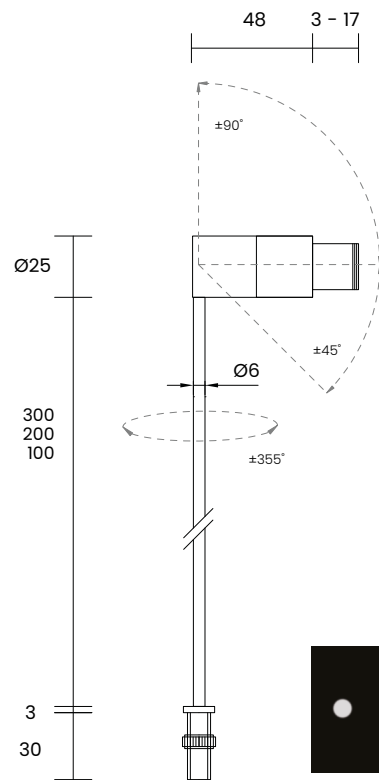
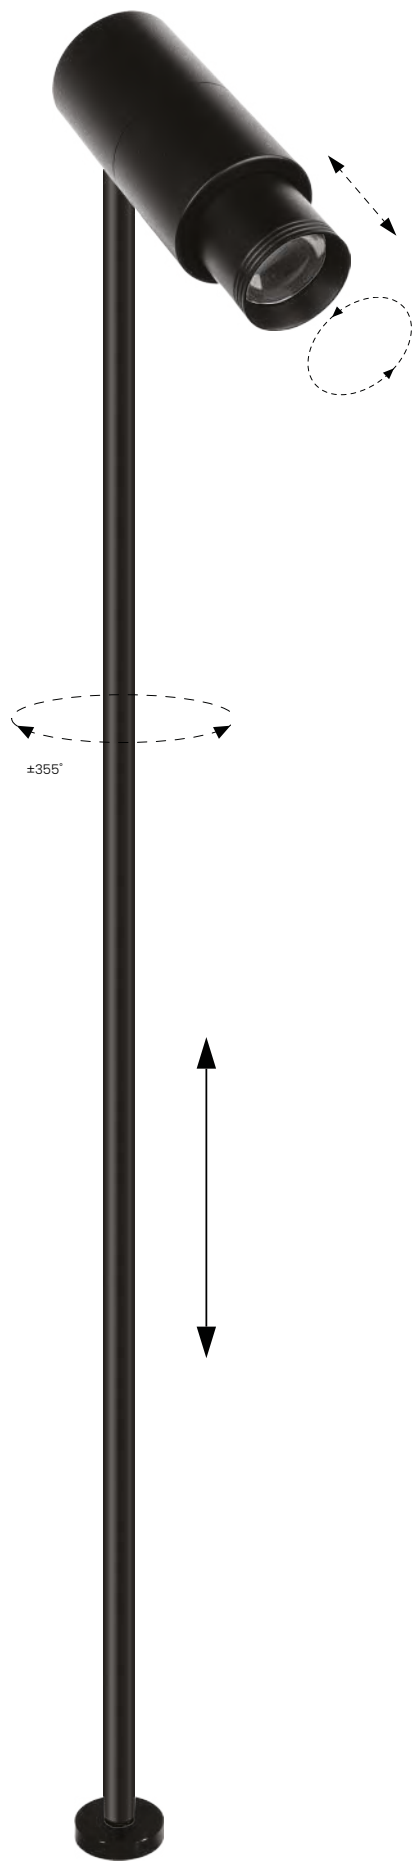


Joy Zoom optic is focusable from 8° to 45°

Ø 10mm	CE	III	85gr	IP40	8° > 45°	A A+ A++
POWER SUPPLY		max 3W - max 700mA				
CODE		JOZ01				
LED COLOUR		A - Amber X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K C - Cool white 5500 K				
OPTICS		z - 8° > 45°				
FINISHES		B - Black				
STEM LENGTH		1 - 100 mm 2 - 200 mm 3 - 300 mm				
LUMEN OUTPUT SOURCE		230lm (3000 K CRI90, 700mA)				
DELIVERED LUMEN OUTPUT		185lm (3000 K CRI90, 700mA)				
LED NUMBER		1 power LED				
MATERIAL		body and stem in anodized aluminium				
DRIVER		not included, see pag. 349 and 350				
POWER CABLE		includes 0,5 mt FEP 2 x 0,35 cable				
NOTES						


PLG

Glee

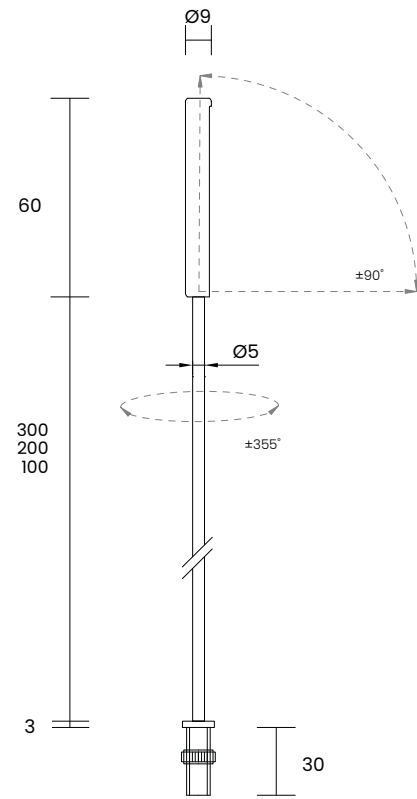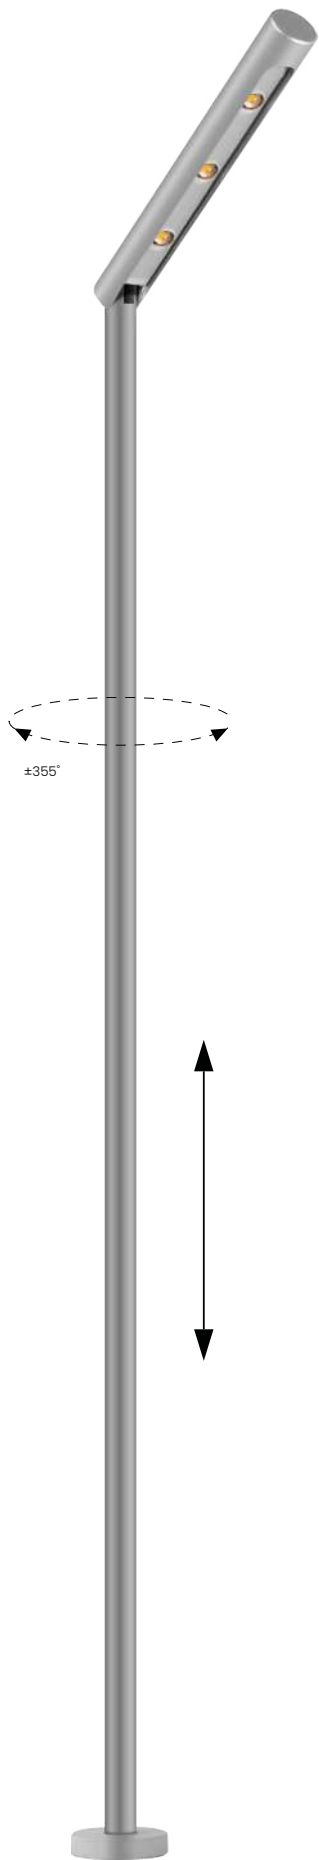


 Ø 10mm			 25gr			
POWER SUPPLY		max 3W - max 250mA				
CODE		GLE03    				
LED COLOUR		A - Amber X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K C - Cool white 5500 K				
OPTICS		 110°				
FINISHES		G - Grey B - Black				
STEM LENGTH		1 - 100 mm 2 - 200 mm 3 - 300 mm				
LUMEN OUTPUT SOURCE		270lm (3000 K CRI90, 250mA)				
DELIVERED LUMEN OUTPUT		210lm (3000 K CRI90, 250mA, 110°)				
LED NUMBER		3 power LEDs				
MATERIAL		body and stem in anodized aluminium				
DRIVER		not included, see pag. 346 and 350				
POWER CABLE		includes 0,5 mt FEP 2 x 0,35 cable				
NOTES						

PLG

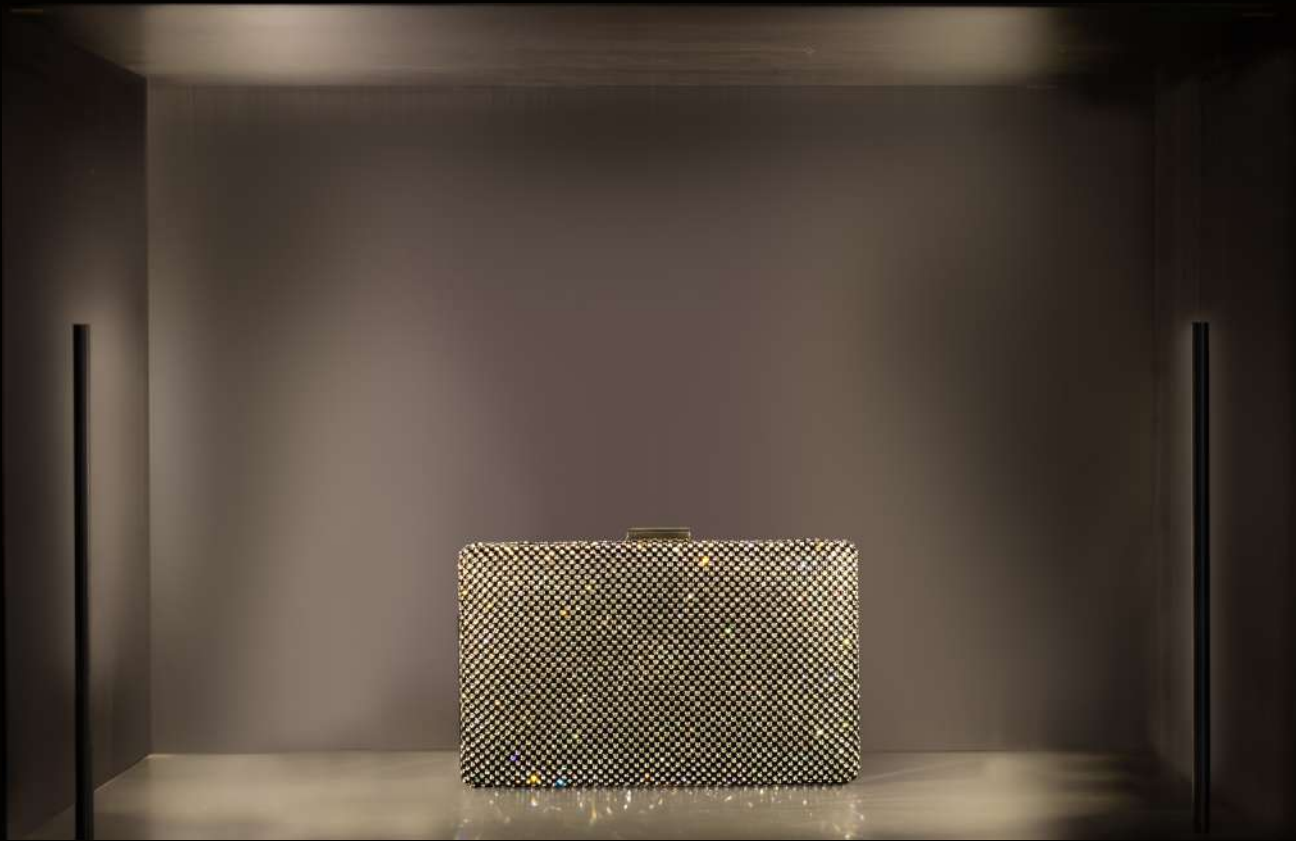

Corner

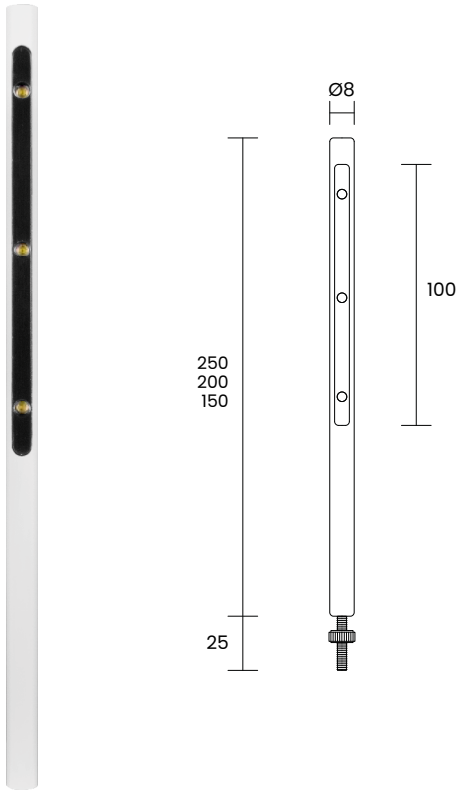

POWER SUPPLY	max 3W - max 350mA	
CODE	CRN03 ■ ■ ■ ■	
LED COLOUR	A - Amber	
	X - Warm white	2200 K
	J - Warm white	2700 K - CRI90
	H - Warm white	3000 K - CRI90
	N - Natural white	4000 K
	C - Cool white	5500 K
OPTICS	 110°	
FINISHES	W - White	
	G - Grey	
	B - Black	
STEM LENGTH	1 - 150 mm	
	2 - 200 mm	
	3 - 250 mm	
LUMEN OUTPUT SOURCE	390lm (3000 K CRI90, 350mA)	
DELIVERED LUMEN OUTPUT	240lm (3000 K CRI90, 350mA, 110°)	
LED NUMBER	3 power LEDs	
MATERIAL	body in anodized or painted aluminium	
DRIVER	not included, see pag. 347 and 350	
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable	
NOTES	other RAL on request	


PLG



Rotating Lamps



Rotor Lamp 6

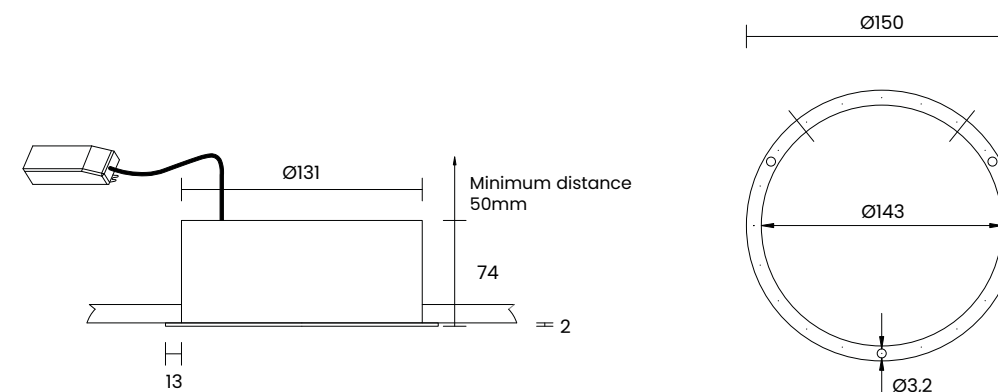

Ø 132mm CE 950gr IP20 A A+ A++

POWER SUPPLY max 12W - 220V/240V

CODE RTL06

LED COLOUR

X - Warm white	2200 K
J - Warm white	2700 K - CRI90
H - Warm white	3000 K - CRI90
N - Natural white	4000 K
C - Cool white	5500 K

OPTICS

N	M	W	X
10°	25°	40°	60°

FINISHES

W - White
G - Grey
B - Black

LUMEN OUTPUT SOURCE 1080lm (3000 K CRI90, 500mA)

DELIVERED LUMEN OUTPUT 840lm (3000 K CRI90, 500mA, 40°)

LED NUMBER 6 power LEDs + 3 RGB LEDs Ø5mm


MATERIAL body in painted aluminium

DRIVER included - dim. 163 x 43 x 32mm, remote control included

NOTES led colours combinable on request, other RAL on request, brightness can be controlled through the remote control

PLG


Rotor Lamp 12

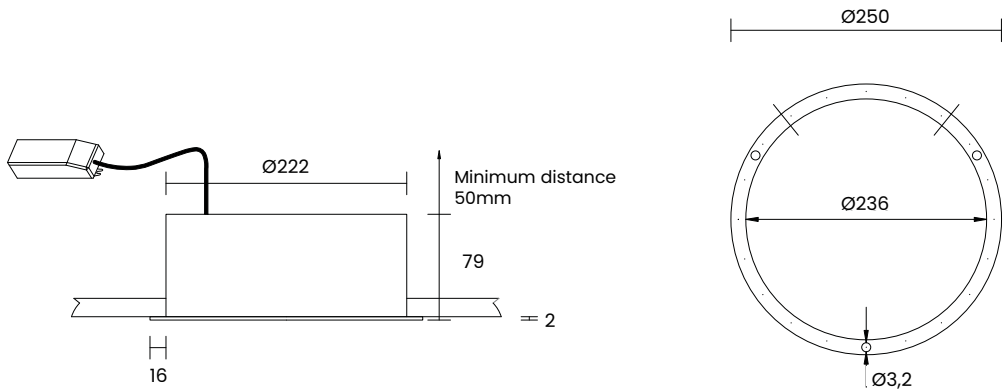

POWER SUPPLY	max 24W - 220V/240V
CODE	RTL12
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K- CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K C - Cool white 5500 K
OPTICS	N 10° M 25° W 40° X 60°
FINISHES	W - White G - Grey B - Black
LUMEN OUTPUT SOURCE	2160lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	1680lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	12 power LEDs + 6 RGB LEDs Ø5mm
MATERIAL	body in painted aluminium
DRIVER	included - dim. 163 x 43 x 32mm, remote control included
NOTES	led colours combinable on request, other RAL on request, brightness can be controlled through the remote control

PLG

Rotor Lamp 12 DW

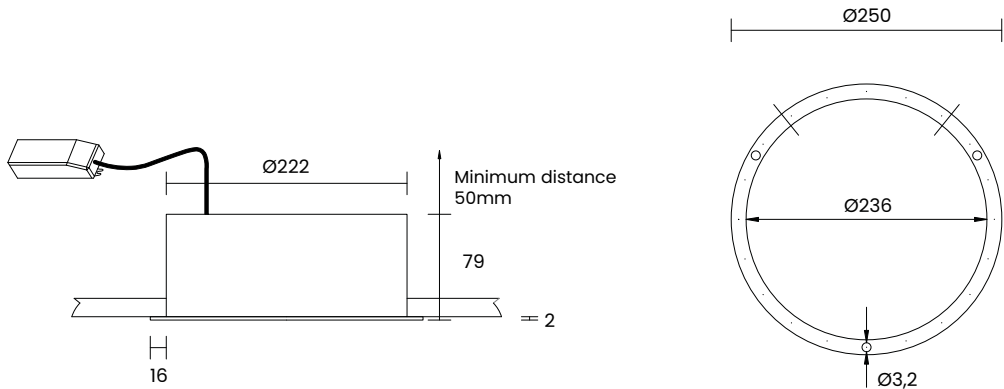

POWER SUPPLY	max 24W - 220V/240V
CODE	RTL12
LED COLOUR	K - Dynamic white
OPTICS	N 10° M 25° W 40° X 60°
FINISHES	W - White G - Grey B - Black
LUMEN OUTPUT SOURCE	2160lm (3000 K, 500mA)
DELIVERED LUMEN OUTPUT	1680lm (3000 K, 500mA, 40°)
LED NUMBER	12 power LEDs + 6 RGB LEDs Ø5mm
MATERIAL	body in painted aluminium
DRIVER	included - dim. 163 x 43 x 32mm, remote control included
NOTES	other RAL on request, brightness and colour temperature can be controlled through the remote control

PLG

PLG dispone di un'ampia varietà, in costante aggiornamento, di apparecchi LED per l'illuminazione di ambienti interni.

Fissi, orientabili, antiabbagliamento, con dimensioni, finiture e fasci luminosi differenti, i dispositivi PLG sono progettati per adattarsi ad ogni necessità e configurazione architettonica dell'ambiente da illuminare, garantendo sempre benessere visivo, efficienza energetica e alta qualità cromatica.

PLG has a wide variety, constantly updated, of LED light luminaires for indoor spaces.

Static, adjustable, anti-glare, with different sizes, finishes and beams, PLG devices are designed to adapt themselves to all needs and architectural setting of the location to be illuminated, always ensuring visual wellness, energetic efficiency and high chromatic quality.

02 - Indoor



Section index

STATIC
RECESSED



PHANTOM B
PAG 51



PHANTOM PLUS B
PAG 52



AURA
PAG 53



RAZE 6
PAG 66



RAZE C6
PAG 67



RAZE C9
PAG 68



RAZE C12
PAG 69

STATIC
RECESSED



DAFNE
PAG 54



APOLLO
PAG 55



MINI FOXY R
PAG 73



FOXY R
PAG 75



FOXY R 10
PAG 76

BACKWARD
OPTIC



DAFNE DEEP
PAG 57



APOLLO DEEP
PAG 59



PUNTO R 3
PAG 77



PUNTO R 6
PAG 78



PUNTO R 10
PAG 79

TRIMLESS
RECESSED



PHANTOM
PAG 61



PHANTOM PLUS
PAG 63



RAZE
PAG 64



RAZE 3
PAG 65



SOTTILE 3
PAG 81



SOTTILE 6
PAG 83

TRIMLESS
RECESSED

ADJUSTABLE
RECESSED

ADJUSTABLE
RECESSED

WALL
RECESSED

Section index



MINI FOXY
PAG 85



FOXY
PAG 86



FOXY 10
PAG 87



SIRIO A
PAG 88



FOXY 10 B
PAG 99



PUNTO 3 B
PAG 101



PUNTO 6 B
PAG 102



PUNTO 10 B
PAG 103



PUNTO 3
PAG 89



PUNTO 6
PAG 90



PUNTO 10
PAG 91



PUNTO 3 B SUSPENDED
PAG 104



PUNTO 6 B SUSPENDED
PAG 105



PUNTO 10 B SUSPENDED
PAG 106



FLAT A
PAG 93



FLAT
PAG 93



CANDELA 3 B
PAG 107



CANDELA 6 B
PAG 108



CANDELA 10 B
PAG 109



JOY B
PAG 95



JOY ZOOM B
PAG 96



MINI FOXY B
PAG 97



FOXY B
PAG 98



PUNTO 3 SUSPENDED
PAG 111



PUNTO 6 SUSPENDED
PAG 112



PUNTO 10 SUSPENDED
PAG 113

CEILING AND
WALL SURFACE

CEILING AND
WALL SURFACE

CEILING AND
WALL SURFACE

TRACK
LIGHTS

TRACK
LIGHTS



TRACK
LIGHTS

TRACK
LIGHTS

SUSPENDED

Section index


Phantom B

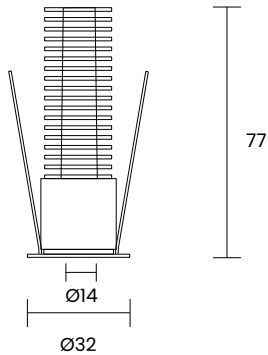


POWER SUPPLY	max 4W - max 1200mA
CODE	PHB01
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N 15° M 25° W 40° X 60°
FINISHES	W - White G - Grey B - Black
LUMEN OUTPUT SOURCE	320lm (3000 K CRI90, 1200mA)
DELIVERED LUMEN OUTPUT	250lm (3000 K CRI90, 1200mA, 40°)
LED NUMBER	1 power LED
MATERIAL	body in anodized aluminium, flange in painted aluminium
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
NOTES	other RAL on request, 24V version on request


PLG

Phantom Plus B

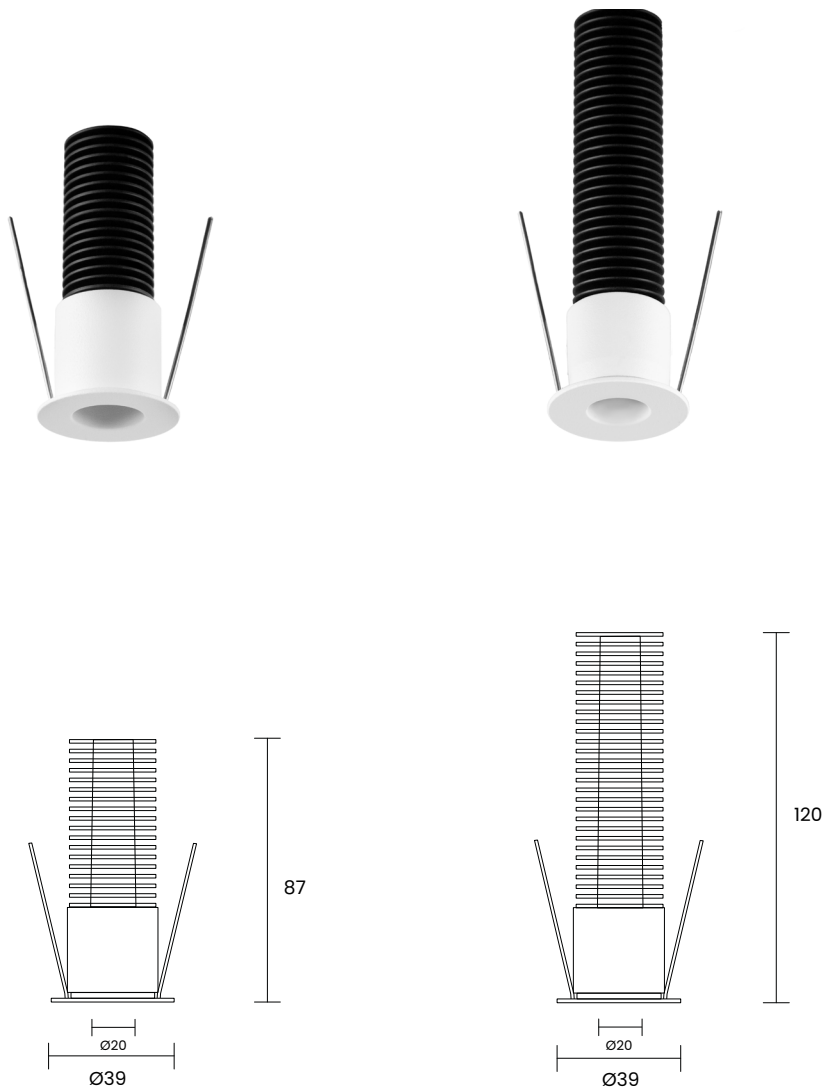



POWER SUPPLY	max 6W - max 500mA
CODE	PHPB1 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90
OPTICS	
FINISHES	W - White G - Grey B - Black
LUMEN OUTPUT SOURCE	860lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	400lm (3000 K CRI90, 500mA, 30°)
LED NUMBER	1 power LED
MATERIAL	body in anodized aluminium, flange in painted aluminium
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
NOTES	other RAL on request, 24V version on request




POWER SUPPLY	max 8W - max 700mA
CODE	PHPB2 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90
OPTICS	
FINISHES	W - White G - Grey B - Black
LUMEN OUTPUT SOURCE	1200lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	530lm (3000 K CRI90, 700mA, 30°)
LED NUMBER	1 power LED
MATERIAL	body in anodized aluminium, flange in painted aluminium
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
NOTES	other RAL on request, 24V version on request

Aura



POWER SUPPLY	max 5W - max 500mA
CODE	AUR01 ■ ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	
FINISHES	W - White G - Grey B - Black K - Corten
LUMEN OUTPUT SOURCE	570lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	510lm (3000 K CRI90, 500mA, 45°)
LED NUMBER	1 power LED multichip
MATERIAL	body in anodized aluminium, flange in painted aluminium
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
ACCESSORIES	honeycomb code: NID09
NOTES	other RAL on request, 24V version on request


Dafne



 Ø 45mm			 IP40				
POWER SUPPLY		max 6W - max 700mA					
CODE		DF006   					
LED COLOUR		J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K					
OPTICS		   					
FINISHES		W - White G - Grey B - Black K - Corten					
LUMEN OUTPUT SOURCE		800lm (3000 K CRI90, 700mA)					
DELIVERED LUMEN OUTPUT		670lm (3000 K CRI90, 700mA, 40°)					
LED NUMBER		1 power LED multichip					
MATERIAL		body in anodized aluminium, flange in painted aluminium					
DRIVER		not included, see pag. 349 and 350					
POWER CABLE		includes 1 mt FEP 2 x 0,5 cable					
NOTES		other RAL on request, 24V version on request					

PLG

Apollo





 Ø 55mm			 IP40				
POWER SUPPLY		max 9W - max 500mA					
CODE		APL09   					
LED COLOUR		J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K					
OPTICS		   					
FINISHES		W - White G - Grey B - Black K - Corten					
LUMEN OUTPUT SOURCE		1260lm (3000 K CRI90, 500mA)					
DELIVERED LUMEN OUTPUT		1066lm (3000 K CRI90, 500mA, 40°)					
LED NUMBER		1 power LED multichip					
MATERIAL		body in anodized aluminium, flange in painted aluminium					
DRIVER		not included, see pag. 348 and 350					
POWER CABLE		includes 1 mt 2 x 0,5 cable					
NOTES		other RAL on request, 24V version on request					

PLG

Backward Optic Recessed




Dafne deep



POWER SUPPLY	max 6W - max 700mA
CODE	DFD06 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X 20° 30° 40° 60°
FINISHES	W - White G - Grey B - Black K - Corten
LUMEN OUTPUT SOURCE	800lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	670lm (3000 K CRI90, 700mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	body in anodized aluminium, flange in painted aluminium
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
NOTES	other RAL on request, 24V version on request

PLG

Apollo deep


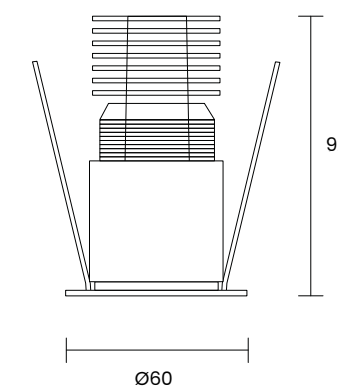


POWER SUPPLY	max 9W - max 500mA		
CODE	APD09 ■ ■ ■		
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K		
OPTICS	N M W X 20° 30° 40° 60°		
FINISHES	W - White G - Grey B - Black K - Corten		
LUMEN OUTPUT SOURCE	1260lm (3000 K CRI90, 500mA)		
DELIVERED LUMEN OUTPUT	1066lm (3000 K CRI90, 500mA, 40°)		
LED NUMBER	1 power LED multichip		
MATERIAL	body in anodized aluminium, flange in painted aluminium		
DRIVER	not included, see pag. 348 and 350		
POWER CABLE	includes 1 mt 2 x 0,5 cable		
NOTES	other RAL on request, 24V version on request		

PLG

Trimless Recessed

Phantom

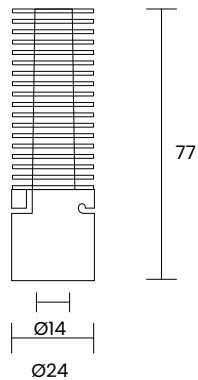


POWER SUPPLY	max 4W - max 1200mA
CODE	PHT01 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X 15° 25° 40° 60°
FINISHES	W - White G - Grey B - Black
LUMEN OUTPUT SOURCE	320lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	250lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED
MATERIAL	body in anodized aluminium, flange in painted aluminium
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
ACCESSORIES	see pag. 70
NOTES	other RAL on request, 24V version on request


PLG



Phantom Plus




POWER SUPPLY	max 6W - max 500mA
CODE	PHP01 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90
OPTICS	M W 30° 50°
FINISHES	W - White G - Grey B - Black
LUMEN OUTPUT SOURCE	860lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	400lm (3000 K CRI90, 500mA, 30°)
LED NUMBER	1 power LED
MATERIAL	body in anodized aluminium, flange in painted aluminium
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
ACCESSORIES	see pag. 70
NOTES	other RAL on request, 24V version on request

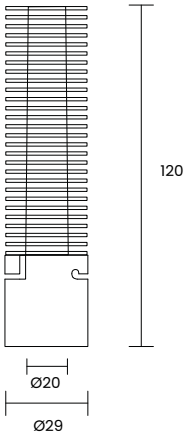

POWER SUPPLY	max 8W - max 700mA
CODE	PHP02 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90
OPTICS	M W 30° 50°
FINISHES	W - White G - Grey B - Black
LUMEN OUTPUT SOURCE	1200lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	530lm (3000 K CRI90, 700mA, 30°)
LED NUMBER	1 power LED
MATERIAL	body in anodized aluminium, flange in painted aluminium
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
ACCESSORIES	see pag. 70
NOTES	other RAL on request, 24V version on request


Raze



       	
POWER SUPPLY	max 1W - max 350mA
CODE	RZ001   
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	  
FINISHES	W - White G - Grey B - Black
LUMEN OUTPUT SOURCE	130lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	110lm (3000 K CRI90, 350mA, 50°)
LED NUMBER	1 power LED
MATERIAL	body in anodized aluminium, flange in painted aluminium
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
ACCESSORIES	see pag. 70
NOTES	other RAL on request, 24V version on request

PLG


Raze 3




       	
POWER SUPPLY	max 3W - max 700mA
CODE	RZ301   
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	   
FINISHES	W - White G - Grey B - Black
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	215lm (3000 K CRI90, 700mA, 40°)
LED NUMBER	1 power LED
MATERIAL	body in anodized aluminium, flange in painted aluminium
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
ACCESSORIES	see pag. 70
NOTES	other RAL on request, 24V version on request

PLG


Raze 6




       	
POWER SUPPLY	max 6W - max 500mA
CODE	RZ601   
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	  
FINISHES	W - White G - Grey B - Black
LUMEN OUTPUT SOURCE	540lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	420lm (3000 K CRI90, 500mA, 35°)
LED NUMBER	3 power LEDs
MATERIAL	body in anodized aluminium, flange in painted aluminium
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
ACCESSORIES	see pag. 73
NOTES	other RAL on request, 24V version on request

PLG


Raze C6



       	
POWER SUPPLY	max 6W - max 700mA
CODE	RZC06   
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	   
FINISHES	W - White G - Grey B - Black
LUMEN OUTPUT SOURCE	800lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	670lm (3000 K CRI90, 700mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	body in anodized aluminium, flange in painted aluminium
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 1,5 mt SUB4 FROST-UV 2 x 0,5 cable
ACCESSORIES	see pag. 73
NOTES	other RAL on request, 24V Version on request

PLG


Raze C9



       	
POWER SUPPLY	max 9W - max 500mA
CODE	RZC09   
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	   
FINISHES	W - White G - Grey B - Black
LUMEN OUTPUT SOURCE	1260lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	1066lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	body in anodized aluminium, flange in painted aluminium
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 1,5 mt SUB4 FROST-UV 2 x 0,5 cable
ACCESSORIES	see pag. 73
NOTES	other RAL on request, 24V version on request

PLG


Raze C12

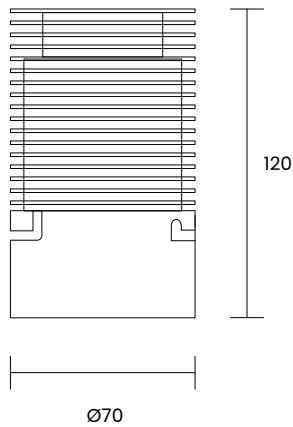


       	
POWER SUPPLY	max 12W - max 350mA
CODE	RZC12   
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	   
FINISHES	W - White G - Grey B - Black
LUMEN OUTPUT SOURCE	1730lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	1290lm (3000 K CRI90, 350mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	body in anodized aluminium, flange in painted aluminium
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 1,5 mt SUB4 FROST-UV 2 x 0,5 cable
ACCESSORIES	see pag. 73
NOTES	other RAL on request, 24V version on request

PLG


Trimless Recessed
Installation Accessories

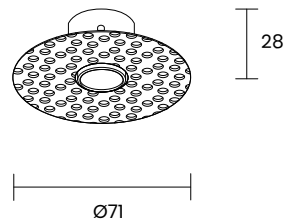

Code : **CRZ19**
Plasterboard flange for
PHANTOM, PHANTOM PLUS
W - White
G - Grey
B - Black

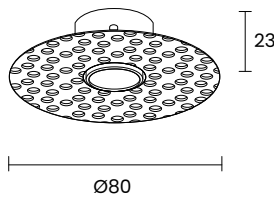


Code : **CRZ01**
Plasterboard flange for
RAZE
W - White
G - Grey
B - Black

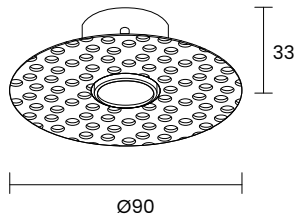


Code : **CRZ02**
Plasterboard flange for
RAZE 3
W - White
G - Grey
B - Black

⚠ To be ordered at the same time as the lighting device

Trimless Recessed
Installation Accessories

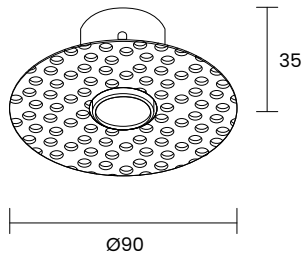


Code : **CRZ03**
Plasterboard flange for
RAZE 6
W - White
G - Grey
B - Black

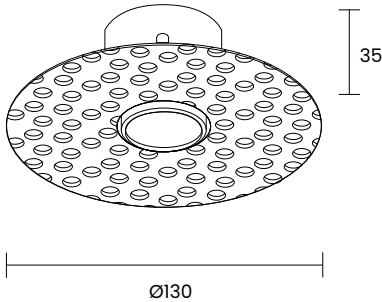


Code : **CRZ07**
Plasterboard flange for
RAZE C9
W - White
G - Grey
B - Black

⚠ To be ordered at the same time as the lighting device

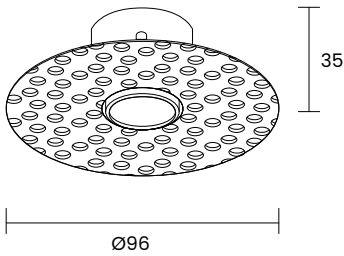

Code : **CRZ06**
Plasterboard flange for
RAZE C6
W - White
G - Grey
B - Black

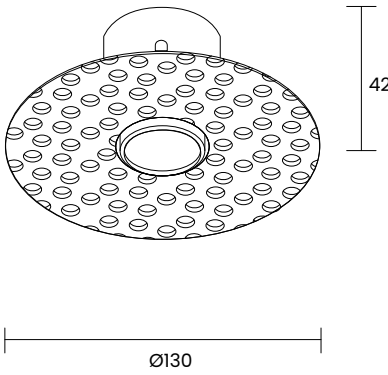


Code : **CRZ08**
Plasterboard flange for
RAZE C12
W - White
G - Grey
B - Black



Adjustable Recessed

Mini Foxy r




Ø38mm CE III 130gr IP40 150lm 100% A A+ A++

POWER SUPPLY	max 2W - max 500mA
CODE	MFR01 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X 15° 25° 40° 60°
FINISHES	W - White G - Grey B - Black
LUMEN OUTPUT SOURCE	180lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	160lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED
MATERIAL	painted aluminium
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
ACCESSORIES	honeycomb - code : NID07
NOTES	other RAL on request, 24V version on request (different color options for base and swivel)

PLG




Foxy r



						
POWER SUPPLY				max 5W – max 500mA		
CODE				FRT01   		
LED COLOUR				J – Warm white 2700 K – CRI90 H – Warm white 3000 K – CRI90 N – Natural white 4000 K		
OPTICS				   20° 30° 45°		
FINISHES				W – White G – Grey B – Black		
LUMEN OUTPUT SOURCE				570lm (3000 K CRI90, 500mA)		
DELIVERED LUMEN OUTPUT				510lm (3000 K CRI90, 500mA, 45°)		
LED NUMBER				1 power LED multichip		
MATERIAL				painted aluminium		
DRIVER				not included, see pag. 348 and 350		
POWER CABLE				includes 0,5 mt FEP 2 x 0,35 cable		
ACCESSORIES				honeycomb – code : NID08		
NOTES				other RAL on request, 24V version on request (different color options for base and swivel)		

PLG

Foxy r 10

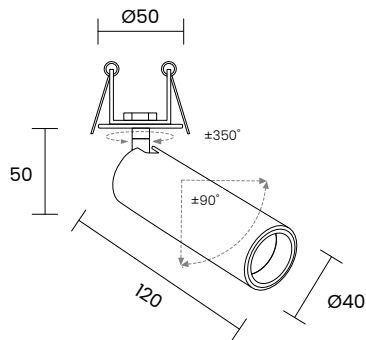

Ø 40mm CE III IP40 320gr A A+ A++	
POWER SUPPLY	max 9W - max 500mA
CODE	FR101
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N 20° M 30° W 40° X 60°
FINISHES	W - White G - Grey B - Black
LUMEN OUTPUT SOURCE	1200lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	1010lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	painted aluminium
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
ACCESSORIES	honeycomb - code : NID01
NOTES	other RAL on request, 24V version on request (different color options for base and swivel)

PLG


Punto r 3



Ø 38mm CE III IP40 180gr A A+ A++	
POWER SUPPLY	max 3W - max 700mA
CODE	PNTR3
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N 15° M 25° W 40° X 60°
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	215lm (3000 K CRI90, 700mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	painted aluminium
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
ACCESSORIES	honeycomb - code : NID07
NOTES	other RAL on request, 24V version on request (different color options for base and swivel)

PLG

Punto r 6

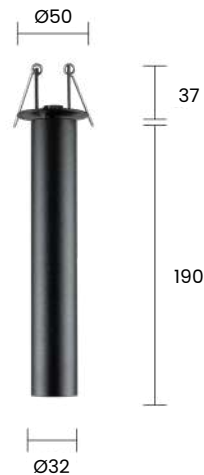

       	
POWER SUPPLY	max 6W - max 700mA
CODE	PNTR6   
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	  
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	800lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	710lm (3000 K CRI90, 700mA, 45°)
LED NUMBER	1 power LED multichip
MATERIAL	painted aluminium
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
ACCESSORIES	honeycomb - code : NID08
NOTES	other RAL on request, 24V version on request (different color options for base and swivel)

PLG

Punto r 10





       	
POWER SUPPLY	max 9W - max 500mA
CODE	PNTR10   
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	   
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	1200lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	1010lm (3000 K CRI90, 500mA, 36°)
LED NUMBER	1 power LED multichip
MATERIAL	painted aluminium
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
ACCESSORIES	honeycomb - code : NID01
NOTES	other RAL on request, 24V version on request (different color options for base and swivel)

PLG



Wall Recessed

Sottile 3

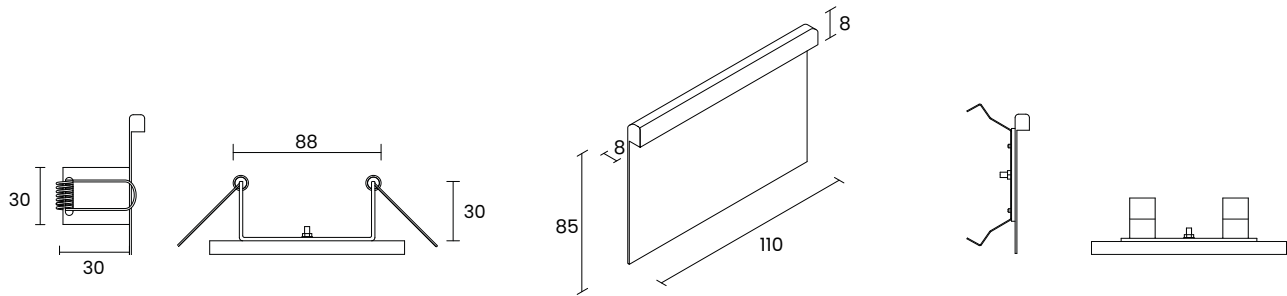



POWER SUPPLY	max 1,5W - 24V
CODE	SOT03 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Diff.
FINISHES	W - White G - Grey B - Black K - Corten
LUMEN OUTPUT SOURCE	150lm (3000 K CRI90)
DELIVERED LUMEN OUTPUT	150lm (3000 K CRI90)
LED NUMBER	Strip led
MATERIAL	Body in painted Inox AISI 316L
DRIVER	not included, see pag. 351
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
ACCESSORIES	
NOTES	other RAL on request



POWER SUPPLY	max 1,5W - 24V
CODE	SOTB3 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Diff.
FINISHES	W - White G - Grey B - Black K - Corten
LUMEN OUTPUT SOURCE	150lm (3000 K CRI90)
DELIVERED LUMEN OUTPUT	150lm (3000 K CRI90)
LED NUMBER	Strip led
MATERIAL	Body in painted Inox AISI 316L
DRIVER	not included, see pag. 351
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
ACCESSORIES	503 flush-mounting box included
NOTES	other RAL on request



Sottile 6

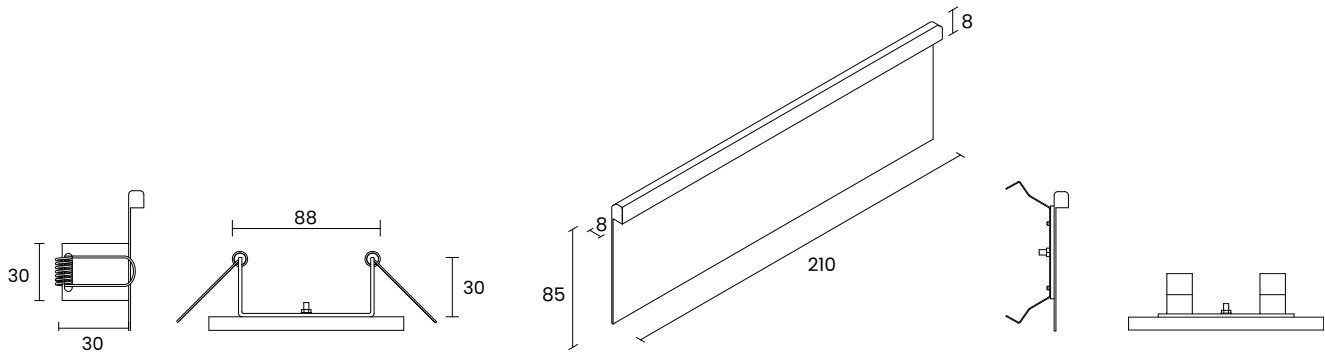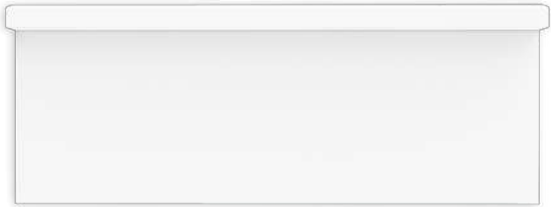

POWER SUPPLY	max 3W - 24V
CODE	SOT06 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Diff.
FINISHES	W - White G - Grey B - Black K - Corten
LUMEN OUTPUT SOURCE	300lm (3000 K CRI90)
DELIVERED LUMEN OUTPUT	300lm (3000 K CRI90)
LED NUMBER	Strip led
MATERIAL	Body in painted Inox AISI 316L
DRIVER	not included, see pag. 351
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
ACCESSORIES	
NOTES	other RAL on request



POWER SUPPLY	max 3W - 24V
CODE	SOTB6 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Diff.
FINISHES	W - White G - Grey B - Black K - Corten
LUMEN OUTPUT SOURCE	300lm (3000 K CRI90)
DELIVERED LUMEN OUTPUT	300lm (3000 K CRI90)
LED NUMBER	Strip led
MATERIAL	Body in painted Inox AISI 316L
DRIVER	not included, see pag. 351
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
ACCESSORIES	506 flush-mounting box included
NOTES	other RAL on request



Ceiling and Wall Surface

Mini Foxy



1 - Applique




2 - Springs



3 - Ring Nut






4 - Magnetic

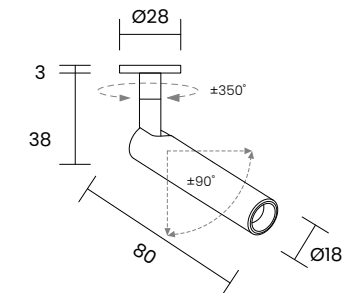

CEIII75grIP40	
POWER SUPPLYmax 2W - max 500mA	
CODEMFX01	
LED COLOURJ - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K	
OPTICS N15° M25° W40° X60°	
FINISHES W - White G - Grey B - Black	
FIXING OPTIONS 1 - Applique 2 - Springs 3 - Ring Nut 4 - Magnetic	
LUMEN OUTPUT SOURCE180lm (3000 K CRI90, 500mA)	
DELIVERED LUMEN OUTPUT160lm (3000 K CRI90, 500mA, 40°)	
LED NUMBER1 power LED	
MATERIALpainted aluminium	
DRIVERnot included, see pag. 348 and 350	
POWER CABLEincludes 0,5 mt FEP 2 x 0,35 cable	
ACCESSORIEShoneycomb - code : NID07	
NOTESother RAL on request, 24V version on request (different color options for base and swivel)	

PLG


Foxy



POWER SUPPLY	max 5W - max 500mA
CODE	FOX01 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W 20° 30° 45°
FINISHES	W - White G - Grey B - Black
FIXING OPTIONS	1 - Applique 2 - Springs 3 - Ring Nut 4 - Magnetic 5 - Applique
LUMEN OUTPUT SOURCE	570lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	510lm (3000 K CRI90, 500mA, 45°)
LED NUMBER	1 power LED multichip
MATERIAL	painted aluminium
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
ACCESSORIES	honeycomb - code : NID08
NOTES	other RAL on request, 24V version on request (different color options for base and swivel)

PLG


Foxy 10



POWER SUPPLY	max 9W - max 500mA
CODE	FX101 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X 20° 30° 40° 60°
FINISHES	W - White G - Grey B - Black
LUMEN OUTPUT SOURCE	1200lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	1010lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	painted aluminium
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
ACCESSORIES	honeycomb - code : NID01
NOTES	other RAL on request, 24V version on request (different color options for base and swivel)

PLG

Sirio a




POWER SUPPLY	max 3W - max 700mA
CODE	SRA01 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	S 3°
FINISHES	W - White G - Grey B - Black K - Corten
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	170lm (3000 K CRI90, 700mA, 3°)
LED NUMBER	1 power LED
MATERIAL	painted aluminium
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
NOTES	other RAL on request, 24V version on request




POWER SUPPLY	max 6W - max 700mA
CODE	SRA02 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N 20° M 30° W 40° X 50°
FINISHES	W - White G - Grey B - Black K - Corten
LUMEN OUTPUT SOURCE	800lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	430lm (3000 K CRI90, 700mA , 30°)
LED NUMBER	1 power LED multichip
MATERIAL	painted aluminium
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
NOTES	other RAL on request, 24V version on request

Punto 3



POWER SUPPLY	max 3W - max 700mA
CODE	PNT03 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N 15° M 25° W 40° X 60°
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	215lm (3000 K CRI90, 700mA, 40°)
LED NUMBER	1 power LED
MATERIAL	painted aluminium
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
ACCESSORIES	honeycomb - code : NID07
NOTES	other RAL on request, 24V version on request (different color options for base and swivel)

Punto 6

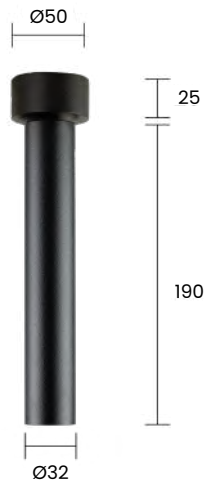

CEIII300grIP40A+ A+ A+	
POWER SUPPLY	max 6W - max 700mA
CODE	PNT06
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W 20°30°45°
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	800lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	710lm (3000 K CRI90, 700mA, 45°)
LED NUMBER	1 power LED multichip
MATERIAL	painted aluminium
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
ACCESSORIES	honeycomb - code : NID08
NOTES	other RAL on request, 24V version on request (different color options for base and swivel)


PLG

Punto 10





CEIII470grIP40A+ A+ A+	
POWER SUPPLY	max 9W - max 500mA
CODE	PNT10
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X 20°30°40°60°
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	1200lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	1010lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	painted aluminium
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
ACCESSORIES	honeycomb - code : NID01
NOTES	other RAL on request, 24V version on request (different color options for base and swivel)

PLG

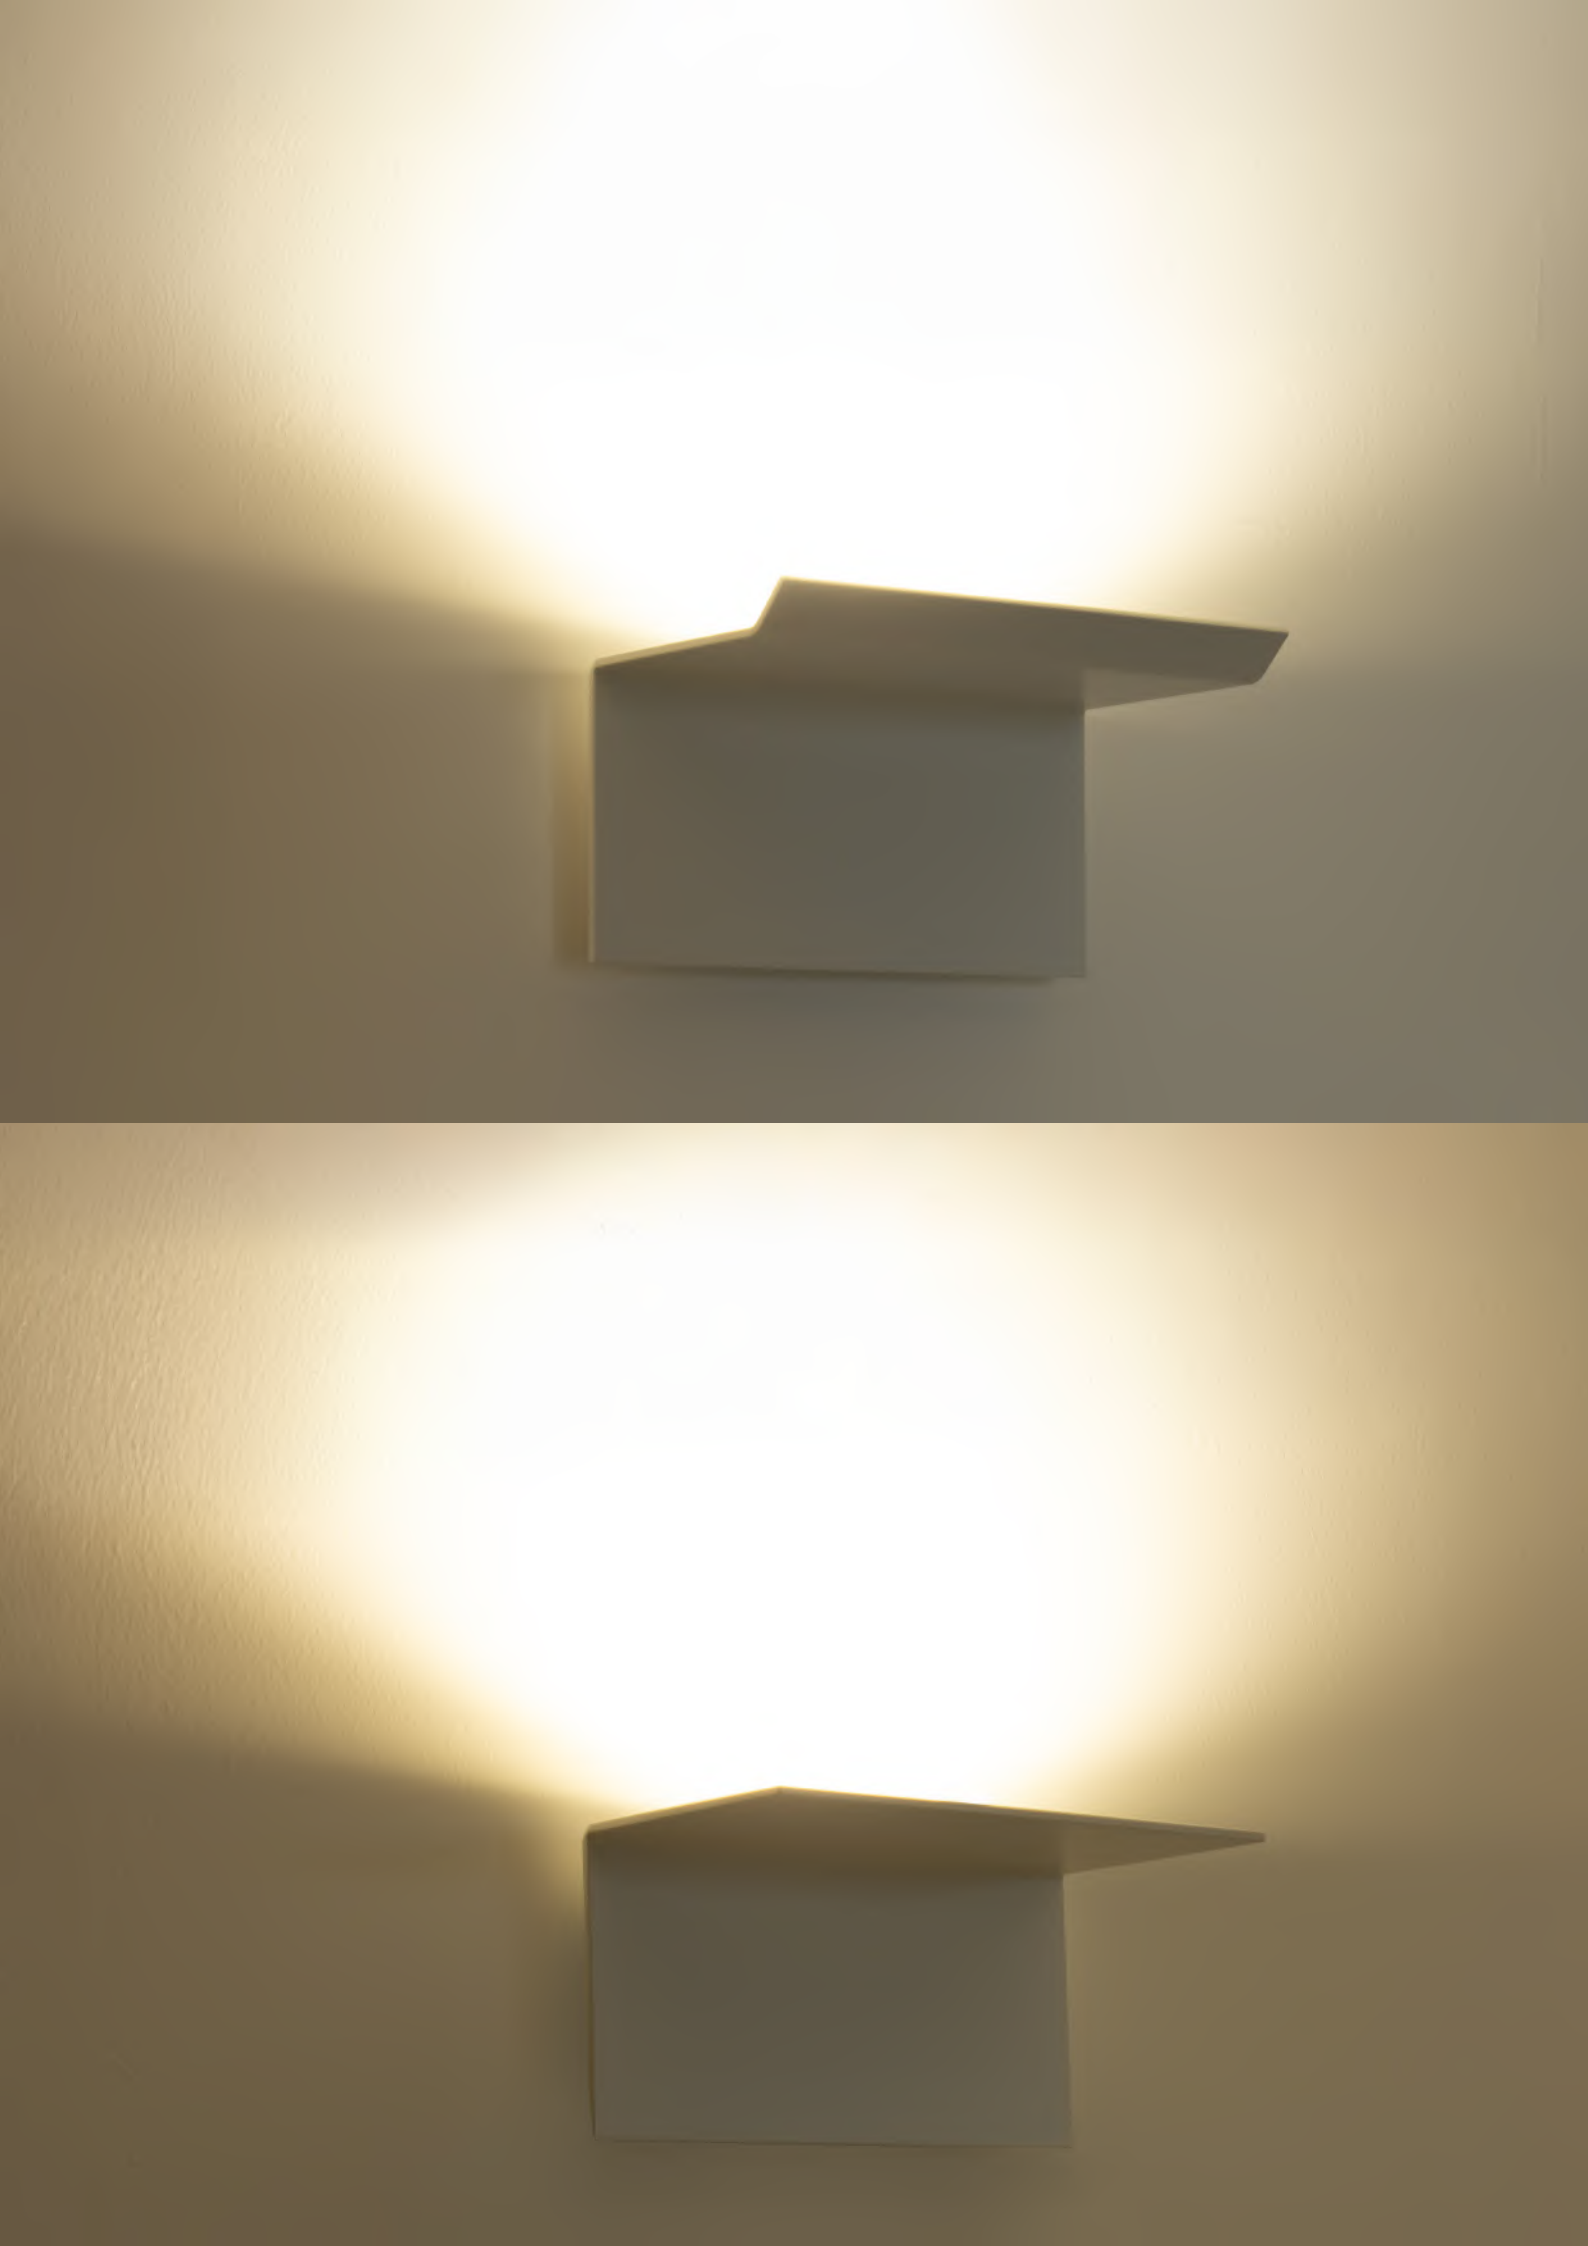


Flat A

Flat

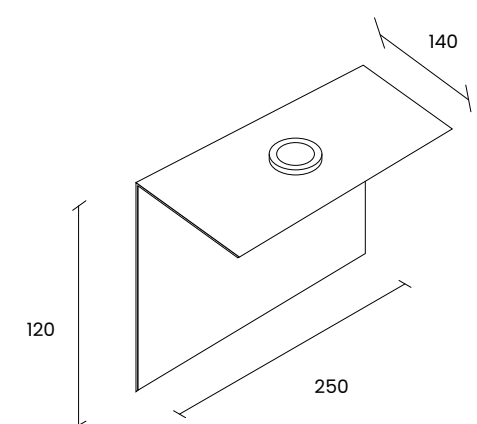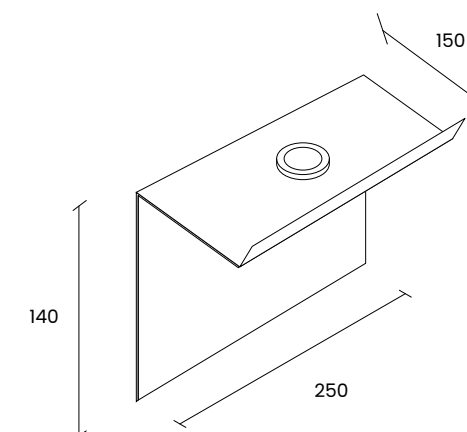



POWER SUPPLY	max 18W - 220V/240V
CODE	FLT02 
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Diff.
FINISHES	W - White G - Grey B - Black
LUMEN OUTPUT SOURCE	2405 lm (3000 K CRI90)
LED NUMBER	1 Power LED multichip
MATERIAL	Painted aluminium
DRIVER	included
NOTES	other RAL on request



POWER SUPPLY	max 18W - 220V/240V
CODE	FLT01 
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Diff.
FINISHES	W - White G - Grey B - Black
LUMEN OUTPUT SOURCE	2405 lm (3000 K CRI90)
LED NUMBER	1 Power LED multichip
MATERIAL	Painted aluminium
DRIVER	included
NOTES	other RAL on request

Track Lights


Joy b

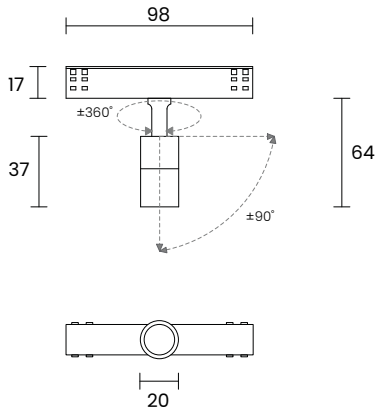

POWER SUPPLY	max 2W - 24V
CODE	JYB01 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X 15° 25° 40° 60°
FINISHES	G - Grey B - Black
LUMEN OUTPUT SOURCE	180lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	165lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED
MATERIAL	anodized aluminium
DRIVER	Not included
NOTES	

PLG

Joy Zoom b

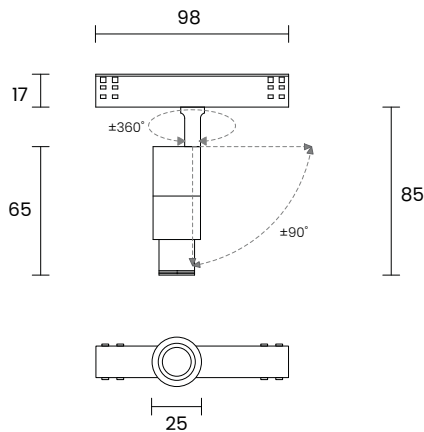



Joy Zoom optic is focusable from 8° to 45°



POWER SUPPLY	max 4W - 24V
CODE	JZB01 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	z - 8° > 45°
FINISHES	B - Black
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	185lm (3000 K CRI90, 500mA)
LED NUMBER	1 power LED
MATERIAL	anodized aluminium
DRIVER	Not included
NOTES	

PLG


Mini Foxy b

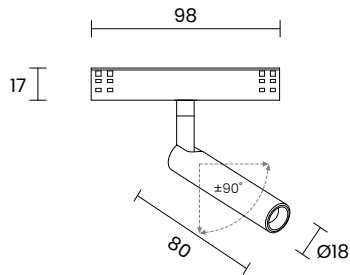

POWER SUPPLY	max 2W - 24V
CODE	MFB01 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X 15° 25° 40° 60°
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	180lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	160lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED
MATERIAL	Painted aluminium
DRIVER	Not included
ACCESSORIES	honeycomb - code : NID07
NOTES	other RAL on request

PLG


Foxy b



CE III  IP40   	
POWER SUPPLY	max 5W - 24V
CODE	FXB01   
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	   20° 30° 45°
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	570lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	510lm (3000 K CRI90, 500mA, 45°)
LED NUMBER	1 power LED multichip
MATERIAL	Painted aluminium
DRIVER	Not included
ACCESSORIES	honeycomb - code : NID08
NOTES	other RAL on request

PLG

Foxy 10 b

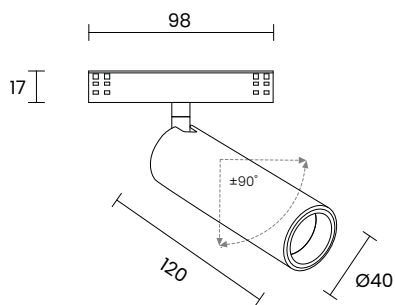

CE III  IP40   	
POWER SUPPLY	max 9W - 24V
CODE	F10B1   
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	    20° 30° 40° 60°
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	1200lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	1010lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	Painted aluminium
DRIVER	Not included
ACCESSORIES	honeycomb - code : NID01
NOTES	other RAL on request

PLG



WHITE



GREY



BEIGE PEARL



GREY PEARL



GOLD MOERO



GOLD MOERO

Punto 3 b




CE III 130gr IP40 130gr A A+ A++

POWER SUPPLY	max 3W - 24V
CODE	PNTB3 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X 15° 25° 40° 60°
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	215lm (3000 K CRI90, 700mA, 40°)
LED NUMBER	1 power LED
MATERIAL	Painted aluminium
DRIVER	Not included
ACCESSORIES	honeycomb - code : NID07
NOTES	other RAL on request

PLG


Punto 6 b

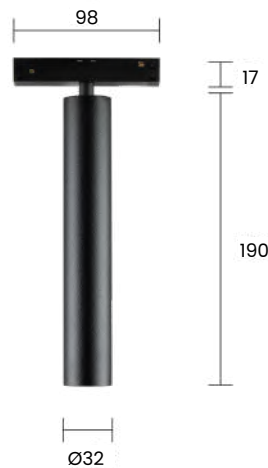

CE III IP40 250gr	
POWER SUPPLY	max 6W - 24V
CODE	PNTB6 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W 20° 30° 45°
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	800lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	710lm (3000 K CRI90, 700mA, 45°)
LED NUMBER	1 power LED multichip
MATERIAL	Painted aluminium
DRIVER	Not included
ACCESSORIES	honeycomb - code : NID08
NOTES	other RAL on request

PLG

Punto 10 b

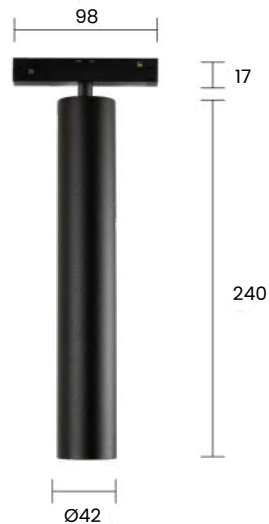

CE III IP40 420gr	
POWER SUPPLY	max 9W - 24V
CODE	PNTB10 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X 20° 30° 40° 60°
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	1200lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	1010lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	Painted aluminium
DRIVER	Not included
ACCESSORIES	honeycomb - code : NID01
NOTES	other RAL on request

PLG


Punto 3 b Suspended



CEIII130grIP40	
POWER SUPPLY	max 3W - 24V
CODE	PBS03 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X 15°25°40°60°
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	215lm (3000 K CRI90, 700mA, 40°)
LED NUMBER	1 power LED
MATERIAL	Painted aluminium
DRIVER	Not included
ACCESSORIES	honeycomb - code : NID07
NOTES	other RAL on request

PLG

Punto 6 b Suspended

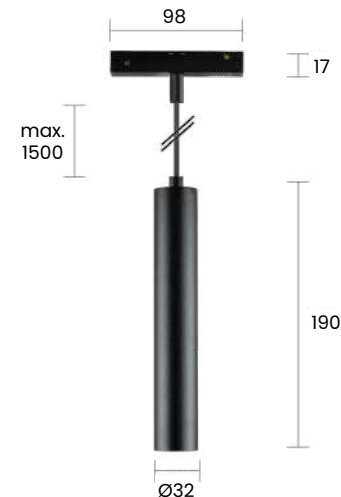

CEIII250grIP40	
POWER SUPPLY	max 6W - 24V
CODE	PBS06 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W 20°30°45°
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	800lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	710lm (3000 K CRI90, 700mA, 45°)
LED NUMBER	1 power LED multichip
MATERIAL	Painted aluminium
DRIVER	Not included
ACCESSORIES	honeycomb - code : NID08
NOTES	other RAL on request

PLG


Punto 10 b Suspended



CEIII420grIP40A+ A+ A+	
POWER SUPPLY	max 9W - 24V
CODE	PBS10
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N 20° M 30° W 40° X 60°
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	1200lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	1010lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	Painted aluminium
DRIVER	Not included
ACCESSORIES	honeycomb - code : NID01
NOTES	other RAL on request

PLG


Candela 3 b

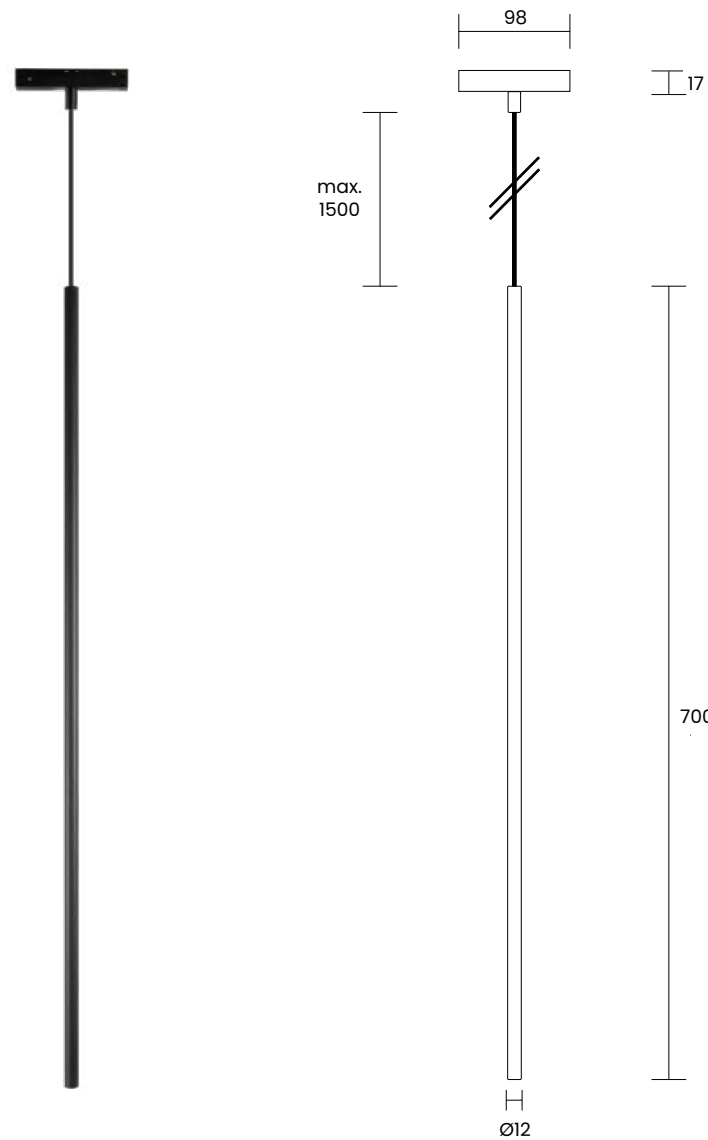

CEIII230grIP40A+ A+ A+	
POWER SUPPLY	max 3W - 24V
CODE	CNB03
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N 20° M 35° W 50°
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	215lm (3000 K CRI90, 700mA, 50°)
LED NUMBER	1 power LED
MATERIAL	Painted aluminium
DRIVER	Not included
NOTES	other RAL on request

PLG


Candela 6 b

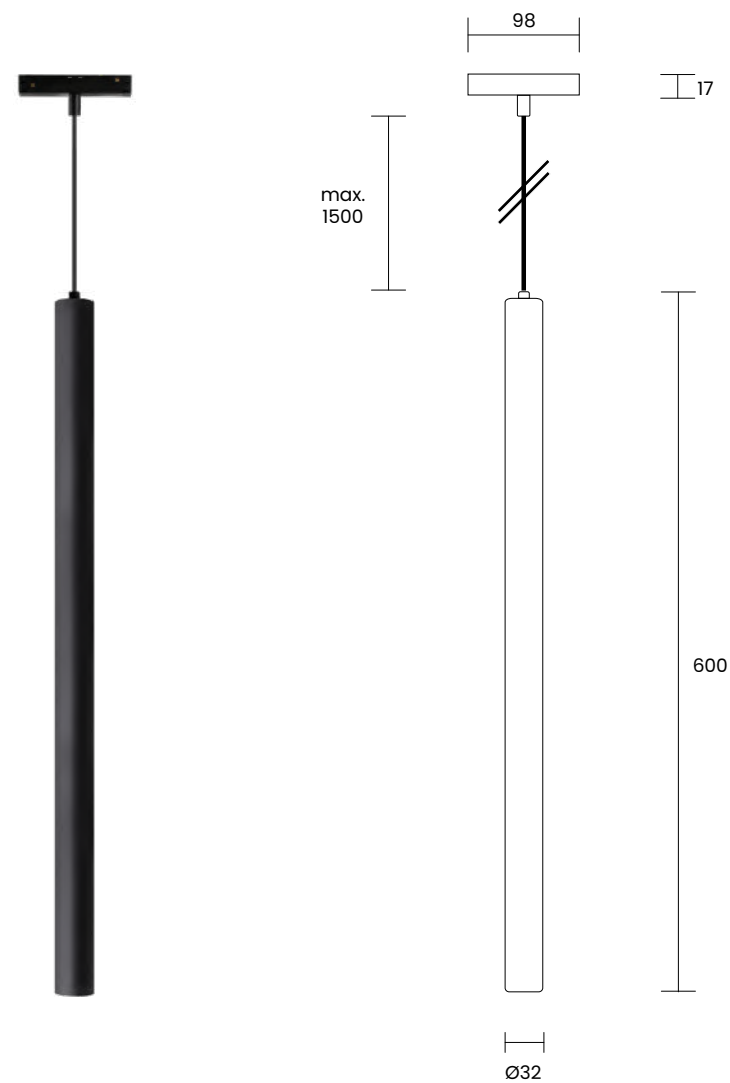

CE III 400gr IP40 A A+ A++	
POWER SUPPLY	max 6W - 24V
CODE	CNB06
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W 20° 30° 45°
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	800lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	710lm (3000 K CRI90, 700mA, 45°)
LED NUMBER	1 power LED multichip
MATERIAL	Painted aluminium
DRIVER	Not included
ACCESSORIES	honeycomb - code : NID08
NOTES	other RAL on request

PLG

Candela 10 b

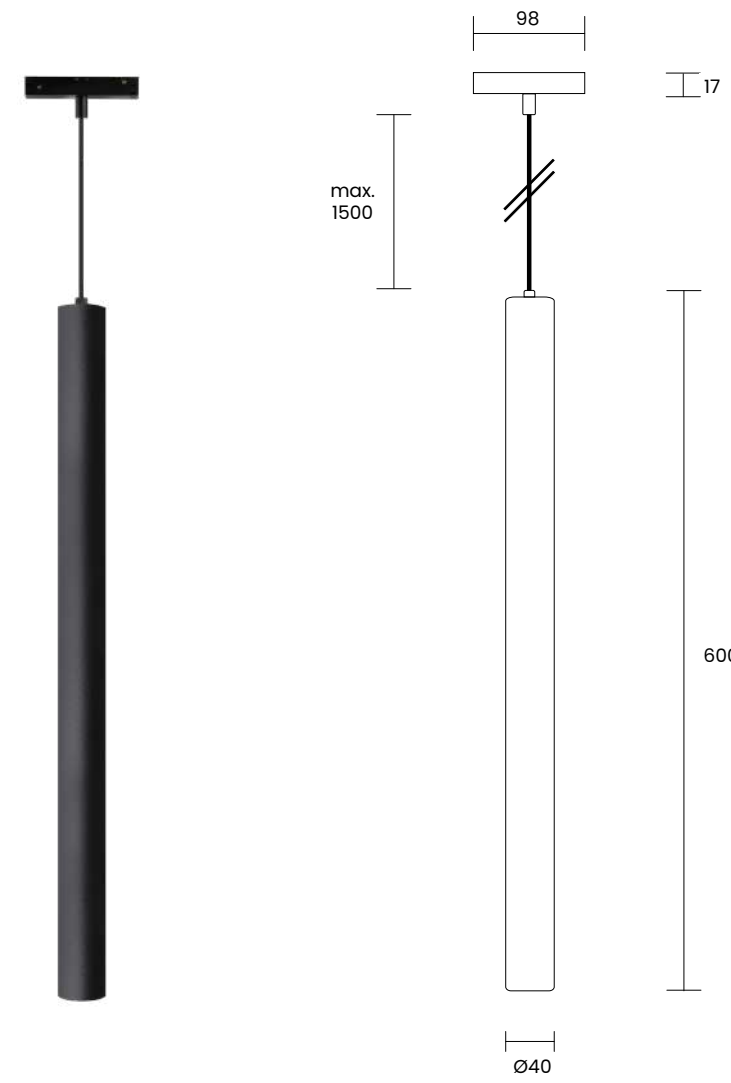


CE III 580gr IP40 A A+ A++	
POWER SUPPLY	max 9W - 24V
CODE	CNB10
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X 20° 30° 40° 60°
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	1200lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	1010lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	Painted aluminium
DRIVER	Not included
ACCESSORIES	honeycomb - code : NID01
NOTES	other RAL on request

PLG



Suspended

Punto 3 Suspended

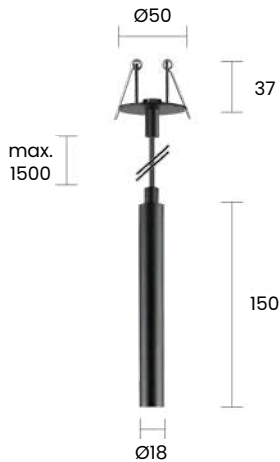

Ø 38mm



180gr

IP40

POWER SUPPLY	max 3W - max 700mA
CODE	PNTS3
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	215lm (3000 K CRI90, 700mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	painted aluminium
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
ACCESSORIES	honeycomb - code : NID07
NOTES	other RAL on request, 24V version on request (different color options for base and swivel)

PLG



Punto 6 Suspended

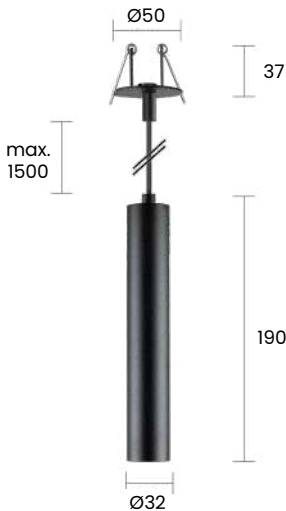

POWER SUPPLY	max 6W - max 700mA
CODE	PNTS6 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W 20° 30° 45°
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	800lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	710lm (3000 K CRI90, 700mA, 45°)
LED NUMBER	1 power LED multichip
MATERIAL	painted aluminium
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
ACCESSORIES	honeycomb - code : NID08
NOTES	other RAL on request, 24V version on request (different color options for base and swivel)

PLG

Punto 10 Suspended

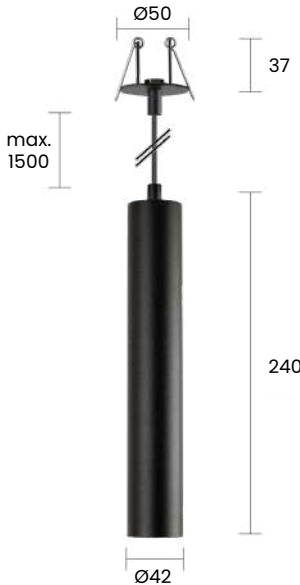


POWER SUPPLY	max 9W - max 500mA
CODE	PNTS10 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X 20° 30° 40° 60°
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	1200lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	1010lm (3000 K CRI90, 500mA, 36°)
LED NUMBER	1 power LED multichip
MATERIAL	painted aluminium
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
ACCESSORIES	honeycomb - code : NID01
NOTES	other RAL on request, 24V version on request (different color options for base and swivel)

PLG

115


Punto 3 220V

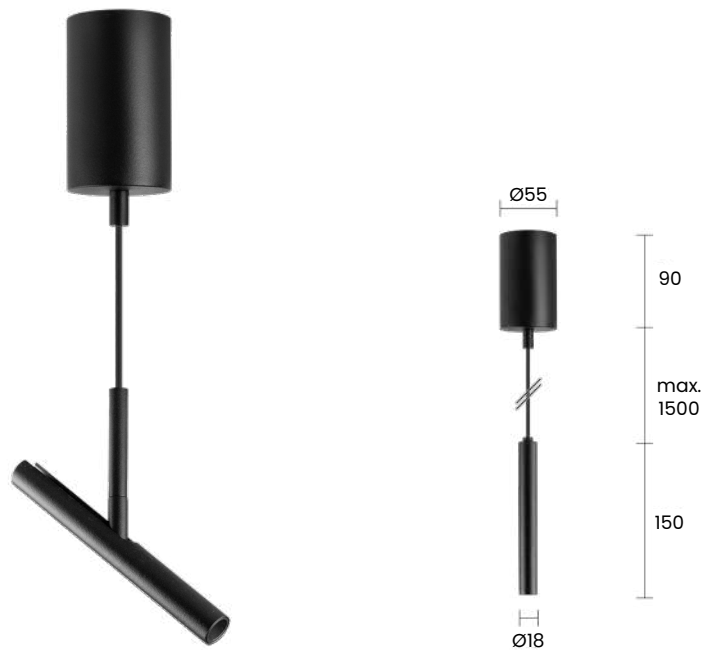

CE	
POWER SUPPLY	max 3W - 220V / 240V
CODE	PNTD3
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	15° 25° 40° 60°
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	215lm (3000 K CRI90, 700mA, 40°)
LED NUMBER	1 power LED
MATERIAL	Painted aluminium
DRIVER	included
ACCESSORIES	honeycomb - code : NID07
NOTES	other RAL on request (different color options for base and swivel)

PLG


Punto 6 220V

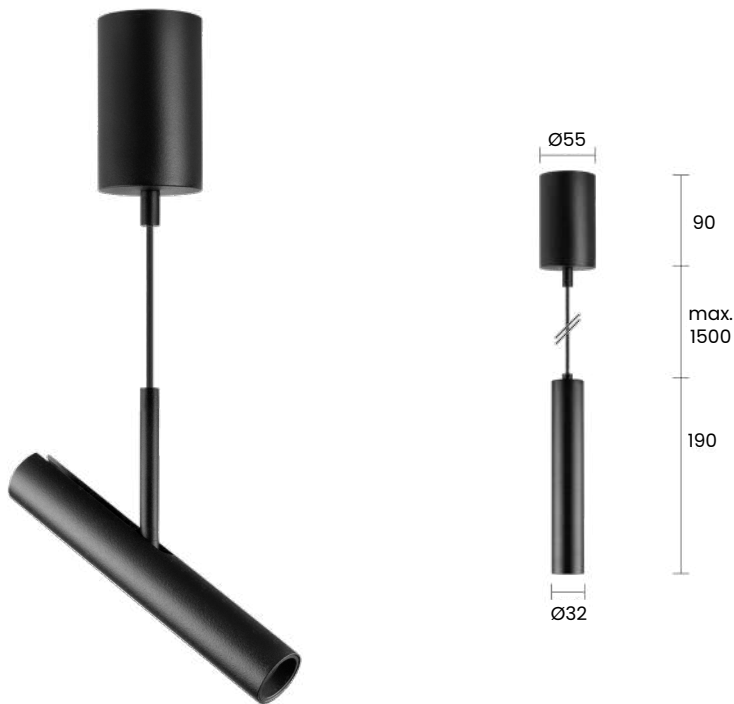

CE	
POWER SUPPLY	max 6W - 220V / 240V
CODE	PNTD6
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	20° 30° 45°
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	800lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	710lm (3000 K CRI90, 700mA, 45°)
LED NUMBER	1 power LED multichip
MATERIAL	Painted aluminium
DRIVER	included
ACCESSORIES	honeycomb - code : NID08
NOTES	other RAL on request (different color options for base and swivel)

PLG


Punto 10 220V

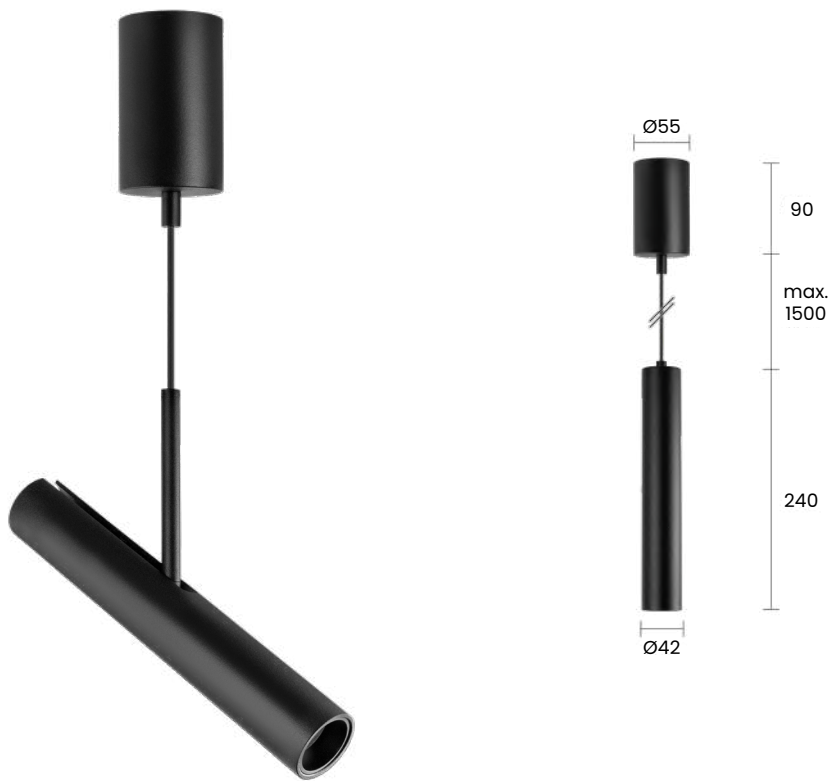

    	max 9W - 220V / 240V
POWER SUPPLY	
CODE	PNTD10   
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	   
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	1200lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	1010lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	Painted aluminium
DRIVER	included
ACCESSORIES	honeycomb - code : NID01
NOTES	other RAL on request (different color options for base and swivel)

PLG

Candela r 3

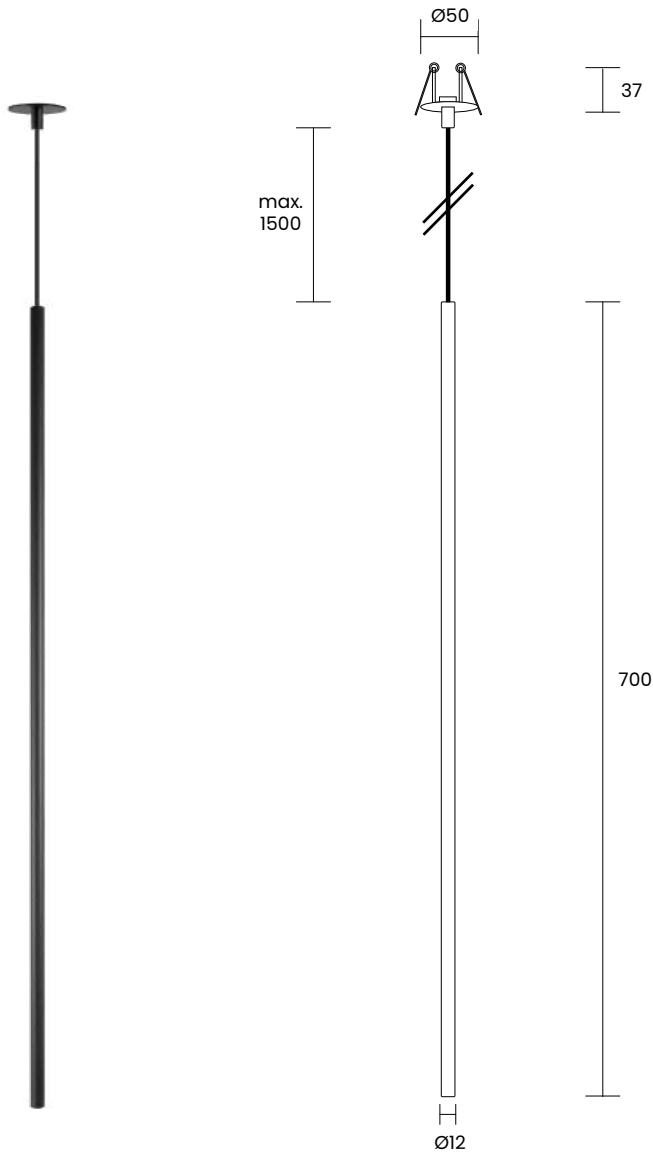


     	max 3W - max 700mA
POWER SUPPLY	
CODE	CNR03   
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	  
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	215lm (3000 K CRI90, 700mA, 50°)
LED NUMBER	1 power LED
MATERIAL	Painted aluminium
DRIVER	not included, see pag. 349 and 350
NOTES	other RAL on request

PLG

119


Candela r 6

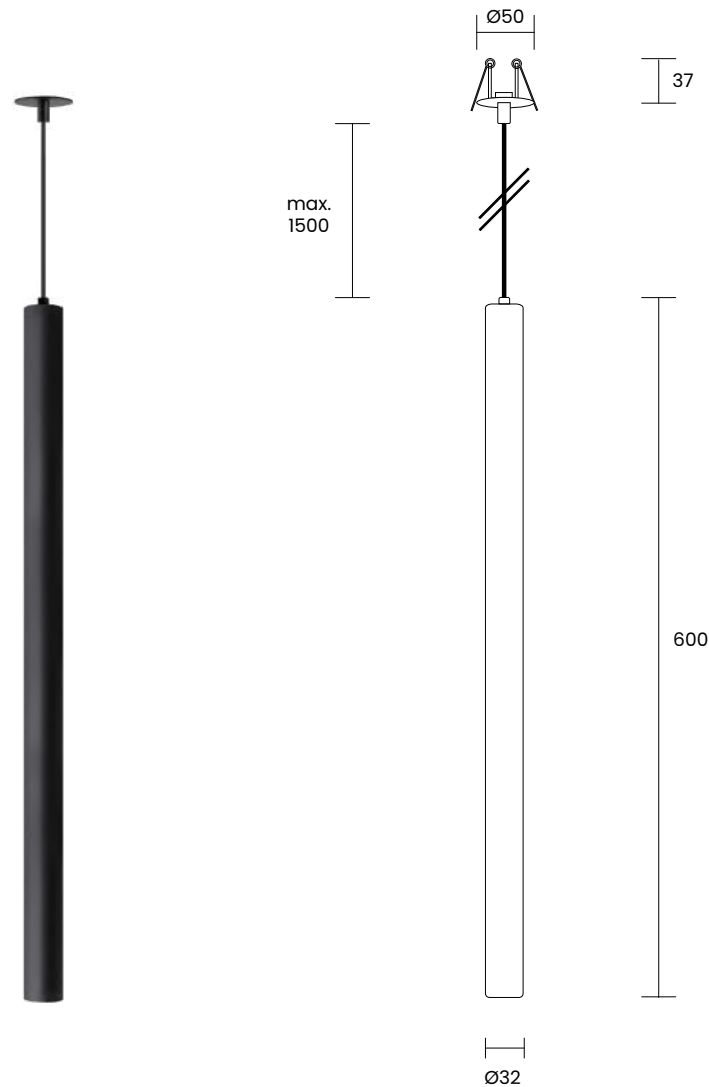

      	
POWER SUPPLY	max 6W - max 700mA
CODE	CNR06   
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	  
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	800lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	710lm (3000 K CRI90, 700mA, 45°)
LED NUMBER	1 power LED multichip
MATERIAL	Painted aluminium
DRIVER	not included, see pag. 349 and 350
ACCESSORIES	honeycomb - code : NID08
NOTES	other RAL on request

PLG


Candela r 10

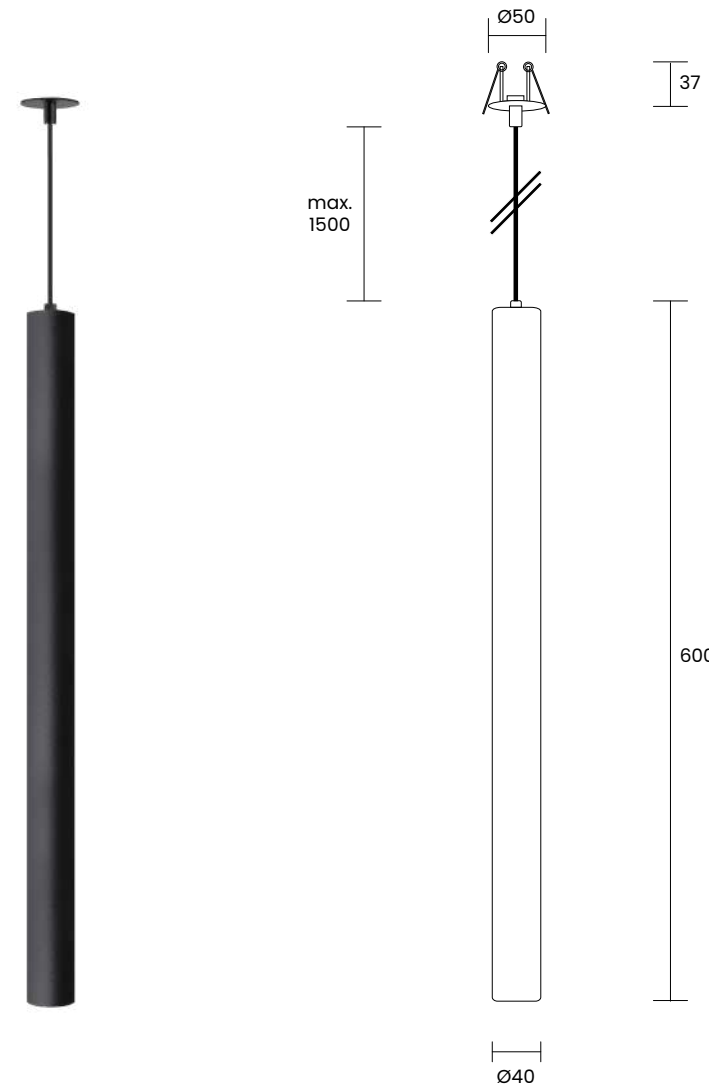

      	
POWER SUPPLY	max 9W - max 500mA
CODE	CNR10   
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	   
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	1200lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	1010lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	Painted aluminium
DRIVER	not included, see pag. 348 and 350
ACCESSORIES	honeycomb - code : NID01
NOTES	other RAL on request

PLG


Candela 3 220V

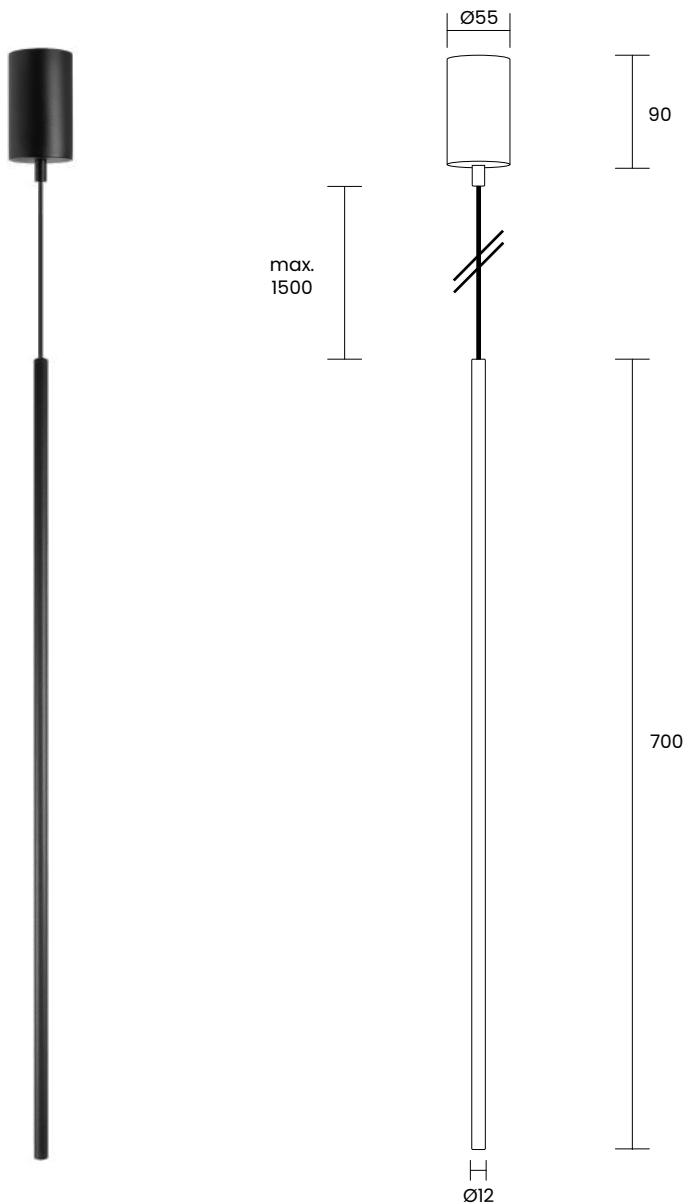

    	
POWER SUPPLY	max 3W - 220V/240V
CODE	CND03   
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	   20° 35° 50°
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	215lm (3000 K CRI90, 700mA, 50°)
LED NUMBER	1 power LED
MATERIAL	Painted aluminium
DRIVER	included
NOTES	other RAL on request

PLG


Candela 6 220V

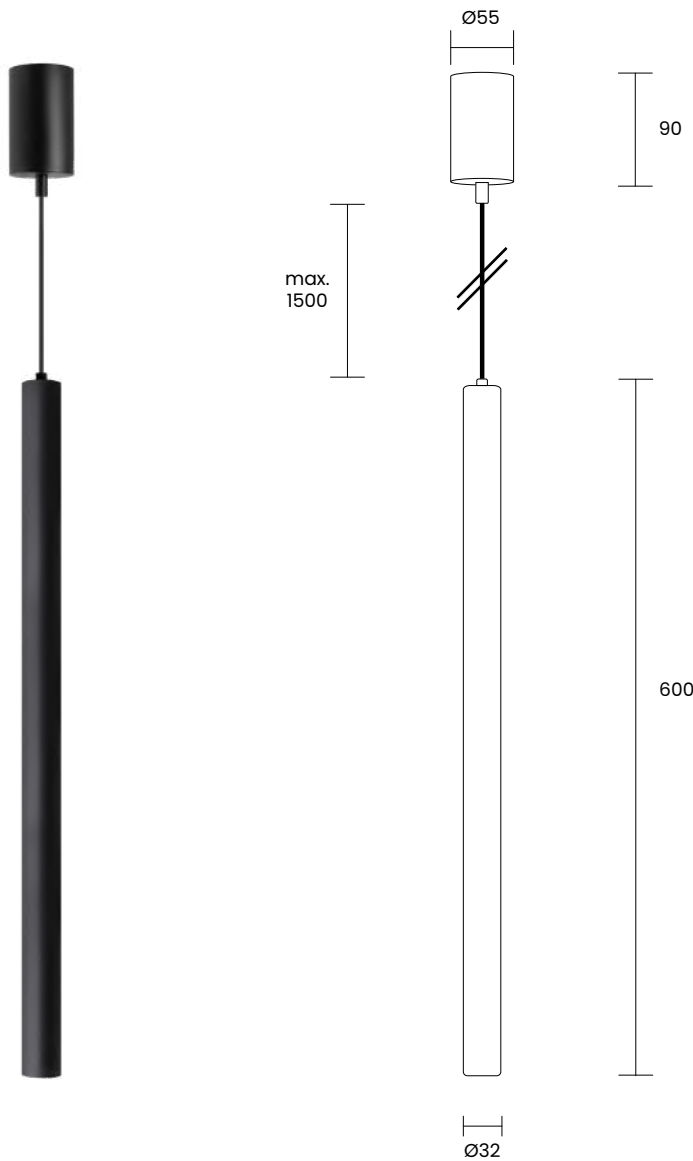


    	
POWER SUPPLY	max 6W - 220V/240V
CODE	CND06   
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	   20° 30° 45°
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	800lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	710lm (3000 K CRI90, 700mA, 45°)
LED NUMBER	1 power LED multichip
MATERIAL	Painted aluminium
DRIVER	included
ACCESSORIES	honeycomb - code : NID08
NOTES	other RAL on request

PLG


Candela 10 220V

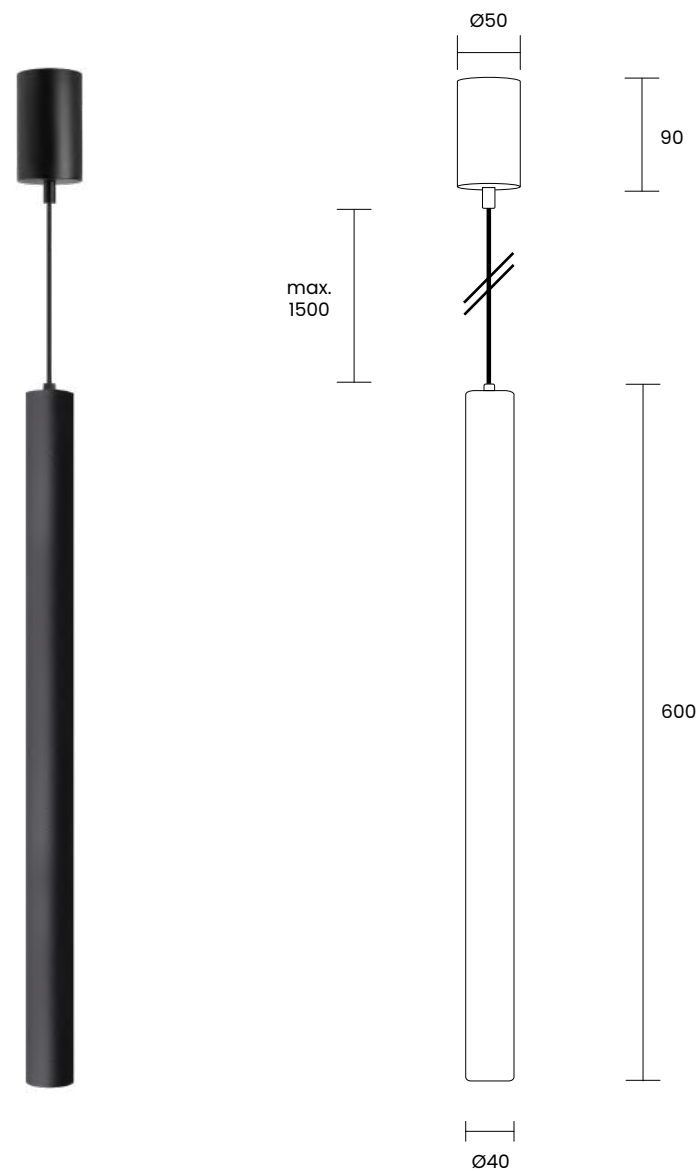


CE     	
POWER SUPPLY	max 9W - 220V/240V
CODE	CND10 
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	1200lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	1010lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	Painted aluminium
DRIVER	included
ACCESSORIES	honeycomb - code : NID01
NOTES	other RAL on request

PLG


Iris suspended

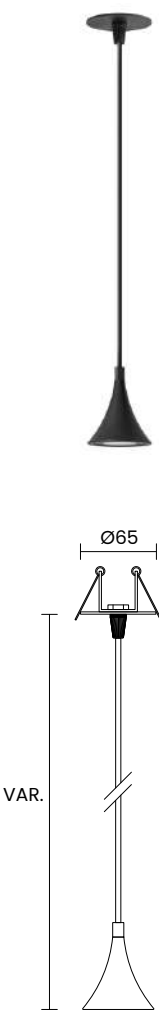

     	
POWER SUPPLY	max 5W - 500mA
CODE	IRS02 
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	570lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	420lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	head and base in painted aluminium
DRIVER	not included, see pag. 348 and 350
POWER CABLE	2 mt SUB4 FROST-UV 2x0,50 cable
NOTES	other RAL on request, 24V version on request

PLG

Iris ceiling

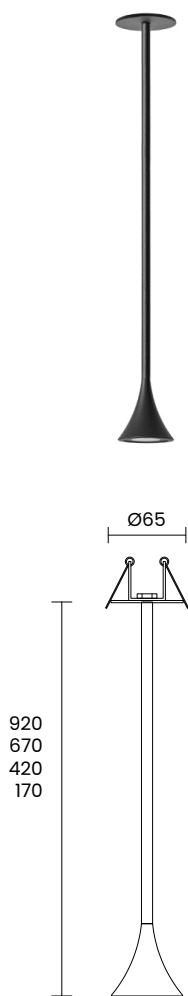


Ø 50mm CE III IP40 A+ A+ A+

POWER SUPPLY	max 5W - 500mA
CODE	IRC02 ■ ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X 20° 30° 40° 55°
FINISHES	W - White B - Black
STEM LENGTH	1 - 170mm 2 - 420mm 3 - 670mm 4 - 920mm
LUMEN OUTPUT SOURCE	570lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	420lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	head and base in painted aluminium, stem in painted brass
DRIVER	not included, see pag. 348 and 350
NOTES	other RAL on request, 24V version on request

PLG

Calla suspended

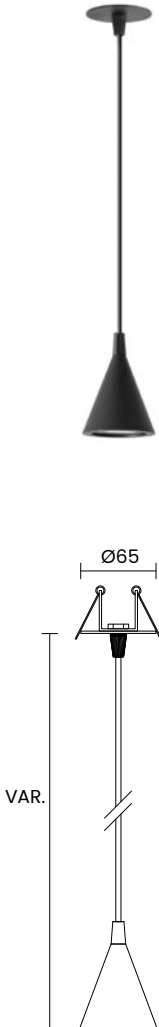

Ø 50mm CE III IP40 A+ A+ A+


POWER SUPPLY	max 9W - 250mA
CODE	CAS02 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X 20° 30° 40° 60°
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	1200lm (3000 K CRI90, 250mA)
DELIVERED LUMEN OUTPUT	1010lm (3000 K CRI90, 250mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	head and base in painted aluminium, stem in painted brass
DRIVER	not included, see pag. 346 and 350
POWER CABLE	2 mt SUB4 FROST-UV 2x0,50 cable
NOTES	other RAL on request, 24V version on request

PLG

127




Calla ceiling

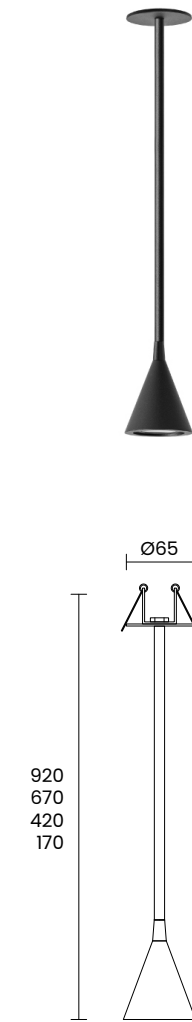

POWER SUPPLY	max 9W - 250mA
CODE	CAC02 ■ ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X 20° 30° 40° 60°
FINISHES	W - White B - Black
STEM LENGTH	1 - 170mm 2 - 420mm 3 - 670mm 4 - 920mm
LUMEN OUTPUT SOURCE	1200lm (3000 K CRI90, 250mA)
DELIVERED LUMEN OUTPUT	1010lm (3000 K CRI90, 250mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	head and base in painted aluminium, stem in painted brass
DRIVER	not included, see pag. 346 and 350
NOTES	other RAL on request, 24V version on request

PLG

Lilium suspended

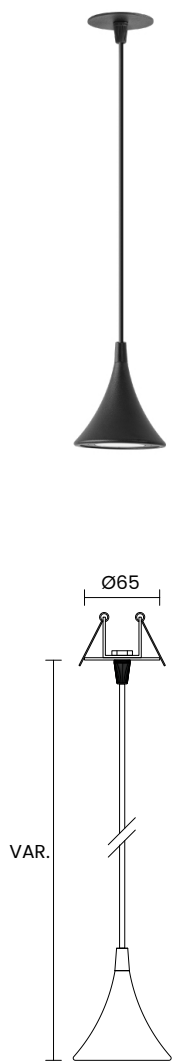


Ø 50mm CE III IP40 A+ A+ A+

POWER SUPPLY	max 12W - 350mA
CODE	LIS02
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N 15° M 25° W 40° D Diff.
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	1730lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	1290lm (3000 K CRI90, 350mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	head and base in painted aluminium, stem in painted brass
DRIVER	not included, see pag. 347 and 350
POWER CABLE	2 mt SUB4 FROST-UV 2x0,50 cable
NOTES	other RAL on request, 24V version on request

PLG

Lilium ceiling

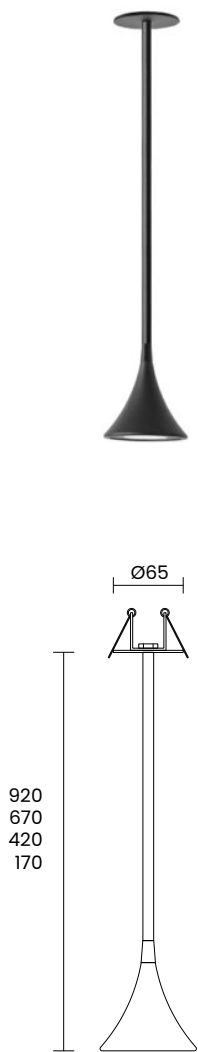

Ø 50mm CE III IP40 A+ A+ A+

POWER SUPPLY	max 12W - 350mA
CODE	LIC02
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N 15° M 25° W 40° D Diff.
FINISHES	W - White B - Black
STEM LENGTH	1 - 170mm 2 - 420mm 3 - 670mm 4 - 920mm
LUMEN OUTPUT SOURCE	1730lm (3000 K CRI90, 250mA)
DELIVERED LUMEN OUTPUT	1290lm (3000 K CRI90, 250mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	head and base in painted aluminium, stem in painted brass
DRIVER	not included, see pag. 347 and 350
NOTES	other RAL on request, 24V version on request

PLG

Gli apparecchi LED per esterno a marchio PLG coniugano affidabilità estetica, funzionalità e comfort visivo. Sono attentamente progettati e costruiti per durare nel tempo e per garantire un'efficace installazione in qualsiasi tipologia di ambiente, anche il più estremo.

I dispositivi PLG per esterno si caratterizzano per la massima flessibilità d'uso: forme, dimensioni e potenze diverse permettono di illuminare superfici di grandi dimensioni, come facciate e giardini, o di valorizzare dettagli architettonici e paesaggistici.

The outdoor LED luminaires combine reliability, aesthetics, functionality and visual comfort. Carefully executed and built to last over time and ensure effective installation in any type of environment, even the most extreme.

They offer maximum flexibility of use: different shapes, sizes and powers, to illuminate large surfaces, such as facades and gardens, or to enhance architectural and landscape details.

03 – Outdoor



Section index

SPOTLIGHTS

SPOTLIGHTS

SPOTLIGHTS

SPOTLIGHTS

INOX
SPOTLIGHTS

FLOOR
RECESSED

FLOOR
RECESSED

FLOOR
RECESSED

FLOOR
RECESSED

GRAZING
LIGHTS



OSCAR MICRO
PAG. 141



OSCAR MINI
PAG. 142



OSCAR
PAG. 143



OSCAR 12
PAG. 144



TINY
PAG. 165



SIGMA
PAG. 166



SIGMA INOX
PAG. 167



VENUS
PAG. 168



OSCAR 16
PAG. 145



COLIBRÌ
PAG. 146



NEXUS 6
PAG. 147



SIRIO PR
PAG. 148



GALAXY
PAG. 169



PLUTO
PAG. 170



PLUTO AR
PAG. 171



PLUTONE
PAG. 172



QUARK 6
PAG. 149



QUARK 10
PAG. 150



QUARK 15
PAG. 151



QUARK 20
PAG. 152



SIRIO IN
PAG. 173



MIRA 6
PAG. 174



MIRA 12
PAG. 175



MIRA 20
PAG. 176



QUARK 30
PAG. 153



MOON
PAG. 177



MICRO SPOT
PAG. 155



COLIBRÌ INOX
PAG. 156



SIRIO INOX
PAG. 157



DODO
PAG. 158



IBIS
PAG. 159



JOLLY
PAG. 179



JOLLY H
PAG. 180



JOLLY INOX
PAG. 181

Section index

CEILING
RECESSED



TINY
PAG. 183



SIGMA
PAG. 184



SIGMA INOX
PAG. 185



VENUS
PAG. 186



SOTTILE 3
PAG. 207



SOTTILE 6
PAG. 209



GAMMA
PAG. 210



GAMMA SQUARE
PAG. 211

WALL
RECESSED



GALAXY
PAG. 187



PLUTO
PAG. 188



PLUTO AR
PAG. 189



PLUTONE
PAG. 190



BRIO
PAG. 212



BRIO SQUARE
PAG. 214



BRIO ASY
PAG. 216



WIND
PAG. 217

WALL
RECESSED



MIRA 6
PAG. 191



MIRA 9
PAG. 192



MIRA 12
PAG. 193



STRIP 6
PAG. 219



STRIP 12
PAG. 220



STRIP 18
PAG. 221



STRIP 24
PAG. 222

LINEAR
LIGHTS



VENUS R
PAG. 195



PLUTONE R
PAG. 196



MIRA 9 R
PAG. 197



MIRA 12 R
PAG. 199



STRIP 36
PAG. 223

LINEAR
LIGHTS



VENUS TRIMLESS
PAG. 201



PLUTONE TRIMLESS
PAG. 202



MIRA 9 TRIMLESS
PAG. 203



MIRA 12 TRIMLESS
PAG. 203



DATURA CEILING
PAG. 225



MINI GLICINE CEILING
PAG. 226



GLICINE CEILING
PAG. 227



IRIS SUSPENDED
PAG. 228

SUSPENDED

BACKWARD
OPTIC

TRIMLESS
RECESSED

Section index



IRIS CEILING
PAG. 229



CALLA SUSPENDED
PAG. 230



CALLA CEILING
PAG. 231



LILIUM SUSPENDED
PAG. 232



LILIUM CEILING
PAG. 233



DATURA WALL
PAG. 235



DATURA HOOK
PAG. 237



DATURA APPLIQUE
PAG. 238



MINI GLICINE WALL
PAG. 239



MINI GLICINE HOOK
PAG. 240



GLICINE WALL
PAG. 241



GLICINE HOOK
PAG. 242



IRIS WALL
PAG. 243



CALLA WALL
PAG. 244



LILIUM WALL
PAG. 245



HALO
PAG. 247



PETUNIA
PAG. 249



FLOWERBELL
PAG. 250



FLOWERBELL BC
PAG. 251



FLOWERBELL ARCO
PAG. 253



PIPA
PAG. 255



IRIS
PAG. 256



IRIS BC
PAG. 257



IRIS ARCO
PAG. 258



CALLA
PAG. 259



CALLA BC
PAG. 260




CALLA ARCO
PAG. 261



LILIUM
PAG. 262



LILIUM BC
PAG. 263



LILIUM ARCO
PAG. 264



GRILLO
PAG. 265



DATURA
PAG. 267



DATURA L
PAG. 268



DATURA ARCO
PAG. 269



DATURA TREE
PAG. 270



MINI GLICINE
PAG. 271

SUSPENDED

SUSPENDED

WALL
SURFACE

WALL
SURFACE

WALL
SURFACE

GARDEN
LIGHTS

GARDEN
LIGHTS

GARDEN
LIGHTS

GARDEN
LIGHTS

GARDEN
LIGHTS

Section index



MINI GLICINE ARCO
PAG. 273



MINI GLICINE PATTERN
PAG. 275



MINI GLICINE TREE
PAG. 277



GLICINE
PAG. 279



BLADE
PAG. 315



BLADE HORIZONTAL
PAG. 317



RADENTE
PAG. 319



GLICINE ARCO
PAG. 281



GLICINE PATTERN
PAG. 283



GLICINE TREE
PAG. 285



BEE
PAG. 287



MICRO SPILLO
PAG. 323



MINI SPILLO
PAG. 325



SPILLO
PAG. 327



CENTRONE
PAG. 329



BOMBO
PAG. 289



GIRASOLE
PAG. 291



PIN
PAG. 292



STELO
PAG. 293



NOSE
PAG. 330



NOSE ADJ
PAG. 331



BORDO
PAG. 333



MAXI STELO
PAG. 295



STELO SFERA
PAG. 297



PENNISETUM
PAG. 299



JUNCUS
PAG. 301



APE
PAG. 303



FIREFLY
PAG. 307



ROBIN
PAG. 311




STEM
PAG. 313

Spotlights





Oscar micro



POWER SUPPLY	max 2W - max 500mA
CODE	OSC01 ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W D 20° 35° 50° Diff.
FINISHES	G - Grey B - Black
LUMEN OUTPUT SOURCE	180lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	150lm (3000 K CRI90, 500mA, 35°)
LED NUMBER	1 power LED
MATERIAL	body and flange in anodized aluminium
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,35 cable
ACCESSORIES	see pag. 160, 161 and 163
NOTES	24V version on request

PLG

Oscar mini




POWER SUPPLY	max 3W - max 350mA
CODE	OSC03 ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W 15° 25° 35°
FINISHES	B - Black K - Corten
LUMEN OUTPUT SOURCE	390lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	310lm (3000 K CRI90, 350mA, 35°)
LED NUMBER	3 power LED
MATERIAL	anodized and painted aluminium
DRIVER	not included, see pag. 347 and 350
POWER CABLE	1,5 mt Sub4 FROST-UV 2x0,50 cable
ACCESSORIES	see pag. 160, 161 and 163
NOTES	24V version on request, Other RAL on request



POWER SUPPLY	max 4W - max 1200mA
CODE	OSC04 ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X D 10° 25° 40° 60° Diff.
FINISHES	B - Black K - Corten
LUMEN OUTPUT SOURCE	380lm (3000 K, 1200mA)
DELIVERED LUMEN OUTPUT	320lm (3000 K, 1200mA, 40°)
LED NUMBER	1 power LED
MATERIAL	anodized and painted aluminium
DRIVER	not included, see pag. 349 and 350
POWER CABLE	1,5 mt Sub4 FROST-UV 2x0,50 cable
ACCESSORIES	see pag. 160, 161 and 163
NOTES	24V version on request, Other RAL on request


PLG

Oscar



POWER SUPPLY	max 6W - max 350mA max 9W - max 500mA
CODE	OSC02 ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X 20° 30° 40° 60°
FINISHES	B - Black K - Corten
LUMEN OUTPUT SOURCE	840lm (3000 K CRI90, 350mA) 1200lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	630lm (3000 K CRI90, 350mA, 40°) 850lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	anodized and painted aluminium
DRIVER	not included, see pag. 347, 348 and 350
POWER CABLE	includes 2 mt Sub4 FROST-UV 2x0,50 cable
ACCESSORIES	see pag. 160, 161 and 163
NOTES	Other RAL on request



PLG



POWER SUPPLY	max 6W - 24V max 9W - 24V
CODE	OSC246 (6W) - OSC249 (9W) ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X 20° 30° 40° 60°
FINISHES	B - Black K - Corten
LUMEN OUTPUT SOURCE	840lm (3000 K CRI90, 350mA) 1200lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	630lm (3000 K CRI90, 350mA, 40°) 850lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	anodized and painted aluminium
DRIVER	not included, see pag. 351
POWER CABLE	includes 2 mt Sub4 FROST-UV 2x0,50 cable
ACCESSORIES	see pag. 160, 161 and 163
NOTES	Other RAL on request

145

Oscar 12


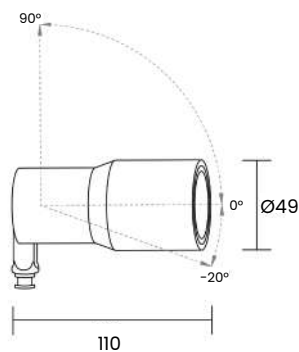


POWER SUPPLY	max 12W - max 700mA
CODE	OSC12
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X 20°30°40°60°
FINISHES	B - Black K - Corten
LUMEN OUTPUT SOURCE	1680lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	1120lm (3000 K CRI90, 700mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	anodized and painted aluminium
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 2mt Sub4 FROST-UV 2x0,50 cable
ACCESSORIES	see pag. 160, 161 and 163
NOTES	Other RAL on request




POWER SUPPLY	max 12W - 24V
CODE	OSC212
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X 20°30°40°60°
FINISHES	B - Black K - Corten
LUMEN OUTPUT SOURCE	1680lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	1120lm (3000 K CRI90, 350mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	anodized and painted aluminium
DRIVER	not included, see pag. 351
POWER CABLE	includes 2mt Sub4 FROST-UV 2x0,50 cable
ACCESSORIES	see pag. 160, 161 and 163
NOTES	Other RAL on request

Oscar 16

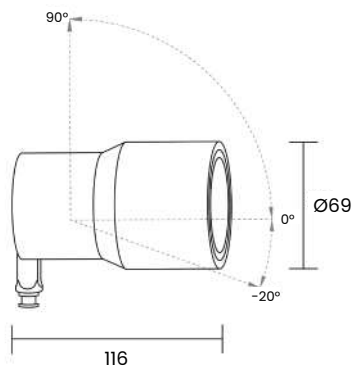


POWER SUPPLY	max 16W - max 900mA
CODE	OSC16
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X 15°24°36°60°
FINISHES	B - Black K - Corten
LUMEN OUTPUT SOURCE	2160lm (3000 K CRI90, 900mA)
DELIVERED LUMEN OUTPUT	1550lm (3000 K CRI90, 900mA, 36°)
LED NUMBER	1 power LED multichip
MATERIAL	anodized and painted aluminium
DRIVER	not included, see pag. 350
POWER CABLE	includes 2mt Sub4 FROST-UV 2x0,50 cable
ACCESSORIES	see pag. 160, 161 and 163
NOTES	Other RAL on request



POWER SUPPLY	max 16W - 24V
CODE	OSC216
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X 15°24°36°60°
FINISHES	B - Black K - Corten
LUMEN OUTPUT SOURCE	2160lm (3000 K CRI90, 900mA)
DELIVERED LUMEN OUTPUT	1550lm (3000 K CRI90, 900mA, 36°)
LED NUMBER	1 power LED multichip
MATERIAL	anodized and painted aluminium
DRIVER	not included, see pag. 351
POWER CABLE	includes 2mt Sub4 FROST-UV 2x0,50 cable
ACCESSORIES	see pag. 160, 161 and 163
NOTES	Other RAL on request


Colibrì



CE III 92gr IP67 A A+ A++	
POWER SUPPLY	max 3W - max 700mA
CODE	CB001
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N 10° M 25° W 40° X 60° T 110° D Diff.
FINISHES	G - Grey B - Black
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	215lm (3000 K CRI90, 700mA, 40°)
LED NUMBER	1 power LED
MATERIAL	body and flange in anodized aluminium
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	see pag. 160, 161 and 163
NOTES	24V version on request

PLG

Nexus 6

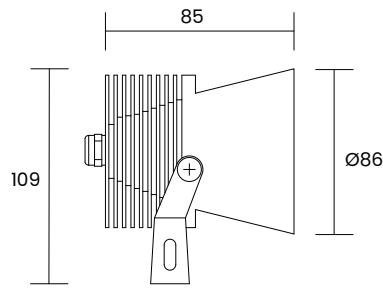


CE III 670gr IP67 A A+ A++	
POWER SUPPLY	max 12W - max 500mA
CODE	NX006
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N 10° M 25° W 40° X 60° T 110° D Diff.
FINISHES	G - Grey B - Black
LUMEN OUTPUT SOURCE	1080lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	840lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	6 power LEDs
MATERIAL	body and flange in anodized aluminium
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	see pag. 160
NOTES	24V version on request

PLG

CE 670gr IP65 A A+ A++	
POWER SUPPLY	max 6W - 220V / 240V
CODE	NXD06
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N 10° M 25° W 40° X 60° T 110° D Diff.
FINISHES	G - Grey B - Black
LUMEN OUTPUT SOURCE	660lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	640lm (3000 K CRI90, 350mA, 40°)
LED NUMBER	6 power LEDs
MATERIAL	body and flange in anodized aluminium
DRIVER	included
POWER CABLE	includes 1,5 mt H05RN-F 3 x 0,75 cable
ACCESSORIES	see pag. 160
NOTES	

149


Sirio pr

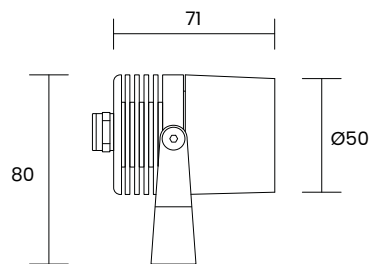

POWER SUPPLY	max 3W - max 700mA
CODE	SPR01
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 3°
FINISHES	G - Grey B - Black
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	170lm (3000 K CRI90, 700mA, 3°)
LED NUMBER	1 power LED
MATERIAL	body and flange in anodized aluminium
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,75 cable
ACCESSORIES	see pag. 160
NOTES	24V version on request

PLG

Quark 6

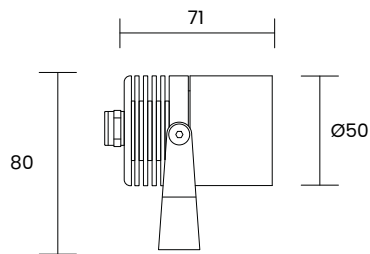

POWER SUPPLY	max 6W - max 350mA
CODE	QRK01
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 20° 30° 40° 60°
FINISHES	G - Grey B - Black
LUMEN OUTPUT SOURCE	840lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	450lm (3000 K CRI90, 350mA , 30°)
LED NUMBER	1 power LED multichip
MATERIAL	body and flange in anodized aluminium
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,75 cable
ACCESSORIES	see pag. 160, 161 and 163
NOTES	

PLG



POWER SUPPLY	max 6W - max 24V
CODE	QRK26
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 20° 30° 40° 60°
FINISHES	G - Grey B - Black
LUMEN OUTPUT SOURCE	840lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	450lm (3000 K CRI90, 350mA, 30°)
LED NUMBER	1 power LED
MATERIAL	body and flange in anodized aluminium
DRIVER	not included, see pag. 351
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,75 cable
ACCESSORIES	see pag. 160, 161 and 163
NOTES	

Quark 10



	    	    	    
POWER SUPPLY	max 10W - 250mA	max 10W - 220V / 240V	max 10W - 24V
CODE	QRK02   	QRK10   	QRK210   
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	    15° 25° 40° 60°	    15° 25° 40° 60°	    15° 25° 40° 60°
FINISHES	G - Grey B - Black	G - Grey B - Black	G - Grey B - Black
LUMEN OUTPUT SOURCE	1202lm (3000 K CRI90, 250mA)	1202lm (3000 K CRI90, 250mA)	1202lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	830lm (3000 K CRI90, 250mA, 40°)	830lm (3000 K CRI90, 250mA, 40°)	830lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED multichip	1 power LED multichip	1 power LED multichip
MATERIAL	anodized aluminium	anodized aluminium	anodized aluminium
DRIVER	not included, see pag. 346 - 350	included	not included, see pag. 351
POWER CABLE	1,5mt SUB4 FROST-UV 2x0,5 cable	1,5 mt H05RN-F 3 x 0,75 cable	1,5mt SUB4 FROST-UV 2x0,5 cable
ACCESSORIES	see pag. 160, 161 and 163	see pag. 160, 161 and 163	see pag. 160, 161 and 163
NOTES			

PLG


Quark 15



	    	    	    
POWER SUPPLY	max 15W - 250mA	max 15W - 220V / 240V	max 15W - 24V
CODE	QRK03   	QRK15   	QRK215   
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	    15° 25° 40° 60°	    15° 25° 40° 60°	    15° 25° 40° 60°
FINISHES	G - Grey B - Black	G - Grey B - Black	G - Grey B - Black
LUMEN OUTPUT SOURCE	1683lm (3000 K CRI90, 250mA)	1683lm (3000 K CRI90, 350mA)	1683lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	1150lm (3000 K CRI90, 250mA, 40°)	1150lm (3000 K CRI90, 350mA, 40°)	1150lm (3000 K CRI90, 700mA, 40°)
LED NUMBER	1 power LED multichip	1 power LED multichip	1 power LED multichip
MATERIAL	anodized aluminium	anodized aluminium	anodized aluminium
DRIVER	not included, see pag. 347 - 350	included	not included, see pag. 351
POWER CABLE	1,5mt SUB4 FROST-UV 2x0,5 cable	1,5 mt H05RN-F 3 x 0,75 cable	1,5mt SUB4 FROST-UV 2x0,5 cable
ACCESSORIES	see pag. 160, 161 and 163	see pag. 160, 161 and 163	see pag. 160, 161 and 163
NOTES			

PLG


Quark 20

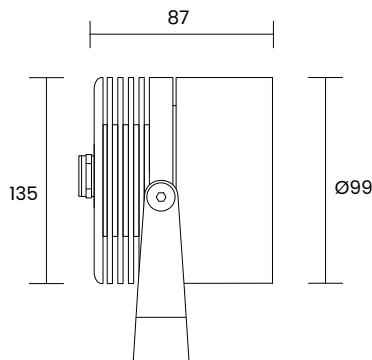

CE III  IP67  1200gr 		CE III  IP65  1200gr 		CE III  IP67  1200gr 	
POWER SUPPLY		max 20W - 500mA		max 20W - 220V / 240V	
CODE		QRK04   		QRK20   	
LED COLOUR		X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K		X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K	
OPTICS		N M W X 15° 25° 40° 60°		N M W X 15° 25° 40° 60°	
FINISHES		G - Grey B - Black		G - Grey B - Black	
LUMEN OUTPUT SOURCE		2405lm (3000 K CRI90, 500mA)		2405lm (3000 K CRI90, 500mA)	
DELIVERED LUMEN OUTPUT		1940lm (3000 K CRI90, 500mA, 40°)		1940lm (3000 K CRI90, 500mA, 40°)	
LED NUMBER		1 power LED multichip		1 power LED multichip	
MATERIAL		anodized aluminium		anodized aluminium	
DRIVER		not included, see pag. 348 - 350		included	
POWER CABLE		1,5mt SUB4 FROST-UV 2x0,5 cable		1,5 mt H05RN-F 3 x 0,75 cable	
ACCESSORIES		see pag. 160, 161 and 163		see pag. 160, 161 and 163	
NOTES				see pag. XXX - XXX	

PLG

Quark 30

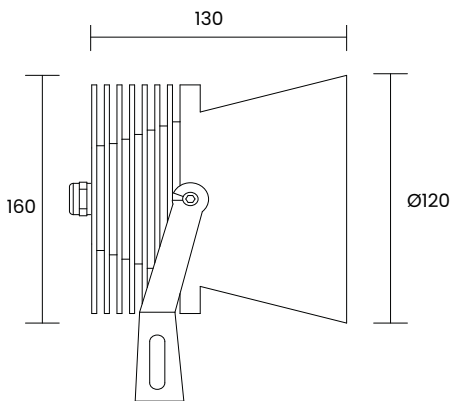

CE   IP65     1900gr		
POWER SUPPLY	max 30W - 220V / 240V	
CODE	QRK30   	
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K	
OPTICS	N M W 15° 30° 45°	
FINISHES	G - Grey B - Black	
LUMEN OUTPUT SOURCE	3220lm (3000 K CRI90, 700mA)	
DELIVERED LUMEN OUTPUT	2970lm (3000 K CRI90, 700mA, 45°)	
LED NUMBER	1 power LED multichip	
MATERIAL	body and flange in anodized aluminium	
DRIVER	included	
POWER CABLE	includes 1,5 mt H05RN-F 3 x 0,75 cable	
ACCESSORIES	see pag. 160	
NOTES		


PLG

155

Inox spotlights




Micro Spot



POWER SUPPLY	max 1W - max 350mA
CODE	MCS01 ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W 20° 35° 50°
FINISHES	I - Inox AISI 316L
LUMEN OUTPUT SOURCE	130lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	110lm (3000 K CRI90, 350mA, 35°)
LED NUMBER	1 power LED
MATERIAL	Inox AISI 316L
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,25 cable
ACCESSORIES	see pag. 160 and 161
NOTES	

PLG


Colibrì inox

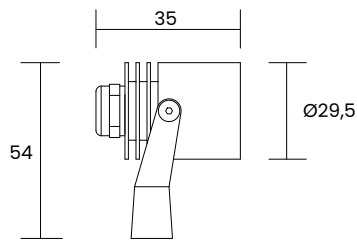

POWER SUPPLY	max 2W - max 500mA
CODE	CBI01 ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X T D 10°25°40°60°110°Diff.
FINISHES	I - Inox AISI 316L
LUMEN OUTPUT SOURCE	180lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	160lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED
MATERIAL	Inox AISI 316L
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	see pag. 160 and 161
NOTES	24V version on request


PLG

Sirio inox

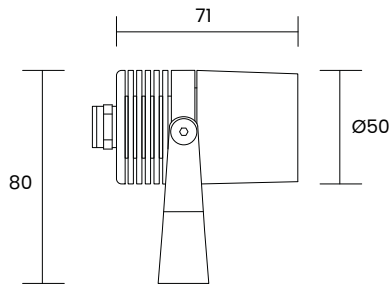

POWER SUPPLY	max 3W - max 700mA
CODE	SRX01 ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	S 3°
FINISHES	I - Inox AISI 316L
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	170lm (3000 K CRI90, 700mA, 3°)
LED NUMBER	1 power LED
MATERIAL	Inox AISI 316L
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	see pag. 160, 161 and 163
NOTES	24V version on request



PLG



POWER SUPPLY	max 6W - max 700mA
CODE	SRX02 ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X 20°30°40°60°
FINISHES	I - Inox AISI 316L
LUMEN OUTPUT SOURCE	800lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	430lm (3000 K CRI90, 700mA , 30°)
LED NUMBER	1 power LED multichip
MATERIAL	Inox AISI 316L
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	see pag. 160, 161 and 163
NOTES	24V version on request

159



Dodo

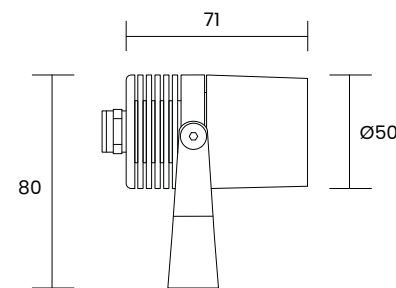

POWER SUPPLY	max 6W - max 500mA	
CODE	DDX01   	
 LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K	
 OPTICS	     15° 25° 40° 110° Diff.	
 FINISHES	I - Inox AISI 316L	
LUMEN OUTPUT SOURCE	540lm (3000 K CRI90, 500mA)	
DELIVERED LUMEN OUTPUT	420lm (3000 K CRI90, 500mA, 40°)	
LED NUMBER	3 power LEDs	
MATERIAL	Inox AISI 316L	
DRIVER	not included, see pag. 348 and 350	
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable	
ACCESSORIES	see pag. 160, 161 and 163	
NOTES	24V version on request	

PLG

Ibis

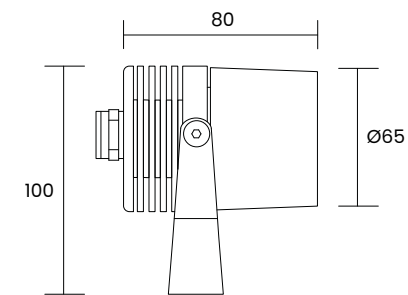

POWER SUPPLY	max 10W – max 250mA			
CODE	IBS01			
LED COLOUR	X – Warm white 2200 K J – Warm white 2700 K – CRI90 H – Warm white 3000 K – CRI90 N – Natural white 4000 K			
OPTICS	 15°  30°  45°			
FINISHES	I – Inox AISI 316L			
LUMEN OUTPUT SOURCE	1260lm (3000 K CRI90, 250mA)			
DELIVERED LUMEN OUTPUT	830lm (3000 K CRI90, 250mA, 45°)			
LED NUMBER	1 power LED multichip			
MATERIAL	Inox AISI 316L			
DRIVER	not included, see pag. 346 and 350			
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable			
ACCESSORIES	see pag. 160, 161 and 163			
NOTES	24V version on request			

PLG

Accessories
Installation



135

Code : **PI003**
Inox stake for:
OSCAR MICRO, COLIBRI
INOX SPOTLIGHTS



150

Code : **PI001**
Inox stake for:
QUARK 6, SIRIO PR, NEXUS 6
INOX SPOTLIGHTS




200

Code : **PI002**
Inox stake for:
QUARK 10, QUARK 15
INOX SPOTLIGHTS
Code : **PI010**
Inox stake for:
OSCAR MINI, OSCAR, OSCAR 12, OSCAR 16




250

Code : **PI013**
Inox stake for:
QUARK 20, QUARK 30




900
600
300

Code : **PI012**
Extension for:
QUARK 6, QUARK 10, QUARK 15, QUARK 20




550
400
200

Code : **PI012**
Extension for:
OSCAR MINI, OSCAR, OSCAR 12, OSCAR 16




550
400
200

Code : **PI016**
Extension for:
OSCAR MICRO, COLIBRI




900
600
300

Code : **PI009**
Mobile stake for:
QUARK 6, QUARK 10, QUARK 15, QUARK 20



850
600
400
200

Code : **PI018**
Mobile stake for:
OSCAR MINI, OSCAR, OSCAR 12, OSCAR 16



850
600
400
200

Code : **PI014**
Mobile stake for:
OSCAR MICRO, COLIBRI

Accessories
Installation



Ø60


Code : **BAS07**
Applique base for:
OSCAR MICRO, OSCAR MINI, OSCAR, OSCAR 12, OSCAR 16, COLIBRI, QUARK 6, QUARK 10, QUARK 15, QUARK 20



Code : **BAS03**
Base with central cable entry for:
OSCAR MINI, OSCAR, OSCAR 12, OSCAR 16



Code : **BAS04**
Base with side cable entry for:
OSCAR MINI, OSCAR, OSCAR 12, OSCAR 16




50

Code : **BAS05**
Cover for base x BAS03 for:
OSCAR MINI, OSCAR, OSCAR 12, OSCAR 16



150

Code : **PI004**
Inox stake for:
INOX SPOTLIGHTS
200mm in the ground + 150mm

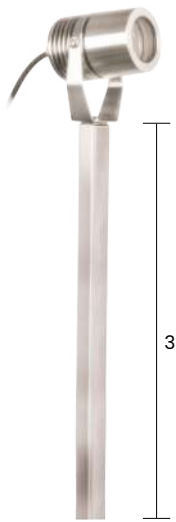

300

Code : **PI005**
Inox stake for:
INOX SPOTLIGHTS
200mm in the ground + 300mm



Accessories

Antiglare




Anti-glare cap for:

Code : **CAP05** OSCAR
OSCAR 12
QUARK 6
Code : **CAP07** QUARK 10
QUARK 15
Code : **CAP09** QUARK 20
Code : **CAP11** OSCAR 16
Code : **CAP13** OSCAR MINI
Code : **CAP15** COLIBRÌ




Anti-glare tube cap for:

Code : **CAP06** OSCAR
OSCAR 12
QUARK 6
Code : **CAP08** QUARK 10
QUARK 15
Code : **CAP10** QUARK 20
Code : **CAP12** OSCAR 16
Code : **CAP14** OSCAR MINI
Code : **CAP16** COLIBRÌ




Inox anti-glare cap for:

Code : **CAP11** SIRIO INOX
DODO




Inox anti-glare cap for:

Code : **CAP12** IBIS



Hex louver for:

Code : **NID05** OSCAR MICRO
Code : **NID06** OSCAR MINI
COLIBRÌ
Code : **NID01** OSCAR
OSCAR 12
QUARK 6
SIRIO INOX
DODO



Hex louver for:

Code : **NID02** OSCAR 16
QUARK 10
QUARK 15
IBIS
Code : **NID03** QUARK 20

Tree Light Belt



Code : **PLT05**
Fixing plate for:
OSCAR MICRO



Code : **PLT04**
Fixing plate for:
OSCAR MINI, OSCAR,
OSCAR 12, OSCAR 16,
QUARK 6, QUARK 10,
QUARK 15, QUARK 20,
QUARK 30




Code : **BLT02**
5m x 25mm belt to fix the
device to the tree trunk,
equipped with buckle - for:
OSCAR MICRO, OSCAR MINI,
OSCAR 12, OSCAR 16,
QUARK 6, QUARK 10, QUARK
15, QUARK 20, QUARK 30



Floor Recessed

Tiny

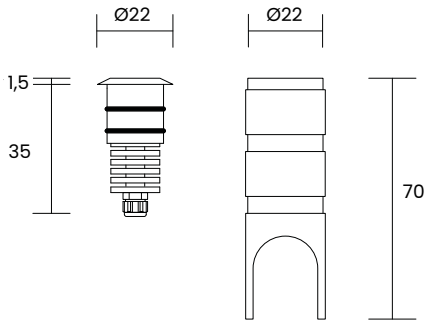


POWER SUPPLY	max 1W - max 350mA
CODE	NKE01 ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	M W X T D 20° 35° 50° 110° Diff.
FINISHES	G - Grey B - Black
LUMEN OUTPUT SOURCE	130lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	110lm (3000 K CRI90, 350mA, 35°)
LED NUMBER	1 power LED
MATERIAL	body and flange in anodized aluminium
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 0,5 mt Sub4 FROST-UV 2 x 0,25 cable
ACCESSORIES	outer case code : NK990
NOTES	



POWER SUPPLY	max 1W - max 350mA
CODE	TYI01 ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	M W X T D 20° 35° 50° 110° Diff.
FINISHES	I - Inox AISI 316L
LUMEN OUTPUT SOURCE	130lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	110lm (3000 K CRI90, 350mA, 35°)
LED NUMBER	1 power LED
MATERIAL	body in anodized aluminium, flange in Inox AISI 316L
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 0,5 mt Sub4 FROST-UV 2 x 0,25 cable
ACCESSORIES	outer case code : NK990
NOTES	

PLG


Sigma

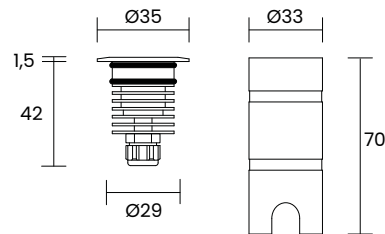

POWER SUPPLY	max 2W - max 500mA
CODE	SIGMI ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X E T D 10° 25° 40° 60° 30°x 65° 110° Diff.
FINISHES	G - Grey B - Black
LUMEN OUTPUT SOURCE	180lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	150lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED
MATERIAL	body and flange in anodized aluminium
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 0,50 cable
ACCESSORIES	outer case code : SG990
NOTES	24V version on request

PLG


Sigma inox

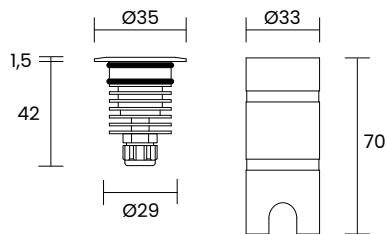

POWER SUPPLY	max 1W - max 350mA
CODE	SIGII ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X E T D 10° 25° 40° 60° 30°x 65° 110° Diff.
FINISHES	I - Inox AISI 316L
LUMEN OUTPUT SOURCE	130lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	110lm (3000 K CRI90, 350mA, 40°)
LED NUMBER	1 power LED
MATERIAL	body and flange in Inox AISI 316L
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	outer case code : SG990
NOTES	24V version on request

PLG



Venus

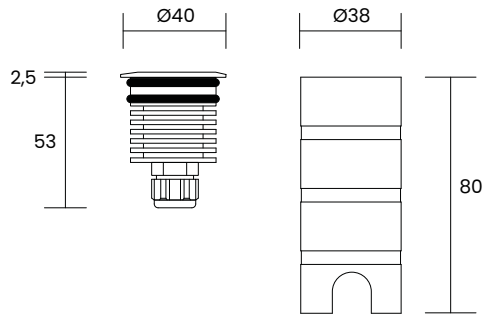

POWER SUPPLY	max 3W - max 700mA
CODE	VN001 ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X T T D 10° 25° 40° 60° 30° x 65° 110° Diff.
FINISHES	G - Grey B - Black
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	215lm (3000 K CRI90, 700mA, 40°)
LED NUMBER	1 power LED
MATERIAL	body and flange in anodized aluminium
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	outer case code : VN990
NOTES	24V version on request

PLG


Galaxy

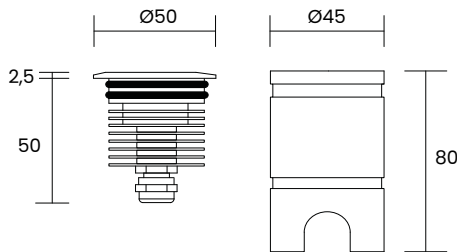

POWER SUPPLY	max 3W - max 350mA
CODE	GX003 ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W D 15° 25° 35° Diff.
FINISHES	I - Inox AISI 316L
LUMEN OUTPUT SOURCE	390lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	310lm (3000 K CRI90, 350mA, 35°)
LED NUMBER	3 power LEDs
MATERIAL	body in anodized aluminium, flange in Inox AISI 316L
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	outer case code : GX990
NOTES	24V version on request

PLG


Pluto

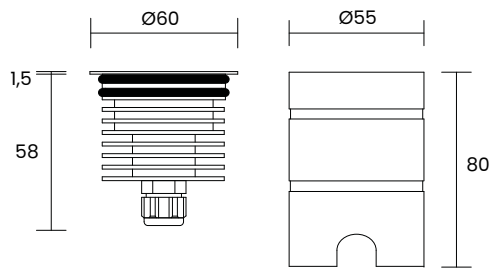

CE III 190gr IP67 A A+ A++	
POWER SUPPLY	max 3W - max 350mA
CODE	PL003
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W T D 15° 25° 40° 110° Diff.
FINISHES	I - Inox AISI 316L
LUMEN OUTPUT SOURCE	390lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	320lm (3000 K CRI90, 350mA, 40°)
LED NUMBER	3 power LEDs
MATERIAL	body in anodized aluminium, flange in Inox AISI 316L
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	outer case code : PL990
NOTES	24V version on request

PLG

Pluto ar

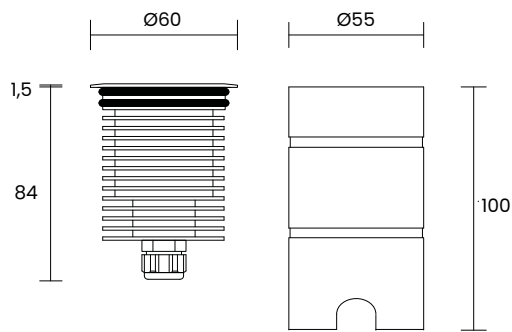


CE III 220gr IP67 A A+ A++	
POWER SUPPLY	max 6W - max 500mA
CODE	PAR03
LED COLOUR	X - Warm white 2200 K Y - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W T D 15° 25° 40° 110° Diff.
FINISHES	I - Inox AISI 316L
LUMEN OUTPUT SOURCE	540lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	420lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	3 power LEDs
MATERIAL	body in anodized aluminium, flange in Inox AISI 316L
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	outer case code : PA990
NOTES	24V version on request, honeycomb louver on request

PLG

173


Plutone

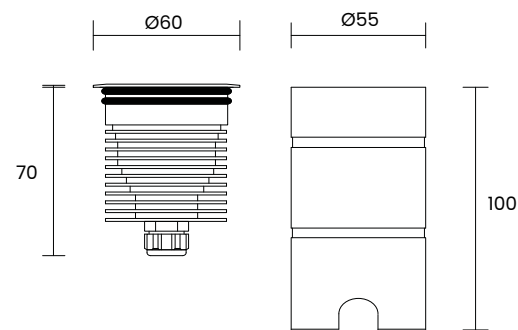

  IP67    	
POWER SUPPLY	max 6W – max 700mA
CODE	PLU01  
 LED COLOUR	X – Warm white 2200 K J – Warm white 2700 K – CRI90 H – Warm white 3000 K – CRI90 N – Natural white 4000 K
 OPTICS	      20° 30° 40° 60° 110° Diff.
 FINISHES	I – Inox AISI 316L
LUMEN OUTPUT SOURCE	800lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	530lm (3000 K CRI90, 700mA, 30°)
LED NUMBER	1 power LED multichip
MATERIAL	body in anodized aluminium, flange in Inox AISI 316L
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	outer case code : PA990
NOTES	24V version on request

PLG


Sirio in

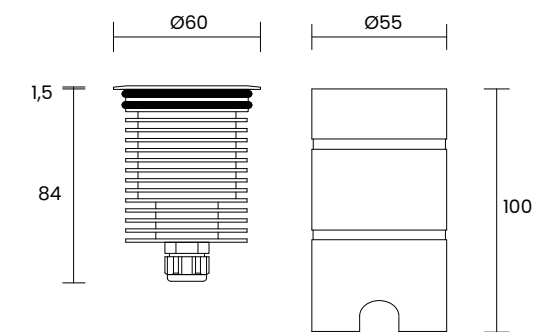

  IP67  220gr     	
POWER SUPPLY	max 4W - max 900mA
CODE	SRIII   
 LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
 OPTICS	
 FINISHES	I - Inox AISI 316L
LUMEN OUTPUT SOURCE	280lm (3000 K CRI90, 900mA)
DELIVERED LUMEN OUTPUT	240lm (3000 K CRI90, 900mA, 3°)
LED NUMBER	1 power LED
MATERIAL	body in anodized aluminium, flange in Inox AISI 316L
DRIVER	not included, see pag. 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	outer case code : PA990
NOTES	24V version on request, honeycomb louver on request

PLG


Mira 6

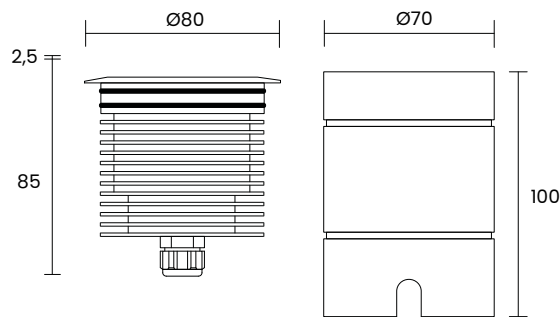

CE III 360gr IP67 A A+ A++	
POWER SUPPLY	max 6W - max 350mA
CODE	MIR06
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N 20° M 30° W 40° X 60° D Diff.
FINISHES	I - Inox AISI 316L
LUMEN OUTPUT SOURCE	890lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	650lm (3000 K CRI90, 350mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	body in anodized aluminium, flange in Inox AISI 316L
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	outer case code : MR990
NOTES	24V version on request, honeycomb louver on request

PLG


Mira 12

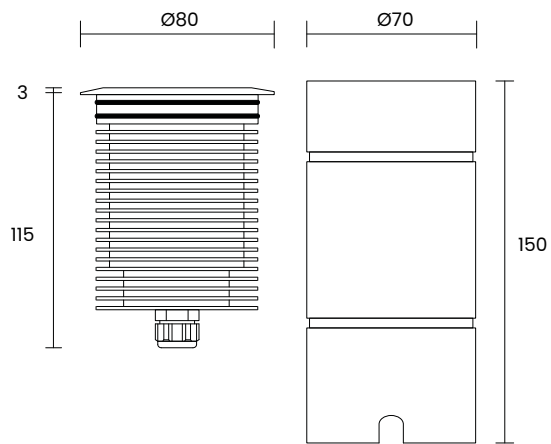

CE III 500gr IP67 A A+ A++	
POWER SUPPLY	max 12W - max 350mA
CODE	MIR12
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N 20° M 30° W 40° X 60° D Diff.
FINISHES	I - Inox AISI 316L
LUMEN OUTPUT SOURCE	1730lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	1290lm (3000 K CRI90, 350mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	body in anodized aluminium, flange in Inox AISI 316L
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	outer case code : MR991
NOTES	24V version on request, honeycomb louver on request

PLG


Mira 20

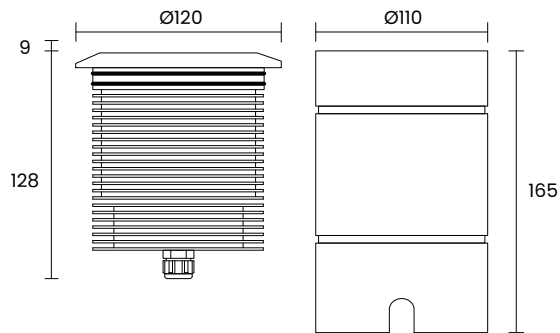

CE III 1450gr IP67 A A+ A++	
POWER SUPPLY	max 20W - max 500mA
CODE	MIR20
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X D 20° 30° 40° 60° Diff.
FINISHES	I - Inox AISI 316L
LUMEN OUTPUT SOURCE	2480lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	1940lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	body in anodized aluminium, flange in Inox AISI 316L
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	outer case code : MR992
NOTES	24V version on request

PLG

Moon

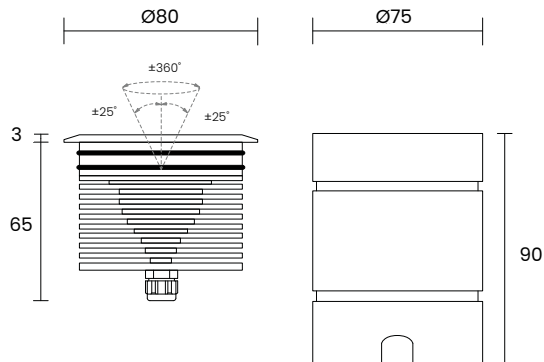




CE III 520gr IP67 A A+ A++	
POWER SUPPLY	max 6W - max 500mA
CODE	MOON3
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W D 15° 25° 35° Diff.
FINISHES	I - Inox AISI 316L
LUMEN OUTPUT SOURCE	540lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	420lm (3000 K CRI90, 350mA, 35°)
LED NUMBER	3 power LEDs
MATERIAL	body in anodized aluminium, flange in Inox AISI 316L
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	outer case code : MN990
NOTES	24V version on request

PLG

Grazing Lights



Jolly

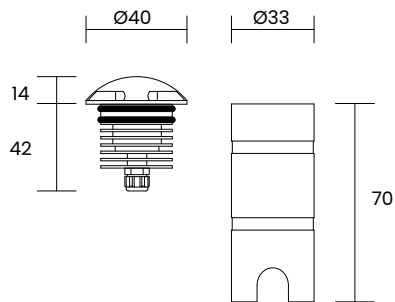


CE III 90gr IP67 90gr A+ A+ A+

POWER SUPPLY	max 2W - max 500mA	
CODE	JY001	■ ■
	JY002	■ ■
	JY003	■ ■
	JY004	■ ■
LED COLOUR	X - Warm white	2200 K
	J - Warm white	2700 K - CRI90
	H - Warm white	3000 K - CRI90
	N - Natural white	4000 K
FINISHES	G - Grey	
	B - Black	
LUMEN OUTPUT SOURCE	180lm (3000 K CRI90, 500mA)	
DELIVERED LUMEN OUTPUT	120lm (3000 K CRI90, 500mA)	
LED NUMBER	1 power LED	
MATERIAL	body and head in anodized aluminium	
DRIVER	not included, see pag. 348 and 350	
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable	
ACCESSORIES	outer case code : SG990	
NOTES	24V version on request	

PLG


Jolly h

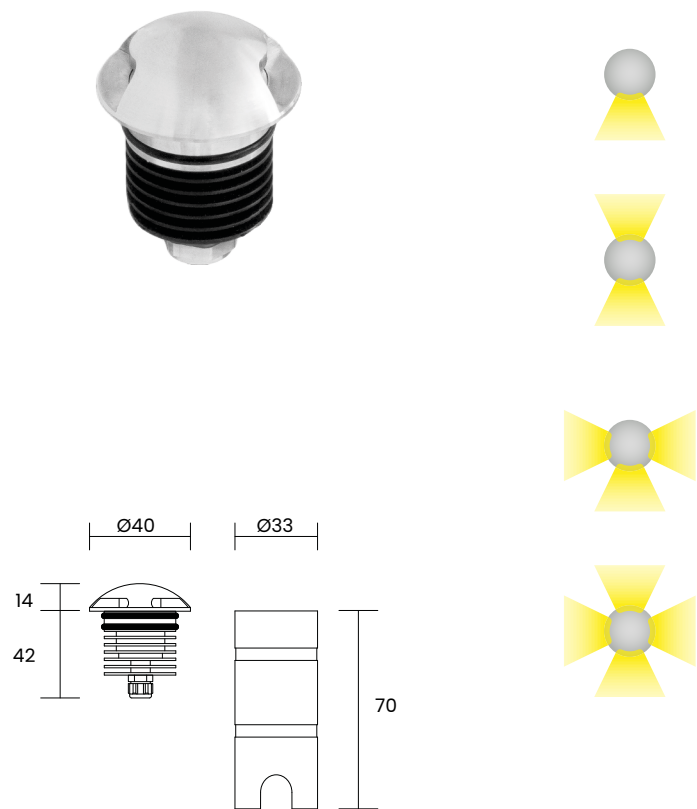

CE III 90gr IP67 A A+ A++	
POWER SUPPLY	max 2W - max 500mA
CODE	JH001 JH002 JH003 JH004
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
FINISHES	I - Inox AISI 316L
LUMEN OUTPUT SOURCE	180lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	120lm (3000 K CRI90, 500mA)
LED NUMBER	1 power LED
MATERIAL	body in anodized aluminium, head in Inox AISI 316L
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	outer case code : SG990
NOTES	24V version on request

PLG

Jolly inox

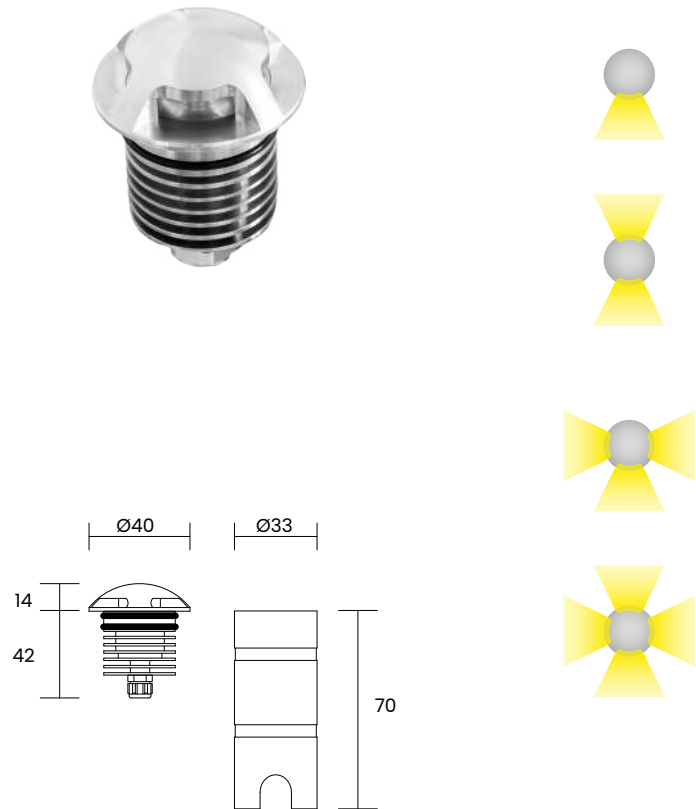


CE III 90gr IP67 A A+ A++	
POWER SUPPLY	max 1W - max 350mA
CODE	JI001 JI002 JI003 JI004
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
FINISHES	I - Inox AISI 316L
LUMEN OUTPUT SOURCE	130lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	70lm (3000 K CRI90, 500mA)
LED NUMBER	1 power LED
MATERIAL	body and head in Inox AISI 316L
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	outer case code : SG990
NOTES	24V version on request


PLG




Ceiling Recessed

Tiny




POWER SUPPLY	max 1W - max 350mA
CODE	NKMI1 
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 20° 35° 50° 20°x 45° 110° Diff.
FINISHES	G - Grey B - Black
LUMEN OUTPUT SOURCE	130lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	110lm (3000 K CRI90, 350mA, 35°)
LED NUMBER	1 power LED
MATERIAL	body and flange in anodized aluminium
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 0,5 mt Sub4 FROST-UV 2 x 0,25 cable
NOTES	



POWER SUPPLY	max 1W - max 350mA
CODE	TYIMI1 
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 20° 35° 50° 20°x 45° 110° Diff.
FINISHES	I - Inox AISI 316L
LUMEN OUTPUT SOURCE	130lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	110lm (3000 K CRI90, 350mA, 35°)
LED NUMBER	1 power LED
MATERIAL	body in anodized aluminium, flange in Inox AISI 316L
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 0,5 mt Sub4 FROST-UV 2 x 0,25 cable
NOTES	

PLG



Sigma



POWER SUPPLY	max 2W - max 500mA
CODE	SIGMI ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X E T D 10° 25° 40° 60° 30°x 65° 110° Diff.
FINISHES	G - Grey B - Black
LUMEN OUTPUT SOURCE	180lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	150lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED
MATERIAL	body and flange in anodized aluminium
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	24V version on request

PLG


Sigma inox



POWER SUPPLY	max 1W - max 350mA
CODE	SIMI ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X E T D 10° 25° 40° 60° 30°x 65° 110° Diff.
FINISHES	I - Inox AISI 316L
LUMEN OUTPUT SOURCE	130lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	110lm (3000 K CRI90, 350mA, 40°)
LED NUMBER	1 power LED
MATERIAL	body and flange in Inox AISI 316L
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	24V version on request

PLG


Venus



POWER SUPPLY	max 3W - max 700mA
CODE	VNM01 ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X T D 10°25°40°60°110°Diff.
FINISHES	G - Grey B - Black
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	215lm (3000 K CRI90, 700mA, 40°)
LED NUMBER	1 power LED
MATERIAL	body and flange in anodized aluminium
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	24V version on request

PLG


Galaxy



POWER SUPPLY	max 3W - max 350mA
CODE	GXM03 ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W D 15°25°30°Diff.
FINISHES	I - Inox AISI 316L
LUMEN OUTPUT SOURCE	390lm (3000 K CRI90 , 350mA)
DELIVERED LUMEN OUTPUT	310lm (3000 K CRI90, 350mA, 30°)
LED NUMBER	3 power LEDs
MATERIAL	body in anodized aluminium, flange in Inox AISI 316L
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	24V version on request

PLG


Pluto



Ø 52mm CE III IP67 190gr A A+ A++	
POWER SUPPLY	max 3W - max 350mA
CODE	PLM03
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W T D 15° 25° 40° 110° Diff.
FINISHES	I - Inox AISI 316L
LUMEN OUTPUT SOURCE	390lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	320lm (3000 K CRI90, 350mA, 40°)
LED NUMBER	3 power LEDs
MATERIAL	body in anodized aluminium, flange in Inox AISI 316L
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	24V version on request

PLG


Pluto ar



Ø 52mm CE III IP67 220gr A A+ A++	
POWER SUPPLY	max 6W - max 500mA
CODE	PARM3
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W T D 15° 25° 40° 110° Diff.
FINISHES	I - Inox AISI 316L
LUMEN OUTPUT SOURCE	540lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	420lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	3 power LEDs
MATERIAL	body in anodized aluminium, flange in Inox AISI 316L
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	24V version on request, honeycomb louver on request

PLG


Plutone



 Ø 54mm			 230gr	 IP67			
POWER SUPPLY		max 6W - max 700mA					
CODE		PLUM1   					
LED COLOUR		X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K					
OPTICS		     					
FINISHES		I - Inox AISI 316L					
LUMEN OUTPUT SOURCE		800lm (3000 K CRI90, 700mA)					
DELIVERED LUMEN OUTPUT		530lm (3000 K CRI90, 700mA, 30°)					
LED NUMBER		1 power LED multichip					
MATERIAL		body in anodized aluminium, flange in Inox AISI 316L					
DRIVER		not included, see pag. 349 and 350					
POWER CABLE		includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable					
NOTES		24V version on request					

PLG


Mira 6

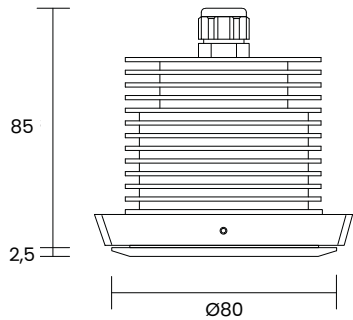

 Ø 78mm			 360gr	 IP67			
POWER SUPPLY		max 6W - max 350mA					
CODE		MIRM6   					
LED COLOUR		X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K					
OPTICS		    					
FINISHES		I - Inox AISI 316L					
LUMEN OUTPUT SOURCE		890lm (3000 K CRI90, 350mA)					
DELIVERED LUMEN OUTPUT		650lm (3000 K CRI90, 350mA, 40°)					
LED NUMBER		1 power LED multichip					
MATERIAL		body in anodized aluminium, flange in Inox AISI 316L					
DRIVER		not included, see pag. 347 and 350					
POWER CABLE		includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable					
NOTES		24V version on request, honeycomb louver on request					

PLG


Mira 9

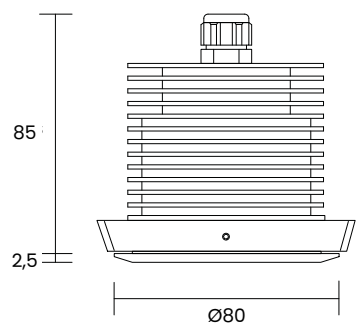

 Ø 78mm   IP67  360gr 	
POWER SUPPLY	max 9W - max 250mA
CODE	MIRM9   
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	   
FINISHES	I - Inox AISI 316L
LUMEN OUTPUT SOURCE	1260lm (3000 K CRI90, 250mA)
DELIVERED LUMEN OUTPUT	810lm (3000 K CRI90, 250mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	body in anodized aluminium, flange in Inox AISI 316L
DRIVER	not included, see pag. 346 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	24V version on request, honeycomb louver on request


PLG

Mira 12

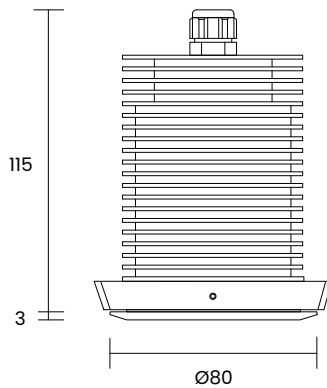

 Ø 78mm   IP67  500gr 	
POWER SUPPLY	max 12W - max 350mA
CODE	MRM12   
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	    
FINISHES	I - Inox AISI 316L
LUMEN OUTPUT SOURCE	1730lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	1290lm (3000 K CRI90, 350mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	body in anodized aluminium, flange in Inox AISI 316L
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	24V version on request, honeycomb louver on request


PLG



 Ø 38mm							
POWER SUPPLY		max 3W – max 700mA					
CODE		VNR01   					
LED COLOUR		X – Warm white 2200 K J – Warm white 2700 K – CRI90 H – Warm white 3000 K – CRI90 N – Natural white 4000 K					
OPTICS		      10° 25° 40° 60° 110° Diff.					
FINISHES		W – White B – Black					
LUMEN OUTPUT SOURCE		230lm (3000 K CRI90, 700mA)					
DELIVERED LUMEN OUTPUT		215lm (3000 K CRI90, 700mA, 40°)					
LED NUMBER		1 power LED					
MATERIAL		body in anodized aluminium, flange in painted aluminium					
DRIVER		not included, see pag. 349 and 350					
POWER CABLE		includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable					
NOTES		other RAL on request, 24V version on request					

PLG


Plutone r



 Ø 54mm			 IP67	 240gr			
POWER SUPPLY		max 6W - max 700mA					
CODE		PLURI   					
LED COLOUR		X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K					
OPTICS		     					
FINISHES		W - White B - Black					
LUMEN OUTPUT SOURCE		800lm (3000 K CRI90, 700mA)					
DELIVERED LUMEN OUTPUT		530lm (3000 K CRI90, 700mA, 30°)					
LED NUMBER		1 power LED multichip					
MATERIAL		body in anodized aluminium, flange in painted aluminium					
DRIVER		not included, see pag. 349 and 350					
POWER CABLE		includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable					
NOTES		other RAL on request, 24V version on request					

PLG

Mira 9 r




 Ø 70mm			 IP67	 370gr			
POWER SUPPLY		max 9W - max 250mA					
CODE		MIRR9   					
LED COLOUR		X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K					
OPTICS		    					
FINISHES		W - White B - Black					
LUMEN OUTPUT SOURCE		1260lm (3000 K CRI90, 250mA)					
DELIVERED LUMEN OUTPUT		810lm (3000 K CRI90, 250mA, 40°)					
LED NUMBER		1 power LED multichip					
MATERIAL		body in anodized aluminium, flange in painted aluminium					
DRIVER		not included, see pag. 346 and 350					
POWER CABLE		includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable					
NOTES		other RAL on request, 24V version on request					

PLG



Mira 12 r



Ø 70mm CE III 450gr IP67 ∞ A A+ A++


POWER SUPPLY	max 12W - max 350mA
CODE	MIRRI2
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	20° 30° 40° 60° Diff.
FINISHES	W - White B - Black
LUMEN OUTPUT SOURCE	1730lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	1290lm (3000 K CRI90, 350mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	body in anodized aluminium, flange in painted aluminium
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	other RAL on request, 24V version on request


PLG

Trimless Recessed




Venus trimless




       	
POWER SUPPLY	max 3W - max 700mA
CODE	VNT01   
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	     
FINISHES	W - White G - Grey B - Black
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	215lm (3000 K CRI90, 700mA, 40°)
LED NUMBER	1 power LED
MATERIAL	body in anodized aluminium, flange in painted aluminium
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	see pag. 207
NOTES	other RAL on request, 24V version on request

PLG


Plutone trimless




        	
POWER SUPPLY	max 6W - max 700mA
CODE	PLUT1   
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	     
FINISHES	W - White G - Grey B - Black
LUMEN OUTPUT SOURCE	800lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	530lm (3000 K CRI90, 700mA, 30°)
LED NUMBER	1 power LED multichip
MATERIAL	body in anodized aluminium, flange in painted aluminium
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	see pag. 207
NOTES	other RAL on request, 24V version on request

PLG


Mira 9 trimless



        	
POWER SUPPLY	max 9W - max 250mA
CODE	MIRT9   
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	    
FINISHES	W - White G - Grey B - Black
LUMEN OUTPUT SOURCE	1260lm (3000 K CRI90, 250mA)
DELIVERED LUMEN OUTPUT	810lm (3000 K CRI90, 250mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	body in anodized aluminium, flange in painted aluminium
DRIVER	not included, see pag. 346 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	see pag. 207
NOTES	other RAL on request, 24V version on request


PLG

Mira 12 trimless




 Ø 80mm			 IP67	 470gr	
POWER SUPPLY					
max 12W - max 350mA					
CODE					
MRT12   					
LED COLOUR					
X - Warm white 2200 K					
J - Warm white 2700 K - CRI90					
H - Warm white 3000 K - CRI90					
N - Natural white 4000 K					
OPTICS					
 N  M  W  X  D					
20° 30° 40° 60° Diff.					
FINISHES					
W - White					
G - Grey					
B - Black					
LUMEN OUTPUT SOURCE					
1730lm (3000 K CRI90 , 350mA)					
DELIVERED LUMEN OUTPUT					
1290lm (3000 K CRI90, 350mA, 40°)					
LED NUMBER					
1 power LED multichip					
MATERIAL					
body in anodized aluminium, flange in painted aluminium					
DRIVER					
not included, see pag. 347 and 350					
POWER CABLE					
includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable					
ACCESSORIES					
see pag. 207					
NOTES					
other RAL on request, 24V version on request					

Trimless Recessed
Installation Accessories

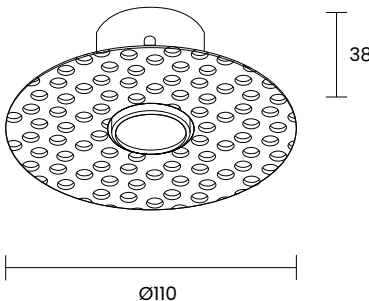


Code : **CTR01**
Plasterboard flange for
VENUS TRIMLESS

W - White
G - Grey
B - Black

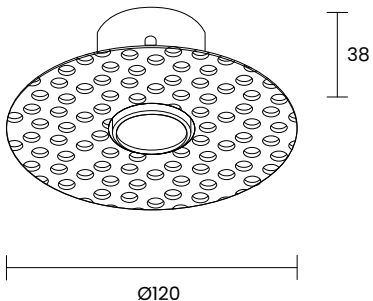

Code : **CTR02**
Plasterboard flange for
PLUTONE TRIMLESS

W - White
G - Grey
B - Black

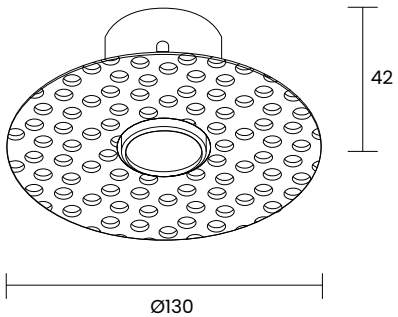

Code : **CTR03**
Plasterboard flange for
MIRA 9 TRIMLESS
MIRA 12 TRIMLESS




W - White
G - Grey
B - Black

 To be ordered at the same time as the lighting device




Wall Recessed

Sottile 3


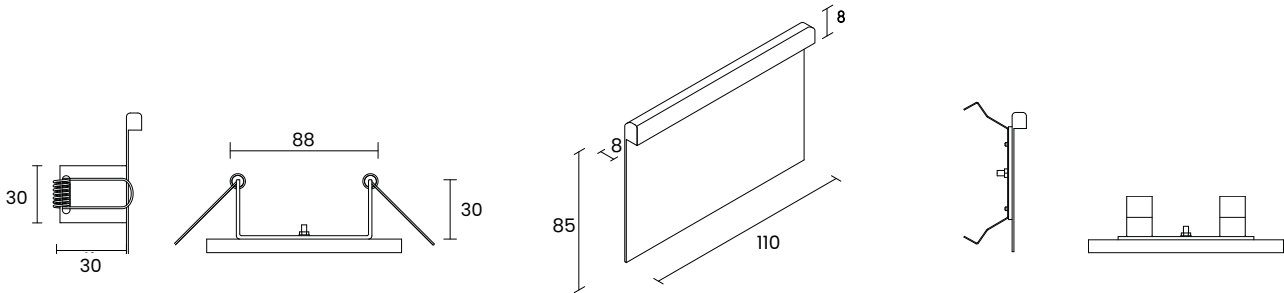



POWER SUPPLY	max 1,5W - 24V
CODE	SOTB3 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Diff.
FINISHES	W - White G - Grey B - Black K - Corten
LUMEN OUTPUT SOURCE	150lm (3000 K CRI90)
DELIVERED LUMEN OUTPUT	150lm (3000 K CRI90)
LED NUMBER	Strip led
MATERIAL	Body in painted Inox AISI 316L
DRIVER	not included, see pag. 351
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
ACCESSORIES	503 flush-mounting box included
NOTES	other RAL on request

PLG

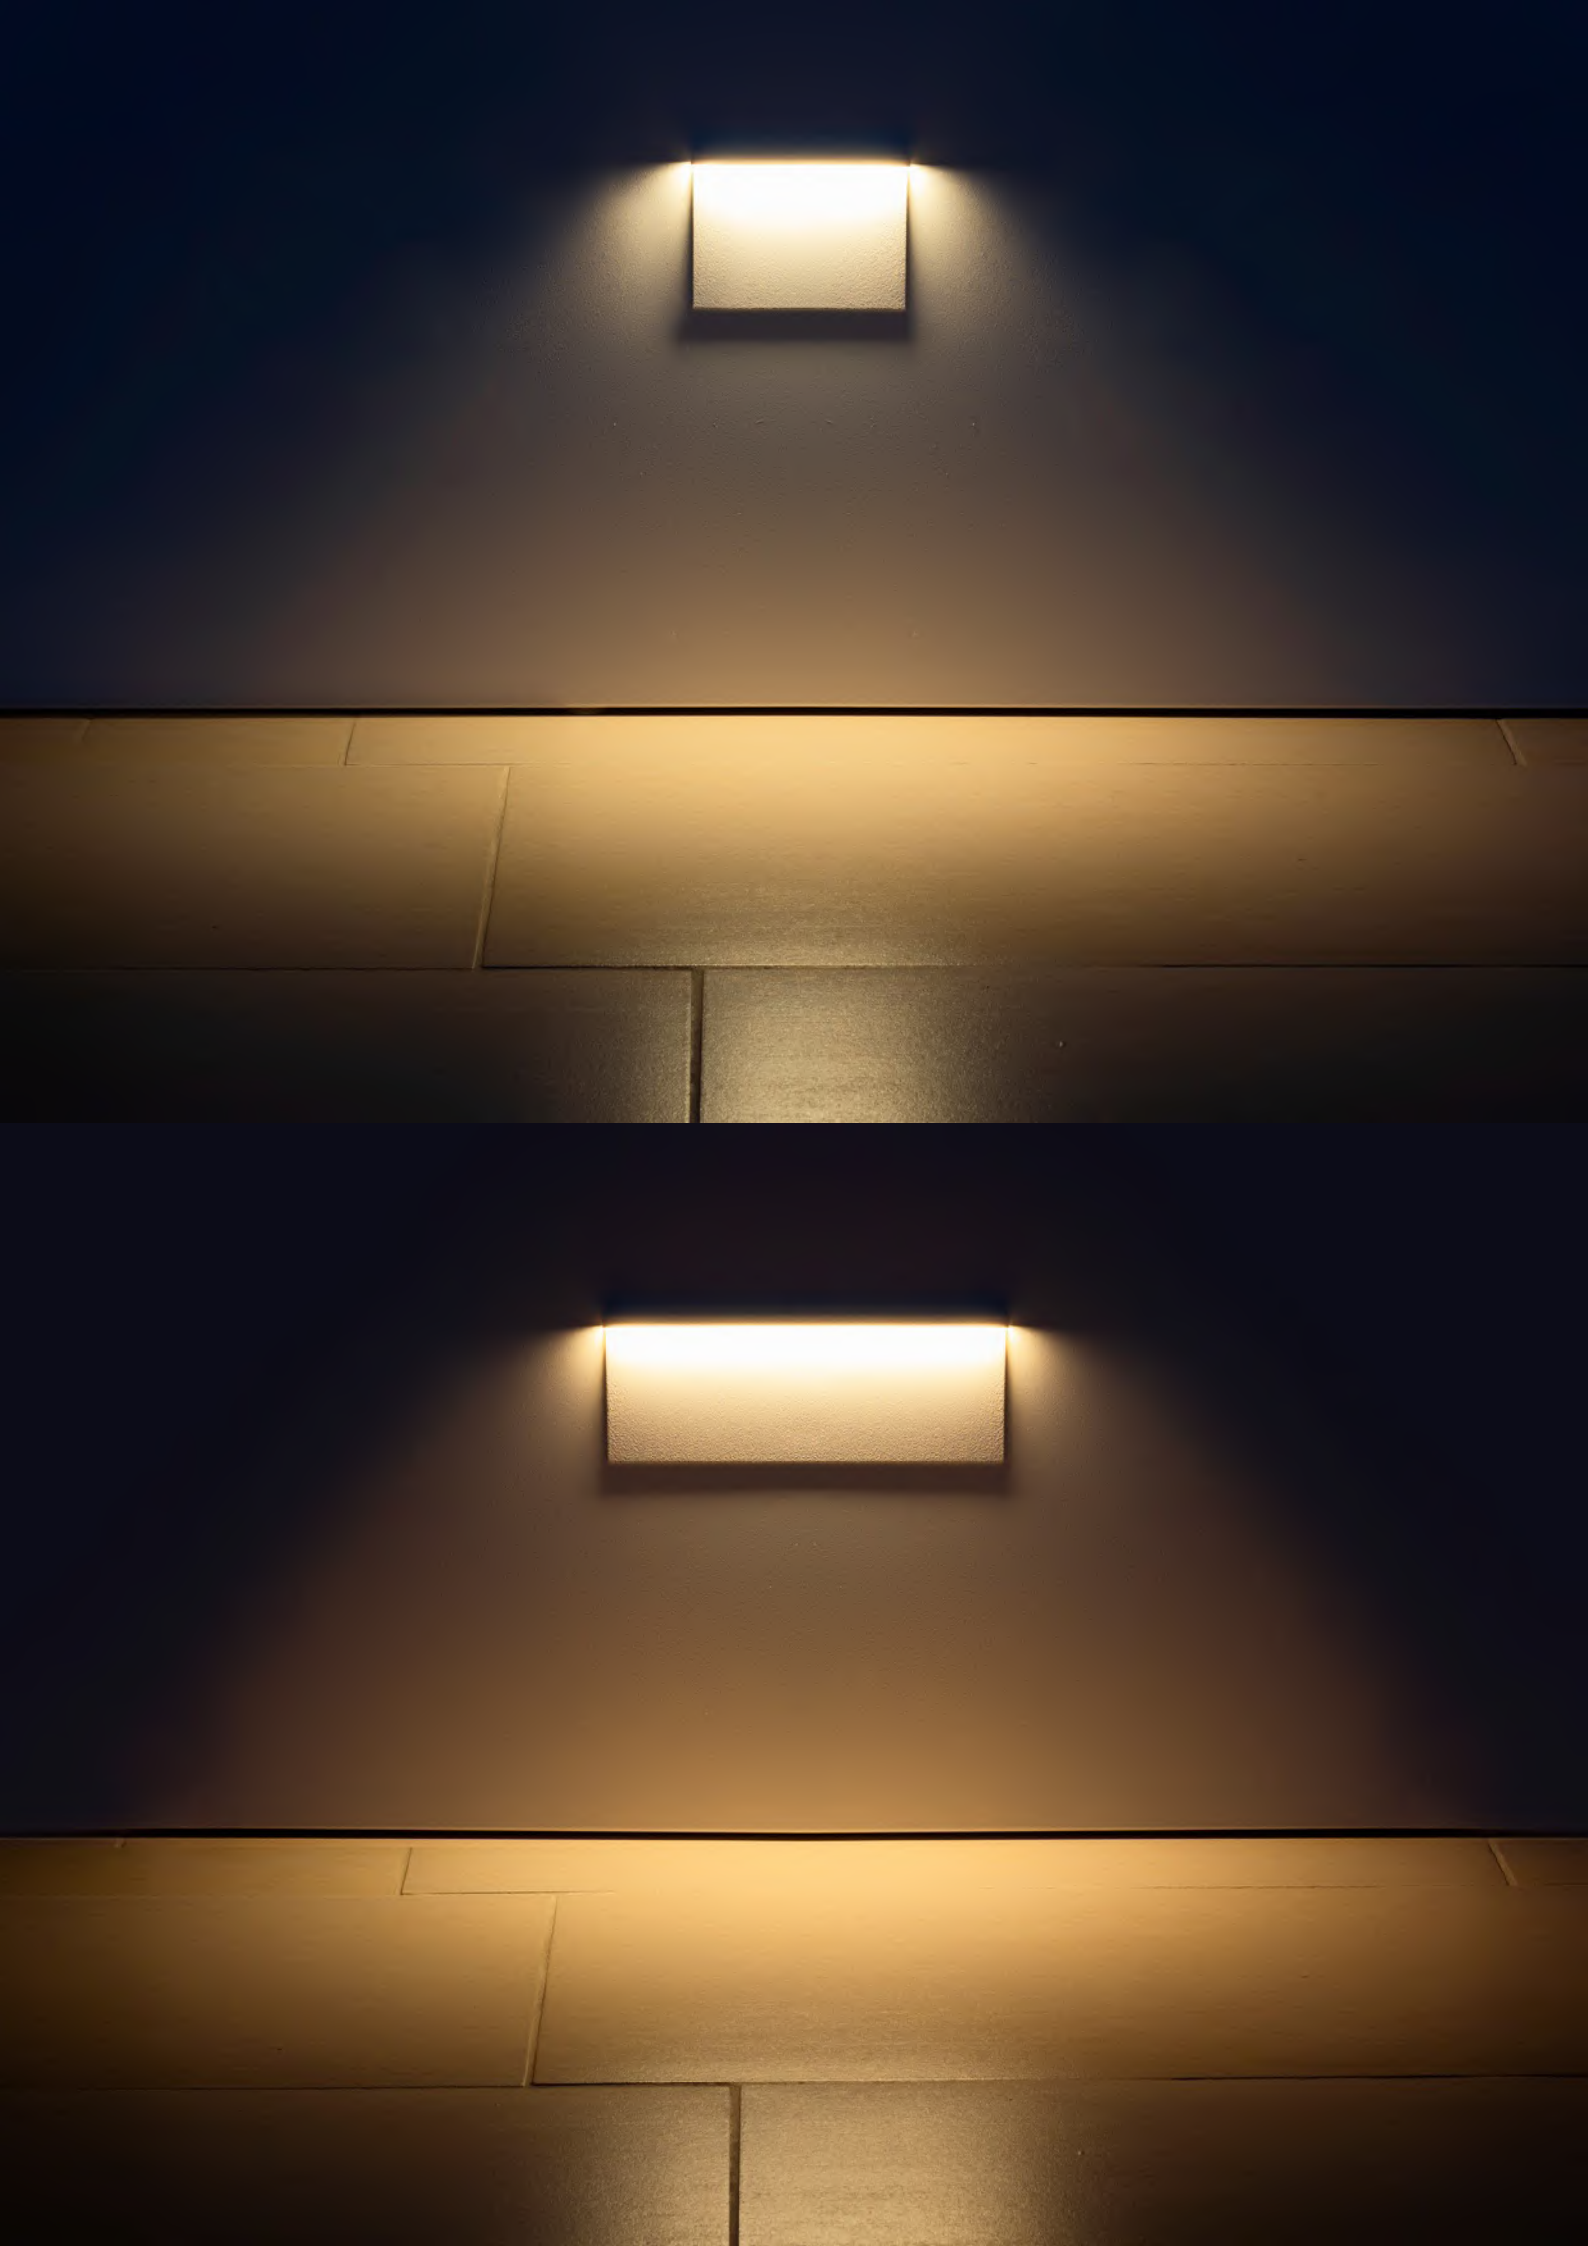



Sottile 6

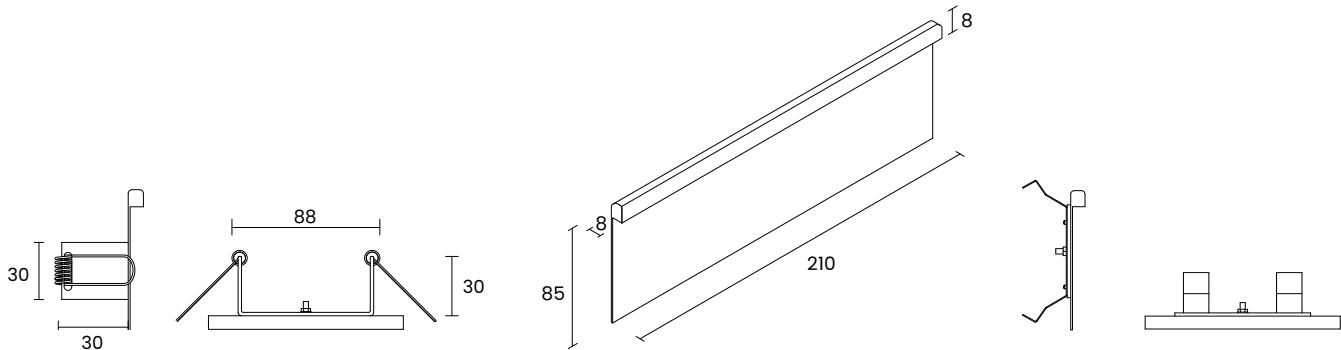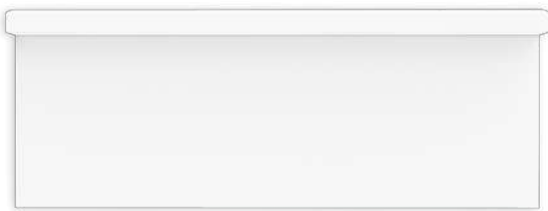

POWER SUPPLY	max 1,5W - 24V
CODE	SOTB6 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Diff.
FINISHES	W - White G - Grey B - Black K - Corten
LUMEN OUTPUT SOURCE	150lm (3000 K CRI90)
DELIVERED LUMEN OUTPUT	150lm (3000 K CRI90)
LED NUMBER	Strip led
MATERIAL	Body in painted Inox AISI 316L
DRIVER	not included, see pag. 351
POWER CABLE	includes 0,5 mt FEP 2 x 0,35 cable
ACCESSORIES	506 flush-mounting box included
NOTES	other RAL on request

PLG



Gamma

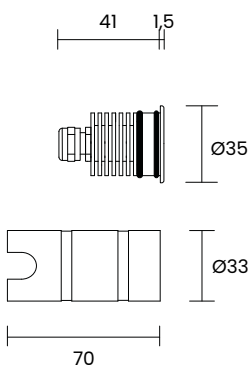

POWER SUPPLY	max 2W - max 500mA		
CODE	GAM01 		
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K		
OPTICS	N M W X 10°25°40°60°		
FINISHES	G - Grey B - Black		
LUMEN OUTPUT SOURCE	180lm (3000 K CRI90, 500mA)		
DELIVERED LUMEN OUTPUT	150lm (3000 K CRI90, 500mA, 40°)		
LED NUMBER	1 power LED		
MATERIAL	body and flange in anodized aluminium		
DRIVER	not included, see pag. 348 and 350		
POWER CABLE	includes 1,5 mt SUB4 FROST-UV 2x0,50 cable		
ACCESSORIES			
NOTES	24V version on request		


PLG

Gamma square

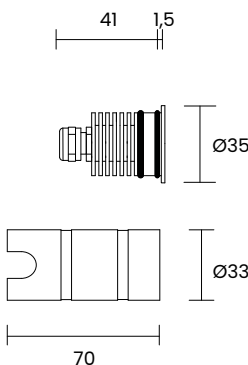

POWER SUPPLY	max 2W - max 500mA		
CODE	GASM1 		
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K		
OPTICS	N M W X 10°25°40°60°		
FINISHES	G - Grey B - Black		
LUMEN OUTPUT SOURCE	180lm (3000 K CRI90, 500mA)		
DELIVERED LUMEN OUTPUT	150lm (3000 K CRI90, 500mA, 40°)		
LED NUMBER	1 power LED		
MATERIAL	body and flange in anodized aluminium		
DRIVER	not included, see pag. 348 and 350		
POWER CABLE	includes 1,5 mt SUB4 FROST-UV 2x0,50 cable		
ACCESSORIES			
NOTES	24V version on request		


PLG




POWER SUPPLY	max 2W - max 500mA		
CODE	GAS01 		
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K		
OPTICS	N M W X 10°25°40°60°		
FINISHES	G - Grey B - Black		
LUMEN OUTPUT SOURCE	180lm (3000 K CRI90, 500mA)		
DELIVERED LUMEN OUTPUT	150lm (3000 K CRI90, 500mA, 40°)		
LED NUMBER	1 power LED		
MATERIAL	body and flange in anodized aluminium		
DRIVER	not included, see pag. 348 and 350		
POWER CABLE	includes 1,5 mt SUB4 FROST-UV 2x0,50 cable		
ACCESSORIES	outer case - code : SG990		
NOTES	24V version on request		

213


Brio

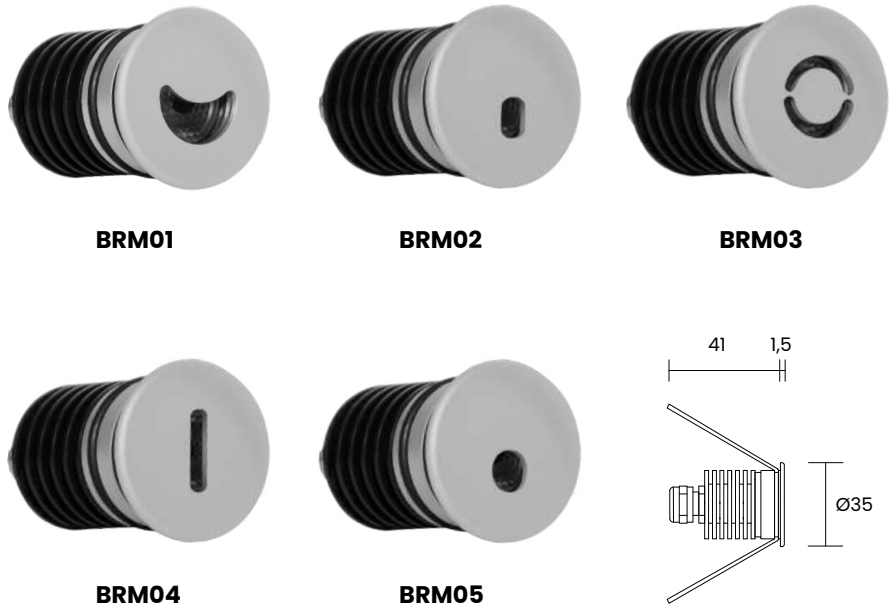

 Ø 31mm			 IP67	 88gr		
POWER SUPPLY	max 2W - max 500mA					
CODE	BRM01 BRM02 BRM03 BRM04 BRM05 					
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K					
OPTICS	 Asymmetric					
FINISHES	G - Grey B - Black					
LUMEN OUTPUT SOURCE	180lm (3000 K CRI90, 500mA)					
DELIVERED LUMEN OUTPUT	150lm (3000 K CRI90, 500mA, Asy.)					
LED NUMBER	1 power LED					
MATERIAL	body and flange in anodized aluminium					
DRIVER	not included, see pag. 348 and 350					
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable					
NOTES	24V version on request					

PLG


Brio

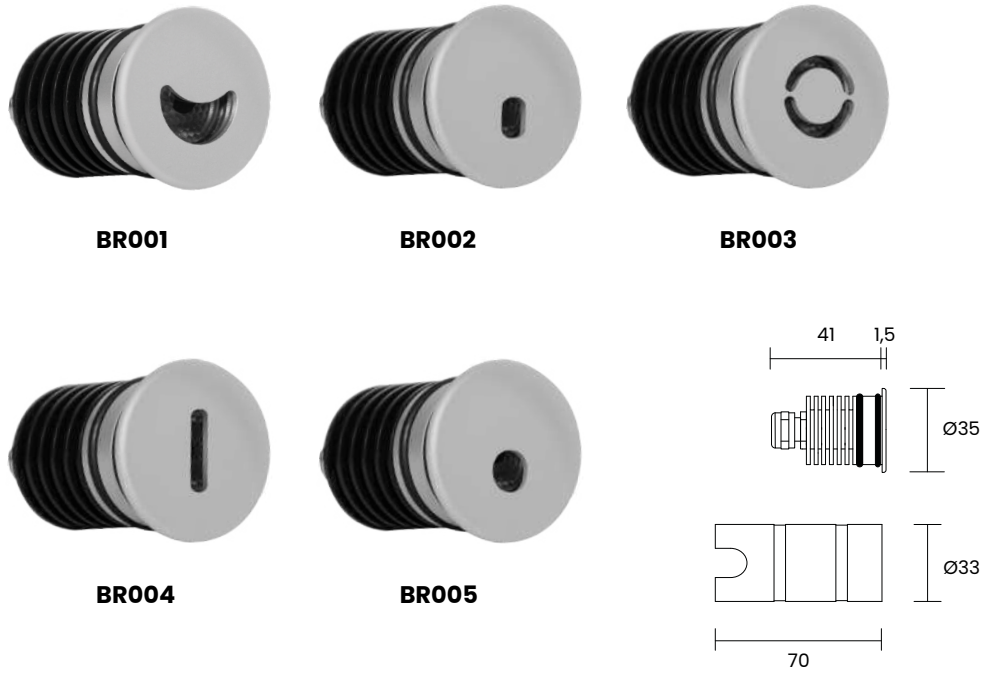

		 IP67	 88gr		
POWER SUPPLY	max 2W - max 500mA				
CODE	BR001 BR002 BR003 BR004 BR005 				
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K				
OPTICS	 Asymmetric				
FINISHES	G - Grey B - Black				
LUMEN OUTPUT SOURCE	180lm (3000 K CRI90, 500mA)				
DELIVERED LUMEN OUTPUT	150lm (3000 K CRI90, 500mA, Asy.)				
LED NUMBER	1 power LED				
MATERIAL	body and flange in anodized aluminium				
DRIVER	not included, see pag. 348 and 350				
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable				
ACCESSORIES	outer case - code : SG990				
NOTES	24V version on request				

PLG



Brio square

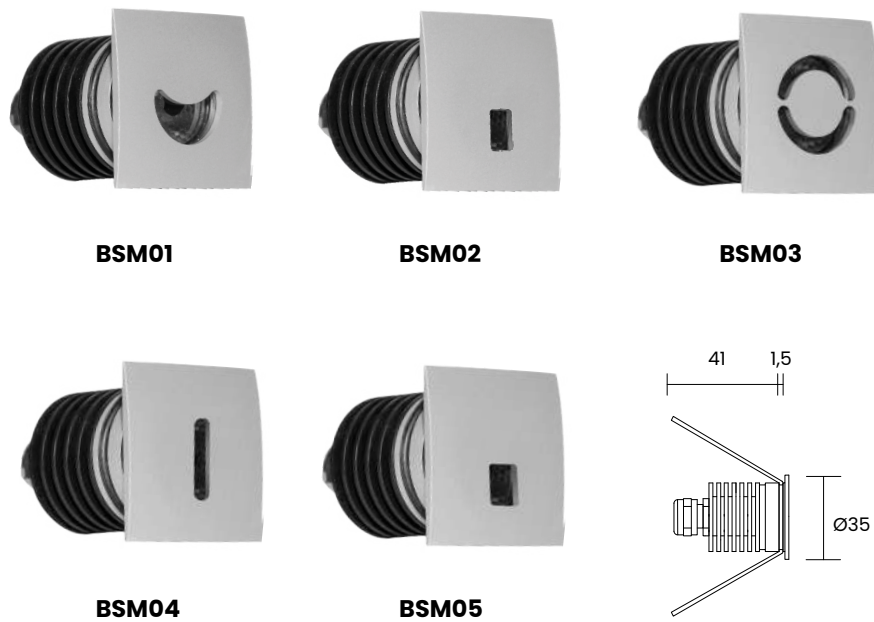

POWER SUPPLY	max 2W - max 500mA
CODE	BSM01 BSM02 BSM03 BSM04 BSM05
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Asymmetric
FINISHES	G - Grey B - Black
LUMEN OUTPUT SOURCE	180lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	150lm (3000 K CRI90, 500mA, Asy.)
LED NUMBER	1 power LED
MATERIAL	body and flange in anodized aluminium
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	24V version on request

PLG



Brio square

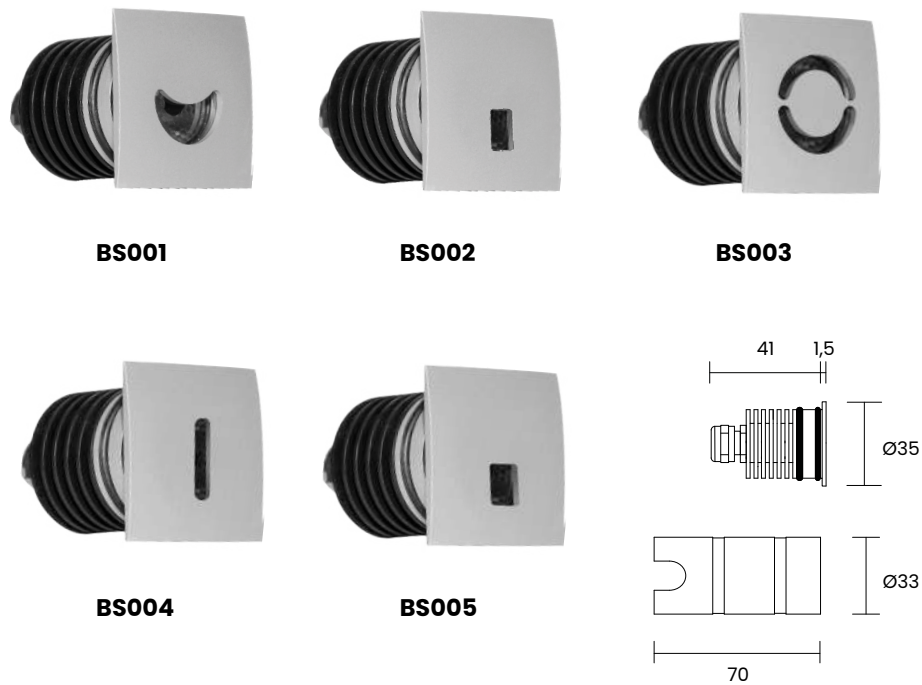

POWER SUPPLY	max 2W - max 500mA
CODE	BS001 BS002 BS003 BS004 BS005
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Asymmetric
FINISHES	G - Grey B - Black
LUMEN OUTPUT SOURCE	180lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	150lm (3000 K CRI90, 500mA, Asy.)
LED NUMBER	1 power LED
MATERIAL	body and flange in anodized aluminium
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	outer case - code : SG990
NOTES	24V version on request

PLG

Brio asy

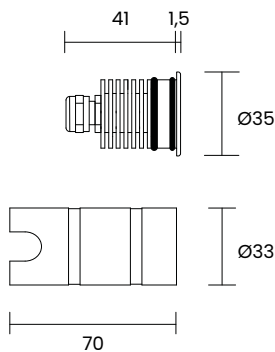



POWER SUPPLY	max 2W - max 500mA
CODE	BRAM01
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K- CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Asymmetric
FINISHES	G - Grey B - Black
LUMEN OUTPUT SOURCE	180lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	150lm (3000 K CRI90, 500mA, Asy.)
LED NUMBER	1 power LED
MATERIAL	body and flange in anodized aluminium
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2x0,50 cable
ACCESSORIES	
NOTES	24V version on request



POWER SUPPLY	max 2W - max 500mA
CODE	BRA01
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K- CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Asymmetric
FINISHES	G - Grey B - Black
LUMEN OUTPUT SOURCE	180lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	150lm (3000 K CRI90, 500mA, Asy.)
LED NUMBER	1 power LED
MATERIAL	body and flange in anodized aluminium
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2x0,50 cable
ACCESSORIES	outer case - code : SG990
NOTES	24V version on request

Wind


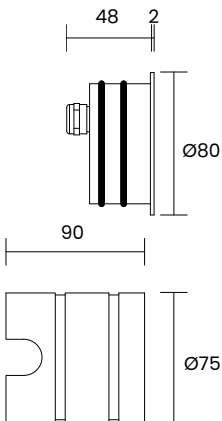


POWER SUPPLY	max 3W - max 700mA
CODE	WD001
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Asymmetric
FINISHES	G - Grey B - Black
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	200lm (3000 K CRI90, 700mA, 15° Asy.)
LED NUMBER	1 power LED
MATERIAL	body and flange in anodized aluminium
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 1,5 mt SUB4 FROST-UV 2x0,50 cable
ACCESSORIES	outer case included
NOTES	24V version on request

Linear Lights




Strip 6

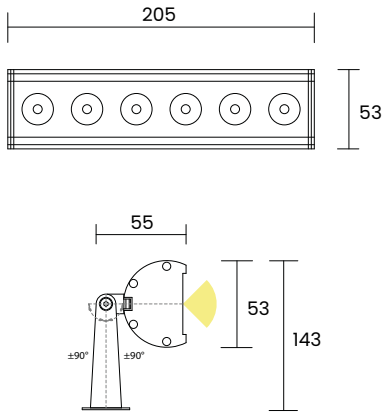

POWER SUPPLY	max 6W - max 350mA
CODE	ST006
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N 10° M 25° W 40° X 60° E 30°x65° T 110°
FINISHES	G - Grey
LUMEN OUTPUT SOURCE	780lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	660lm (3000 K CRI90, 350mA, 40°)
LED NUMBER	6 power LEDs
MATERIAL	body in anodized aluminium
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	24V version on request

PLG


Strip 12

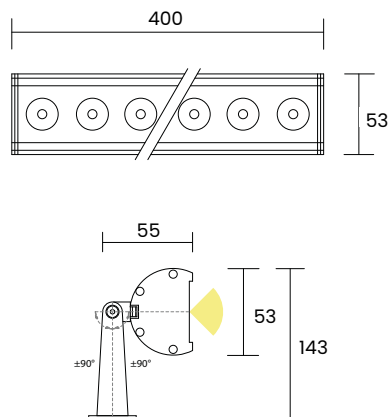

CEIII750grIP65RoHSREPEATABLEA+ A+ A+	
POWER SUPPLY	max 12W - max 350mA
CODE	ST012
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X E T 10°25°40°60°30°x65°110°
FINISHES	G - Grey
LUMEN OUTPUT SOURCE	1560lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	1320lm (3000 K CRI90, 350mA, 40°)
LED NUMBER	12 power LEDs
MATERIAL	body in anodized aluminium
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	24V version on request

PLG


Strip 18

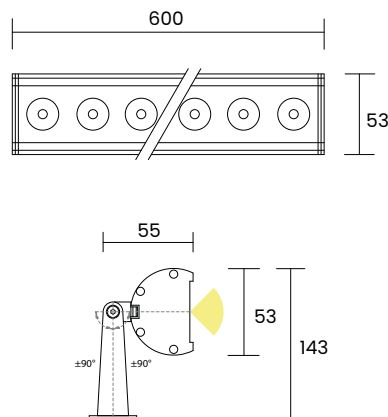

CEIII1050grIP65RoHSREPEATABLEA+ A+ A+	
POWER SUPPLY	max 18W - max 350mA
CODE	ST018
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X E T 10°25°40°60°30°x65°110°
FINISHES	G - Grey
LUMEN OUTPUT SOURCE	2340lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	1980lm (3000 K CRI90, 350mA, 40°)
LED NUMBER	18 power LEDs
MATERIAL	body in anodized aluminium
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	24V version on request

PLG


Strip 24

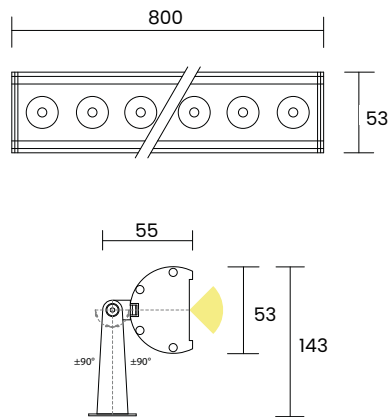

CEIII1350grIP65	
POWER SUPPLY	max 24W - max 350mA
CODE	ST024
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N10°M25°W40°X60°E30°x65°T110°
FINISHES	G - Grey
LUMEN OUTPUT SOURCE	3120lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	2640lm (3000 K CRI90, 350mA, 40°)
LED NUMBER	24 power LEDs
MATERIAL	body in anodized aluminium
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	24V version on request

PLG

Strip 36

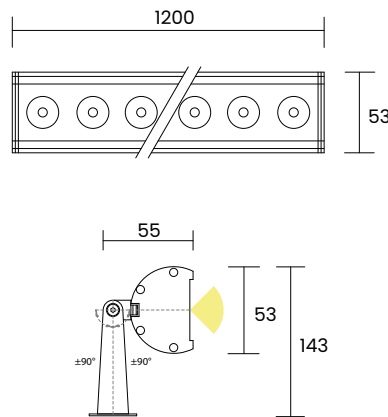


CEIII1950grIP65	
POWER SUPPLY	max 36W - max 350mA
CODE	ST036
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N10°M25°W40°X60°E30°x65°T110°
FINISHES	G - Grey
LUMEN OUTPUT SOURCE	4680lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	3960lm (3000 K CRI90, 350mA, 40°)
LED NUMBER	36 power LEDs
MATERIAL	body in anodized aluminium
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	24V version on request

PLG

Suspended

Datura ceiling




POWER SUPPLY	max 6W - 220V / 240V
CODE	DATC01 
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Diff.
FINISHES	W - White B - Black K - Corten
LENGTH	1 - 350mm 2 - 500mm 3 - 750mm 4 - 1000mm
BASKET TEXTURE	1 - Transparent 2 - Opal
LUMEN OUTPUT SOURCE	840lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	600lm (3000 K CRI90, 350mA, Diff.)
LED NUMBER	1 power LED multichip
MATERIAL	aluminium, brass, borosilicate glass
DRIVER	included
NOTES	other RAL on request, other lenghts on request



POWER SUPPLY	max 6W - 24V
CODE	DATC24 
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Diff.
FINISHES	W - White B - Black K - Corten
LENGTH	1 - 350mm 2 - 500mm 3 - 750mm 4 - 1000mm
BASKET TEXTURE	1 - Transparent 2 - Opal
LUMEN OUTPUT SOURCE	840lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	600lm (3000 K CRI90, 350mA, Diff.)
LED NUMBER	1 power LED multichip
MATERIAL	aluminium, brass, borosilicate glass
DRIVER	not included, see pag. 351
NOTES	other RAL on request, other lenghts on request

Mini glicine ceiling





POWER SUPPLY	max 6W - 220V/240V
CODE	MGCD1 ■ ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Diff.
FINISHES	B - Black K - Corten
STEM LENGTH	1 - 255mm 2 - 500mm 3 - 750mm 4 - 1000mm
LUMEN OUTPUT SOURCE	840lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	600lm (3000 K CRI90, 350mA, Diff.)
LED NUMBER	1 power LED multichip
MATERIAL	Aluminium, brass, steel
DRIVER	included
NOTES	other RAL on request, other lenghts on request



POWER SUPPLY	max 6W - 24V
CODE	MGLC1 ■ ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Diff.
FINISHES	B - Black K - Corten
STEM LENGTH	1 - 255mm 2 - 500mm 3 - 750mm 4 - 1000mm
LUMEN OUTPUT SOURCE	840lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	600lm (3000 K CRI90, 350mA, Diff.)
LED NUMBER	1 power LED multichip
MATERIAL	Aluminium, brass, steel
DRIVER	not included, see pag. 351
NOTES	other RAL on request, other lenghts on request


PLG

Glicine ceiling

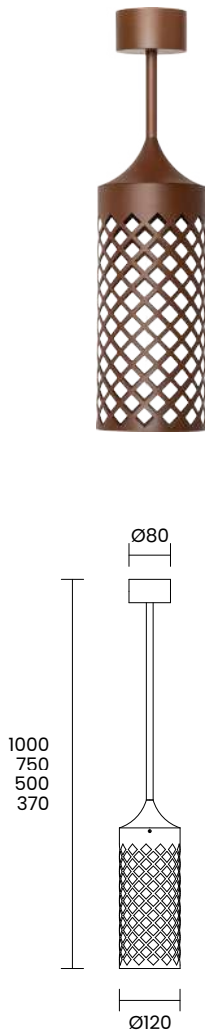


POWER SUPPLY	max 9W - 220V / 240V
CODE	GLC01 ■ ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Diff.
FINISHES	B - Black K - Corten
LENGTH	1 - 370mm 2 - 500mm 3 - 750mm 4 - 1000mm
BASKET TEXTURE	1 - Lotus 2 - Jasmine
LUMEN OUTPUT SOURCE	1260lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	600lm (3000 K CRI90, 500mA, Diff.)
LED NUMBER	1 power LED multichip
MATERIAL	Aluminium, Steel, Brass
DRIVER	Included
NOTES	other RAL on request, other lenghts on request

PLG

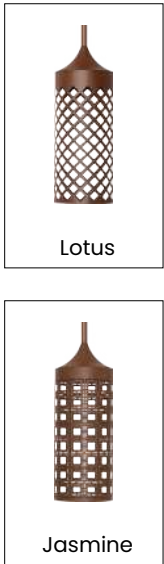

229


Iris suspended



POWER SUPPLY	max 5W - 220V / 240V
CODE	IRS01 ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	■ ■ ■ ■ 20° 30° 40° 60°
FINISHES	W - White B - Black K - Corten
LUMEN OUTPUT SOURCE	570lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	420lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	head and base in painted aluminium
DRIVER	included
POWER CABLE	2 mt SUB4 FROST-UV 2x0,50 cable
NOTES	other RAL on request

PLG


Iris ceiling

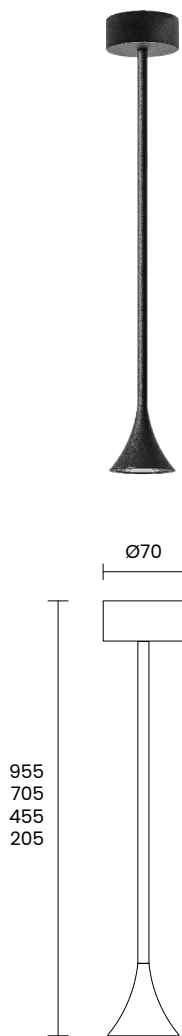

POWER SUPPLY	max 5W - 220V / 240V
CODE	IRC01 ■ ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	■ ■ ■ ■ 20° 30° 40° 60°
FINISHES	W - White B - Black K - Corten
STEM LENGTH	1 - 205mm 2 - 455mm 3 - 705mm 4 - 955mm
LUMEN OUTPUT SOURCE	570lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	420lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	head and base in painted aluminium, stem in painted brass
DRIVER	included
NOTES	other RAL on request, other lengths on request

PLG


Calla suspended



POWER SUPPLY	max 9W - 220V/240V
CODE	CAS01 ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	■ ■ ■ ■ 20° 30° 40° 60°
FINISHES	W - White B - Black K - Corten
LUMEN OUTPUT SOURCE	1200lm (3000 K CRI90, 250mA)
DELIVERED LUMEN OUTPUT	1010lm (3000 K CRI90, 250mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	head and base in painted aluminium, stem in painted brass
DRIVER	included
POWER CABLE	2 mt SUB4 FROST-UV 2x0,50 cable
NOTES	other RAL on request

PLG

Calla ceiling

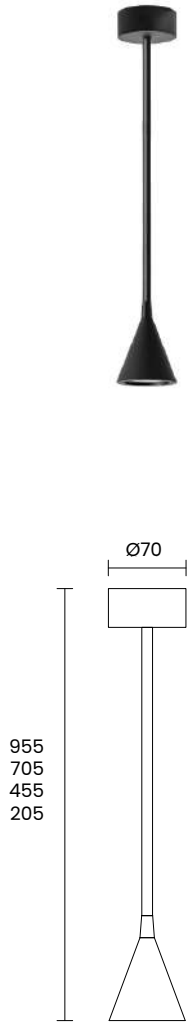

POWER SUPPLY	max 9W - 220V/240V
CODE	CAC01 ■ ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	■ ■ ■ ■ 20° 30° 40° 60°
FINISHES	W - White B - Black K - Corten
STEM LENGTH	1 - 205mm 2 - 455mm 3 - 705mm 4 - 955mm
LUMEN OUTPUT SOURCE	1200lm (3000 K CRI90, 250mA)
DELIVERED LUMEN OUTPUT	1010lm (3000 K CRI90, 250mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	head and base in painted aluminium, stem in painted brass
DRIVER	included
NOTES	other RAL on request, other lenghts on request

PLG

Lilium suspended




CE IP65 A A+ A++

POWER SUPPLY	max 12W - 220V/240V
CODE	LIS01 ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W D 15° 25° 40° Diff.
FINISHES	W - White B - Black K - Corten
LUMEN OUTPUT SOURCE	1730lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	1290lm (3000 K CRI90, 350mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	head and base in painted aluminium, stem in painted brass
DRIVER	included
POWER CABLE	2 mt SUB4 FROST-UV 2x0,50 cable
NOTES	other RAL on request

PLG

Lilium ceiling

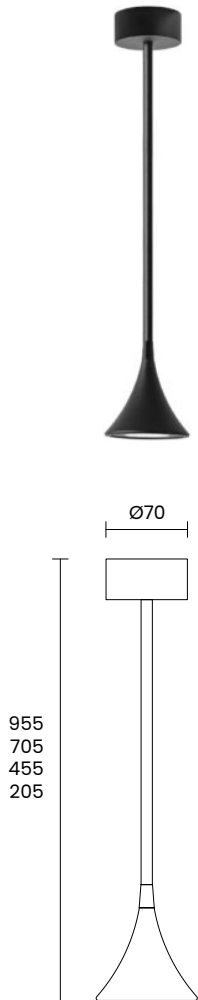

CE IP65 A A+ A++


POWER SUPPLY	max 12W - 220V/240V
CODE	LIC01 ■ ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W D 15° 25° 40° Diff.
FINISHES	W - White B - Black K - Corten
STEM LENGTH	1 - 205mm 2 - 455mm 3 - 705mm 4 - 955mm
LUMEN OUTPUT SOURCE	1730lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	1290lm (3000 K CRI90, 350mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	head and base in painted aluminium, stem in painted brass
DRIVER	included
POWER CABLE	2 mt SUB4 FROST-UV 2x0,50 cable
NOTES	other RAL on request, other lenghts on request

PLG

235

Wall Surface

Datura wall

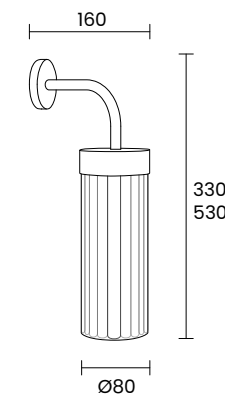

Trasparent



Opal




POWER SUPPLY	max 6W - 350mA
CODE	DATW01 ■ ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	D Diff.
FINISHES	W - White B - Black K - Corten
LENGTH	1 - 330mm 2 - 530mm
BASKET TEXTURE	1 - Trasparent 2 - Opal
LUMEN OUTPUT SOURCE	840lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	600lm (3000 K CRI90, 350mA, Diff.)
LED NUMBER	1 power LED multichip
MATERIAL	Aluminium, brass, borosilicate glass
DRIVER	not included, see pag. 347 and 350
NOTES	other RAL on request, other lenghts on request 24V version on request

PLG




Datura hook



POWER SUPPLY	max 6W - 350mA
CODE	DATH01 ■ ■ ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Diff.
FINISHES	W - White B - Black K - Corten
BASKET TEXTURE	1 - Trasparent 2 - Opal
LUMEN OUTPUT SOURCE	840lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	600lm (3000 K CRI90, 350mA, Diff.)
LED NUMBER	1 power LED multichip
MATERIAL	Aluminium, brass, borosilicate
DRIVER	not included, see pag. 347 and 350
NOTES	other RAL on request, other lenghts on request 24V version on request

PLG



Datura applique



POWER SUPPLY	max 6W - 350mA
CODE	DATP01 ■ ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Diff.
FINISHES	W - White B - Black K - Corten
BASKET TEXTURE	1 - Trasparent 2 - Opal
LUMEN OUTPUT SOURCE	840lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	600lm (3000 K CRI90, 350mA, Diff.)
LED NUMBER	1 power LED multichip
MATERIAL	aluminium, brass, borosilicate glass
DRIVER	not included, see pag. 347 and 350
NOTES	other RAL on request, other lenghts on request 24V version on request

PLG

Mini glicine wall

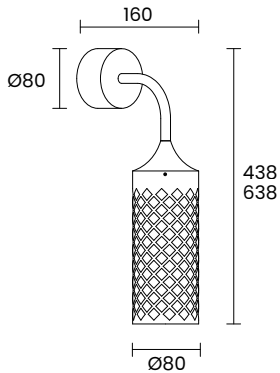


POWER SUPPLY	max 6W - 220V/240V
CODE	MGWD1 ■ ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Diff.
FINISHES	B - Black K - Corten
STEM LENGTH	1 - 330mm 2 - 530mm
LUMEN OUTPUT SOURCE	840lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	600lm (3000 K CRI90, 350mA, Diff.)
LED NUMBER	1 power LED multichip
MATERIAL	Aluminium, Steel, Brass
DRIVER	included
NOTES	other RAL on request, other lenghts on request

PLG



POWER SUPPLY	max 6W - 24V
CODE	MGLW1 ■ ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Diff.
FINISHES	B - Black K - Corten
STEM LENGTH	1 - 330mm 2 - 530mm
LUMEN OUTPUT SOURCE	840lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	600lm (3000 K CRI90, 350mA, Diff.)
LED NUMBER	1 power LED multichip
MATERIAL	Aluminium, Steel, Brass
DRIVER	not included, see pag. 351
NOTES	other RAL on request, other lenghts on request



Mini glicine hook

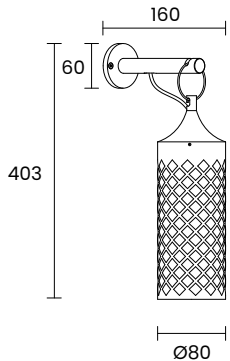

POWER SUPPLY	max 6W - 24V		
CODE	MGLH1		
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K		
OPTICS	D Diff.		
FINISHES	B - Black K - Corten		
LUMEN OUTPUT SOURCE	840lm (3000 K CRI90, 350mA)		
DELIVERED LUMEN OUTPUT	600lm (3000 K CRI90, 350mA, Diff.)		
LED NUMBER	1 power LED multichip		
MATERIAL	Aluminium, Steel, Brass		
DRIVER	not included, see pag. 351		
POWER CABLE	includes 3 mt Sub4 FROST-UV 2 x 0,50 cable		
NOTES	other RAL on request, other lenghts on request		


PLG

Glicine wall

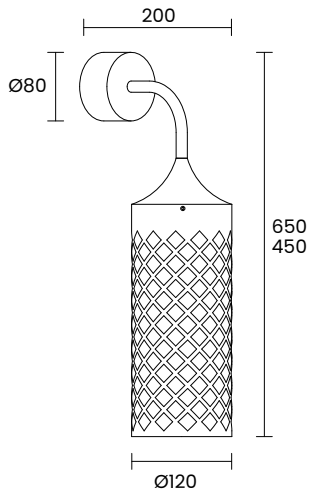


POWER SUPPLY	max 9W - 220V / 240V		
CODE	GLW01		
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K		
OPTICS	D Diff.		
FINISHES	B - Black K - Corten		
LENGTH	1 - 450mm 2 - 650mm		
BASKET TEXTURE	1 - Lotus 2 - Jasmine		
LUMEN OUTPUT SOURCE	1260lm (3000 K CRI90, 500mA)		
DELIVERED LUMEN OUTPUT	600lm (3000 K CRI90, 500mA, Diff.)		
LED NUMBER	1 power LED multichip		
MATERIAL	Aluminium, Steel, Brass		
DRIVER	Included		
NOTES	other RAL on request, other lenghts on request		

PLG

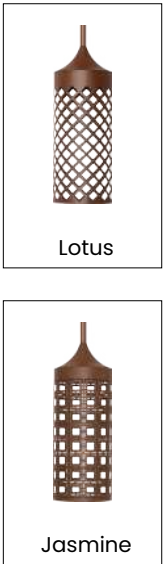

Glicine hook

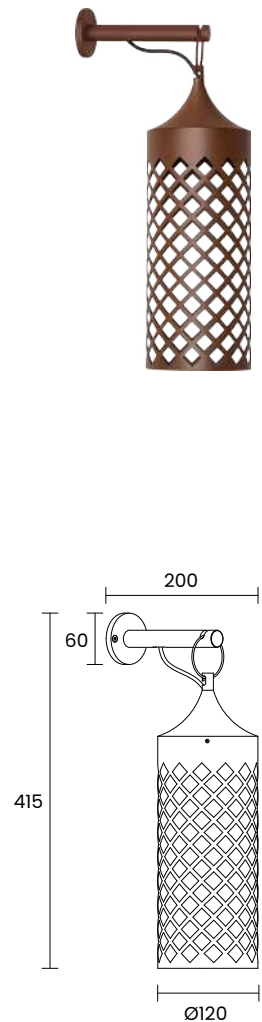

Lotus





Jasmine



POWER SUPPLY	max 9W - 24V
CODE	GLH01
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Diff.
FINISHES	B - Black K - Corten
BASKET TEXTURE	1 - Lotus 2 - Jasmine
LUMEN OUTPUT SOURCE	1260lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	600lm (3000 K CRI90, 500mA, Diff.)
LED NUMBER	1 power LED multichip
MATERIAL	Aluminium, Steel, Brass
DRIVER	not included, see pag. 351
POWER CABLE	includes 3 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	other RAL on request, other lenghts on request

PLG


Iris wall

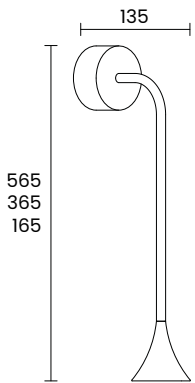

POWER SUPPLY	max 5W - 220V / 240V
CODE	IRW01
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 20° 30° 40° 60°
FINISHES	W - White B - Black K - Corten
STEM LENGTH	1 - 165mm 2 - 365mm 3 - 565mm
LUMEN OUTPUT SOURCE	570lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	420lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	head and base in painted aluminium, stem in painted brass
DRIVER	included
NOTES	other RAL on request, other lenghts on request

PLG


Calla wall

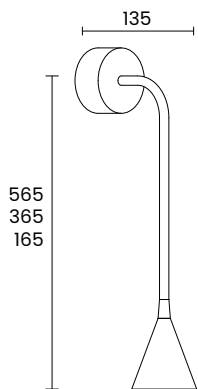

CE  IP65  A++	
POWER SUPPLY	max 9W - 220V / 240V
CODE	CAW01 ■ ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X 20°30°40°60°
FINISHES	W - White B - Black K - Corten
STEM LENGTH	1 - 165mm 2 - 365mm 3 - 565mm
LUMEN OUTPUT SOURCE	1200lm (3000 K CRI90, 250mA)
DELIVERED LUMEN OUTPUT	1010lm (3000 K CRI90, 250mA, 36°)
LED NUMBER	1 power LED multichip
MATERIAL	head and base in painted aluminium, stem in painted brass
DRIVER	included
NOTES	other RAL on request, other lenghts on request


PLG

Lilium wall

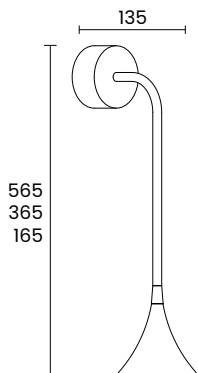


CE  IP65  A++	
POWER SUPPLY	max 12W - 220V / 240V
CODE	LIW01 ■ ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W D 15°25°40°Diff.
FINISHES	W - White B - Black K - Corten
STEM LENGTH	1 - 165mm 2 - 365mm 3 - 565mm
LUMEN OUTPUT SOURCE	1730lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	1290lm (3000 K CRI90, 350mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	head and base in painted aluminium, stem in painted brass
DRIVER	included
NOTES	other RAL on request, other lenghts on request

PLG

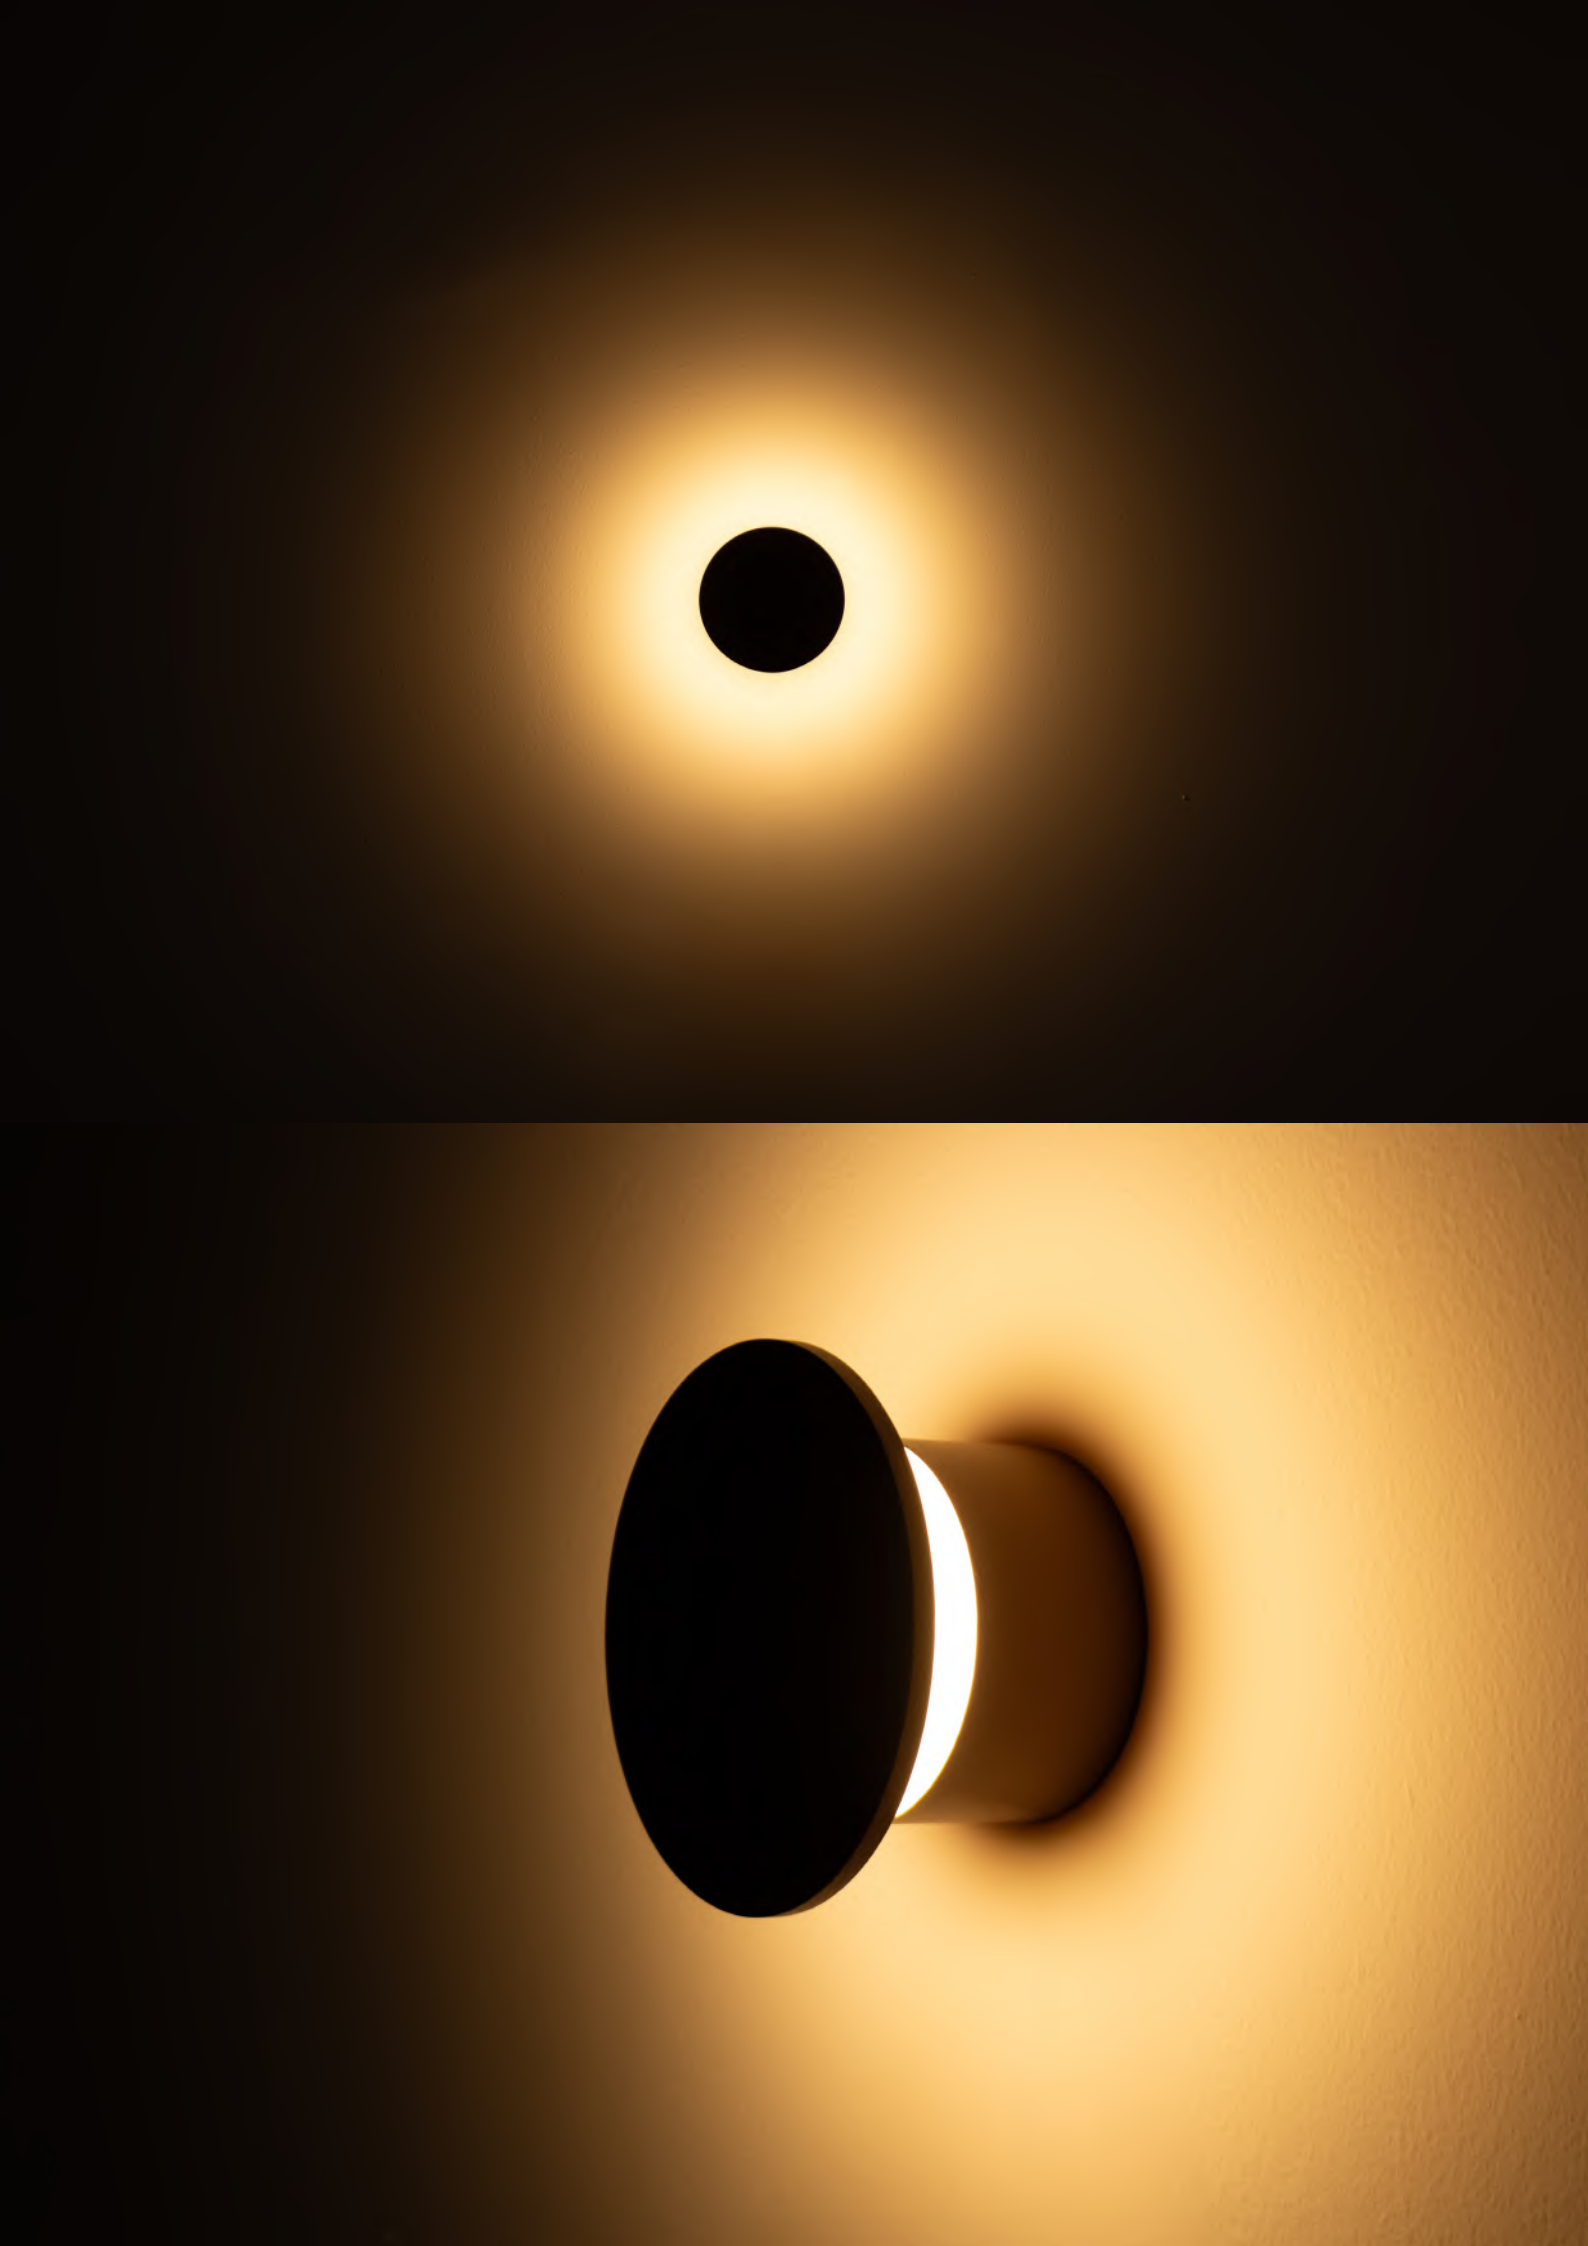

Halo

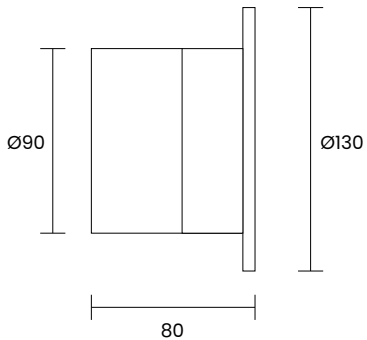



CE   IP65  770gr 	
POWER SUPPLY	max 9W - 220V / 240V
CODE	HAL01   
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K- CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Diff.
FINISHES	W - White G - Grey B - Black K - Corten
LUMEN OUTPUT SOURCE	1200lm (3000 K CRI90)
DELIVERED LUMEN OUTPUT	330lm (3000 K CRI90)
LED NUMBER	1 power LED multichip
MATERIAL	painted aluminium
DRIVER	included
POWER CABLE	
NOTES	

CE   IP65  770gr 	
POWER SUPPLY	max 9W - 24V
CODE	HAL02   
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K- CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Diff.
FINISHES	W - White G - Grey B - Black K - Corten
LUMEN OUTPUT SOURCE	1200lm (3000 K CRI90)
DELIVERED LUMEN OUTPUT	330lm (3000 K CRI90)
LED NUMBER	1 power LED multichip
MATERIAL	painted aluminium
DRIVER	not included, see pag. 351
POWER CABLE	includes 0,5 mt FEP 2x0,50 cable
NOTES	

PLG

Garden lights


Petunia

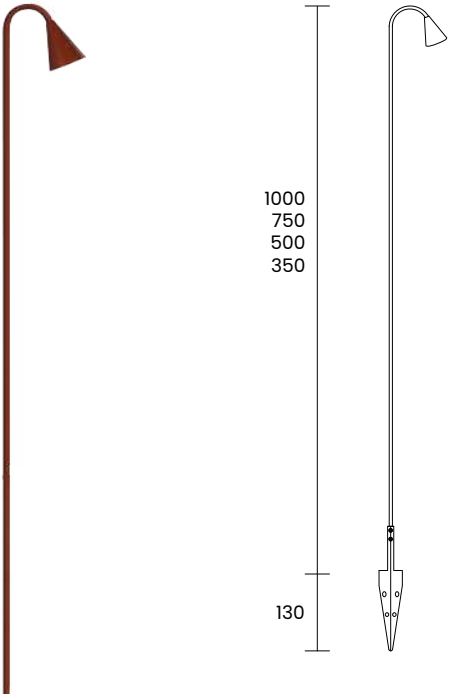

POWER SUPPLY	max 3W - max 700mA
CODE	PTN01    
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 10°  25°  40°  60°  110°
FINISHES	G - Grey B - Black K - Corten
STEM LENGTH	1 - 350mm 2 - 500mm 3 - 750mm 4 - 1000mm
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	215lm (3000 K CRI90, 700mA, 40°)
LED NUMBER	1 power LED
MATERIAL	head in painted aluminium, stem in painted brass, inox AISI 316L stake
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	other RAL on request, other lenghts on request 24V version on request

PLG


Flowerbell

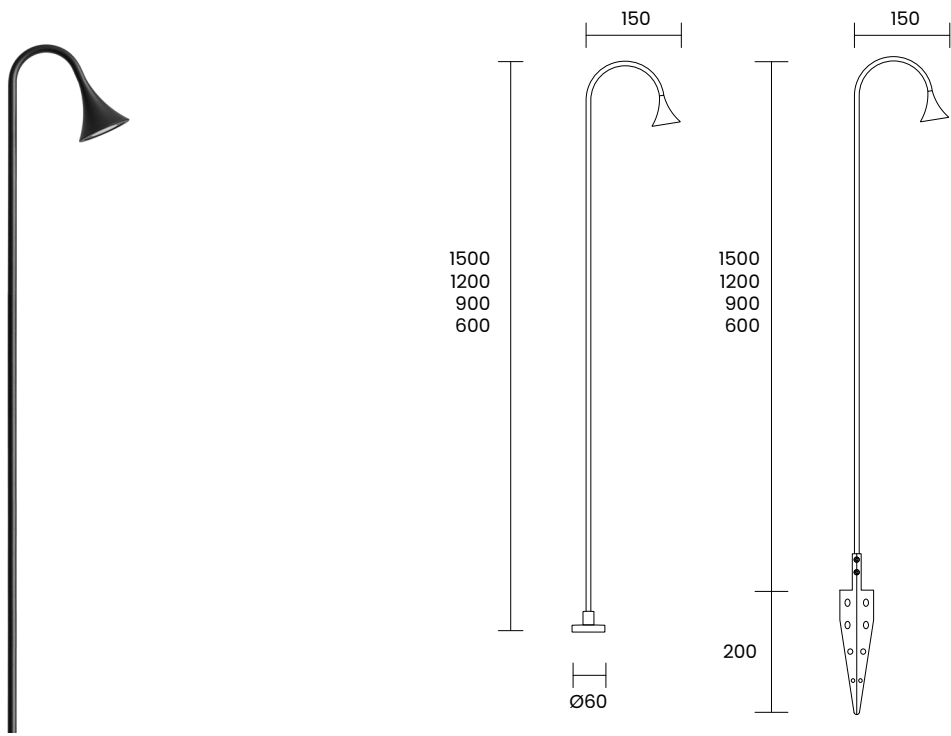

CE III 500gr IP65 A A+ A++	
POWER SUPPLY	max 3W - max 700mA
CODE	FLB01 with base FLB02 with stake
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N 10° M 25° W 40° X 60° T 110°
FINISHES	G - Grey B - Black K - Corten
STEM LENGTH	1 - 600mm 2 - 900mm 3 - 1200mm 4 - 1500mm
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	2150lm (3000 K CRI90, 700mA, 40°)
LED NUMBER	1 power LED
MATERIAL	head in painted aluminium, stem in painted brass, inox AISI 316L stake
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	other RAL on request, other lenghts on request 24V version on request

PLG

Flowerbell bc

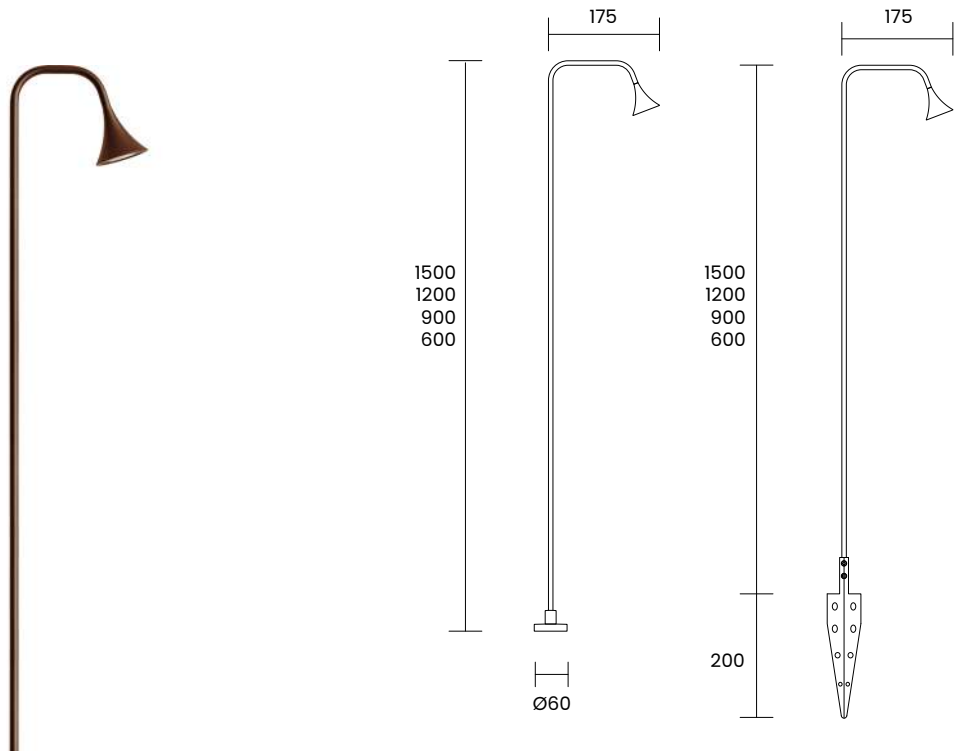


CE III 500gr IP65 A A+ A++	
POWER SUPPLY	max 3W - max 700mA
CODE	FLBC01 with base FLBC02 with stake
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N 10° M 25° W 40° X 60° T 110°
FINISHES	G - Grey B - Black K - Corten
STEM LENGTH	1 - 600mm 2 - 900mm 3 - 1200mm 4 - 1500mm
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	215lm (3000 K CRI90, 700mA, 40°)
LED NUMBER	1 power LED
MATERIAL	head in painted aluminium, stem in painted brass, inox AISI 316L stake
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	other RAL on request, other lenghts on request 24V version on request

PLG



Flowerbell arco


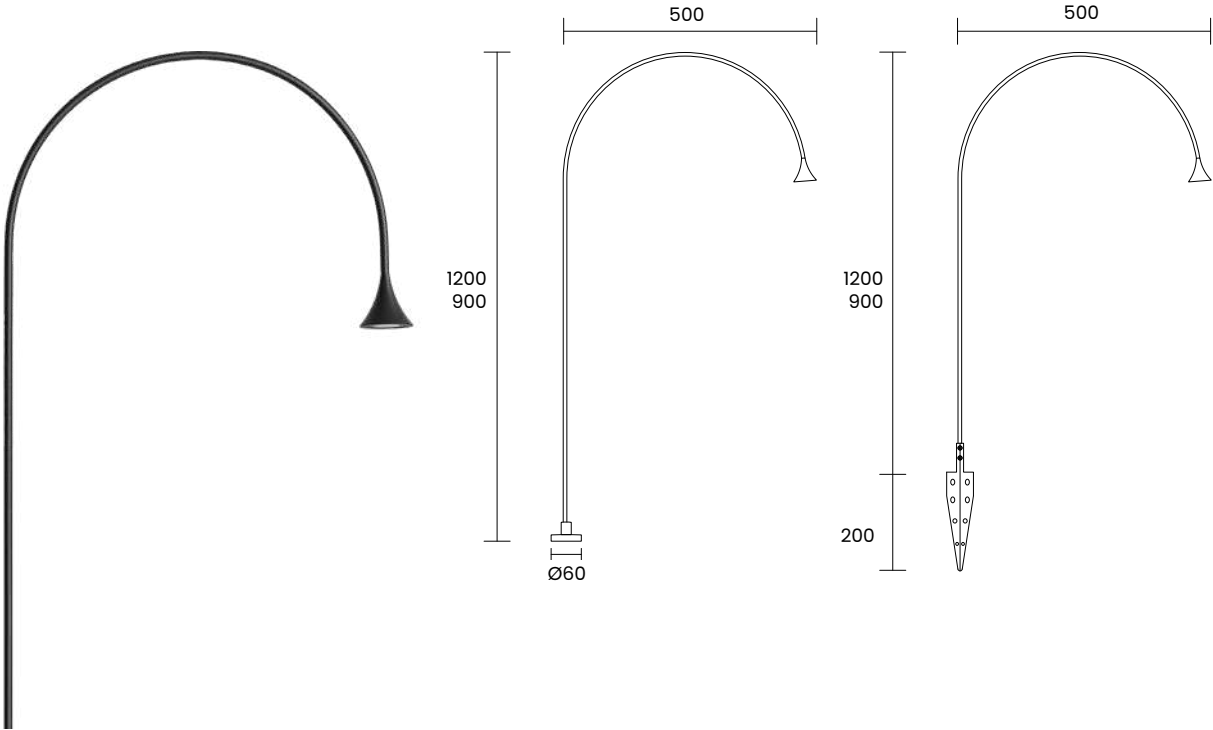


CE III 500gr IP65 500gr

POWER SUPPLY	max 3W - max 700mA		
CODE	FBA01	with base	
	FBA02	with stake	
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K		
OPTICS	N 10° M 25° W 40° X 60° T 110°		
FINISHES	G - Grey B - Black K - Corten		
STEM LENGTH	1 - 900mm 2 - 1200mm		
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)		
DELIVERED LUMEN OUTPUT	215lm (3000 K CRI90, 700mA, 40°)		
LED NUMBER	1 power LED		
MATERIAL	head in painted aluminium, stem in painted brass, inox AISI 316L stake		
DRIVER	not included, see pag. 349 and 350		
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable		
NOTES	other RAL on request, other lenghts on request 24V version on request		





Pipa

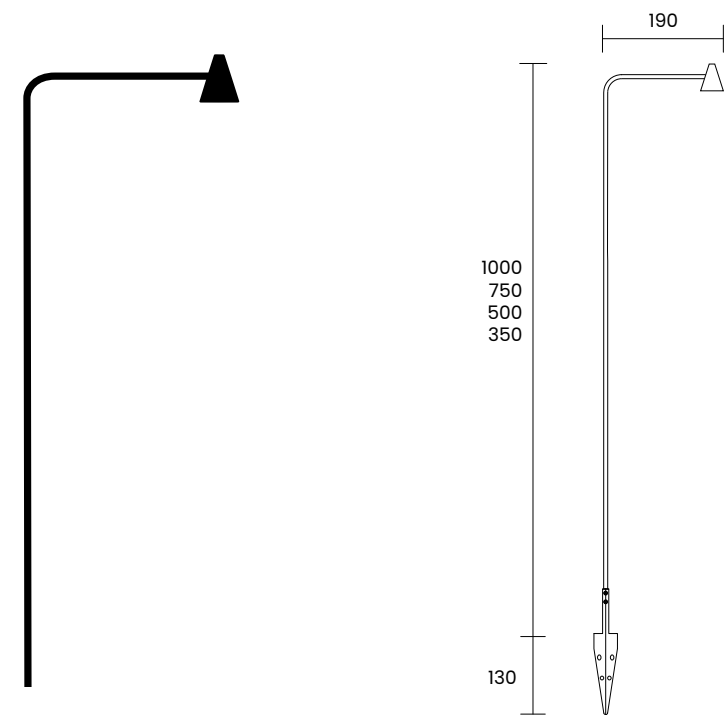

CE	III	500gr	IP65						
POWER SUPPLY		max 3W - max 700mA							
CODE		PIP01							
LED COLOUR		X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K							
OPTICS		110°							
FINISHES		G - Grey B - Black K - Corten							
STEM LENGTH		1 - 350mm 2 - 500mm 3 - 750mm 4 - 1000mm							
LUMEN OUTPUT SOURCE		230lm (3000 K CRI90, 700mA)							
DELIVERED LUMEN OUTPUT		215lm (3000 K CRI90, 700mA, 110°)							
LED NUMBER		1 power LED							
MATERIAL		head in painted aluminium, stem in painted brass, inox AISI 316L stake							
DRIVER		not included, see pag. 349 and 350							
POWER CABLE		includes 2 mt Sub4 FROST-UV 2 x 0,50 cable							
NOTES		other RAL on request, other lenghts on request 24V version on request							

PLG



Iris

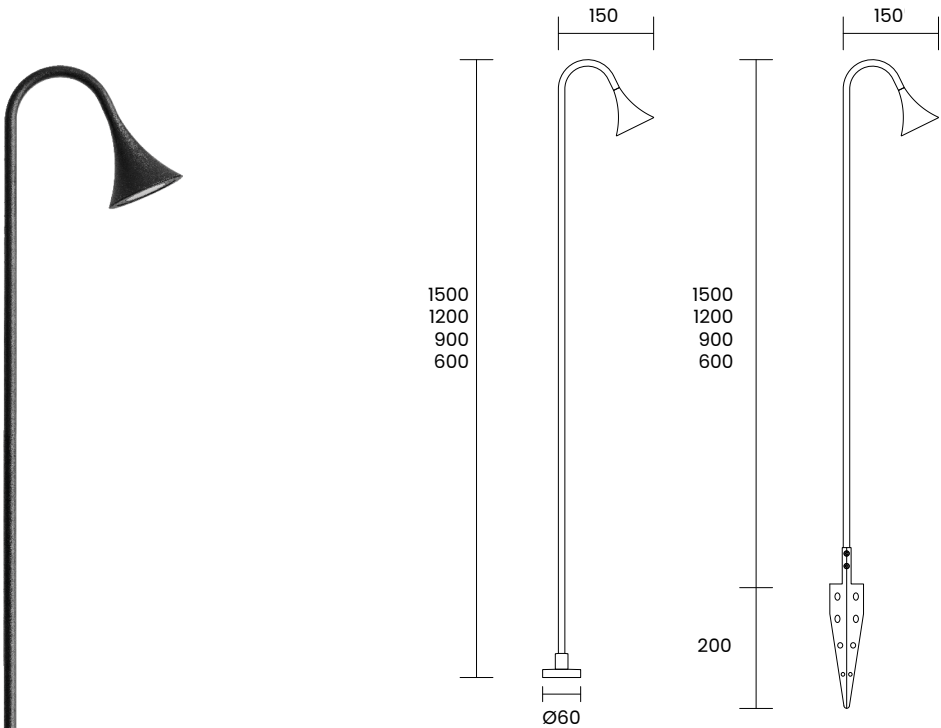


POWER SUPPLY	max 5W - max 500mA
CODE	IRB01  with base IRB02  with stake
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 20° 30° 40° 60°
FINISHES	G - Grey B - Black K - Corten
STEM LENGTH	1 - 600mm 2 - 900mm 3 - 1200mm 4 - 1500mm
LUMEN OUTPUT SOURCE	570lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	420lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	head and base in painted aluminium, stem in painted brass, inox AISI 316L stake
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	outer case - code : IR990
NOTES	other RAL on request, other lenghts on request 24V version on request

PLG


Iris bc

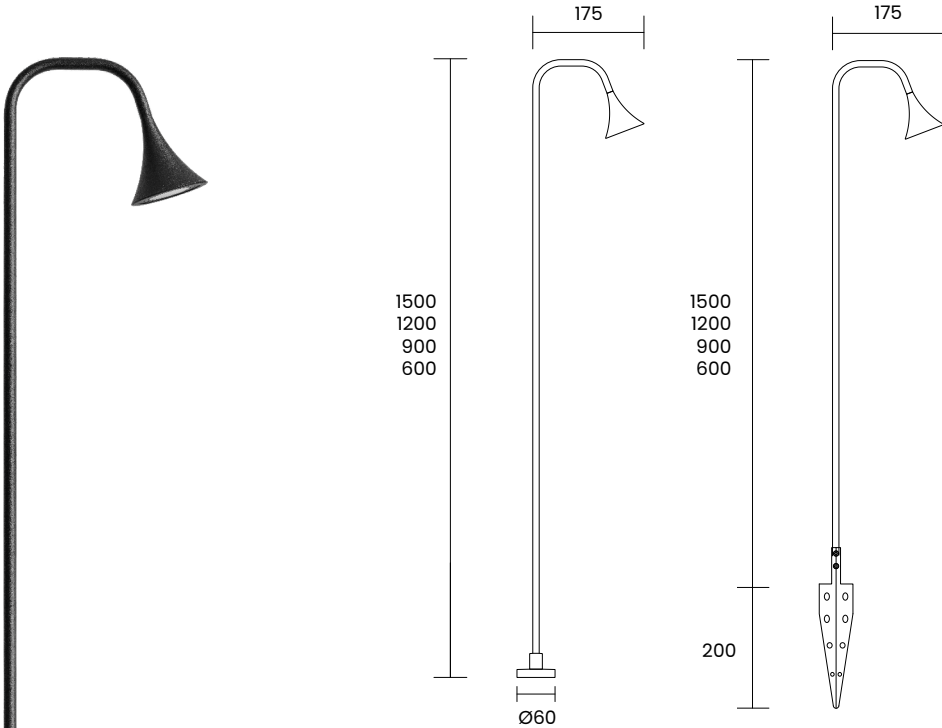

POWER SUPPLY	max 5W - max 500mA
CODE	IBC01  with base IBC02  with stake
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 20° 30° 40° 60°
FINISHES	G - Grey B - Black K - Corten
STEM LENGTH	1 - 600mm 2 - 900mm 3 - 1200mm 4 - 1500mm
LUMEN OUTPUT SOURCE	570lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	420lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	head and base in painted aluminium, stem in painted brass, inox AISI 316L stake
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	outer case - code : IR990
NOTES	other RAL on request, other lenghts on request 24V version on request

PLG



Iris arco

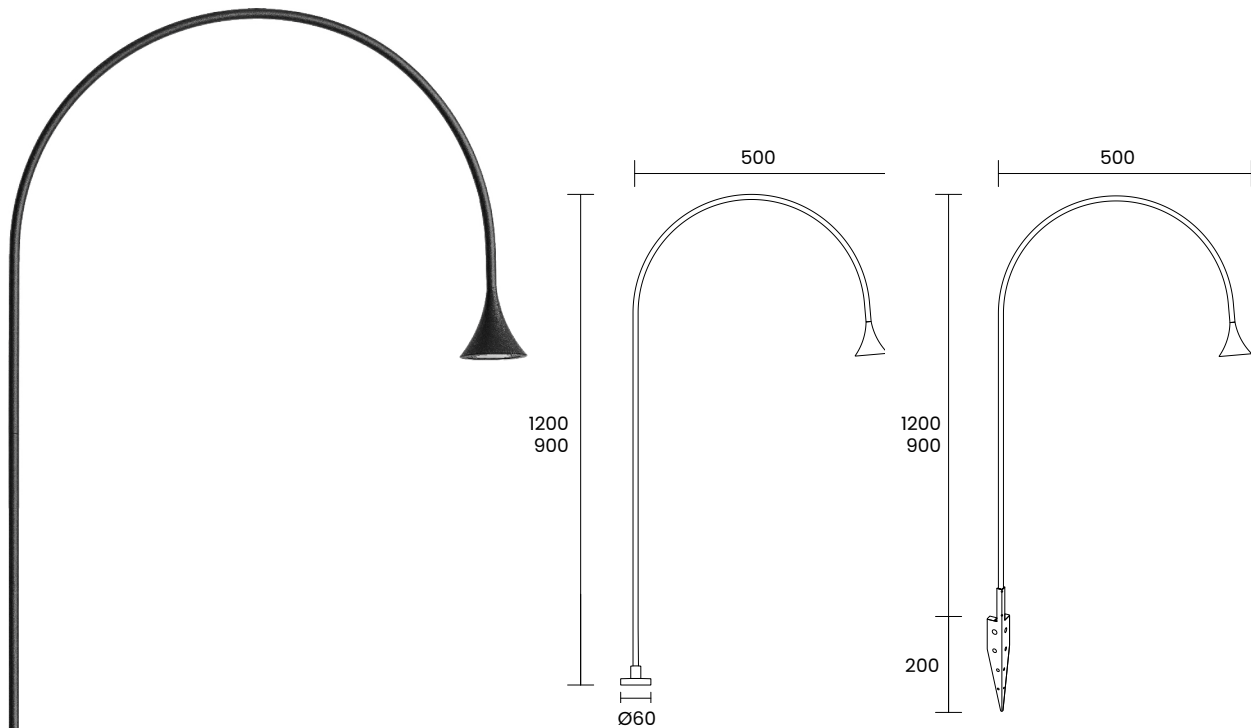

POWER SUPPLY	max 5W - max 500mA
CODE	IRA01 ■ ■ ■ ■ with base IRA02 ■ ■ ■ ■ with stake
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X 20°30°40°60°
FINISHES	G - Grey B - Black K - Corten
STEM LENGTH	1 - 900mm 2 - 1200mm
LUMEN OUTPUT SOURCE	570lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	420lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	head and base in painted aluminium, stem in painted brass, inox AISI 316L stake
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	outer case - code : IR990
NOTES	other RAL on request, other lenghts on request 24V version on request

PLG


Calla

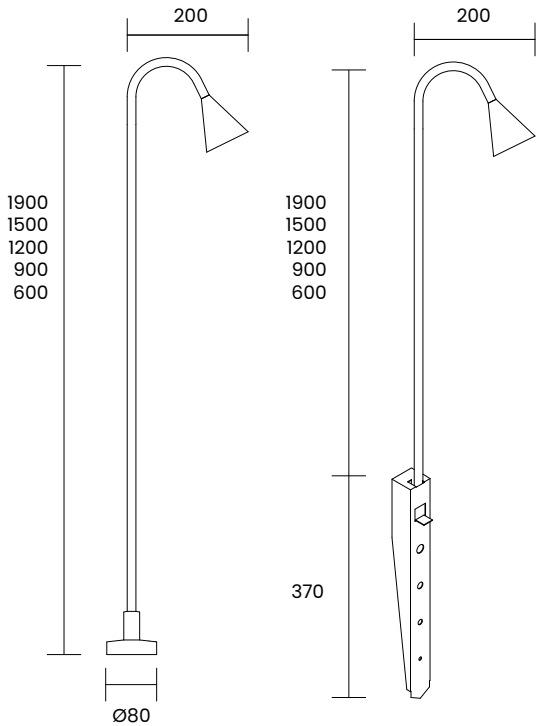

POWER SUPPLY	max 9W - max 250mA
CODE	CAB01 ■ ■ ■ ■ with base CAB02 ■ ■ ■ ■ with stake
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X 20°30°40°60°
FINISHES	G - Grey B - Black K - Corten
STEM LENGTH	1 - 600mm 2 - 900mm 3 - 1200mm 4 - 1500mm 5 - 1900mm
LUMEN OUTPUT SOURCE	1200lm (3000 K CRI90, 250mA)
DELIVERED LUMEN OUTPUT	1010lm (3000 K CRI90, 250mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	head and base in painted aluminium, stem in painted brass, inox AISI 316L stake
DRIVER	not included, see pag. 346 and 350
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	outer case - code : JC990
NOTES	other RAL on request, other lenghts on request 24V version on request

PLG



Calla bc

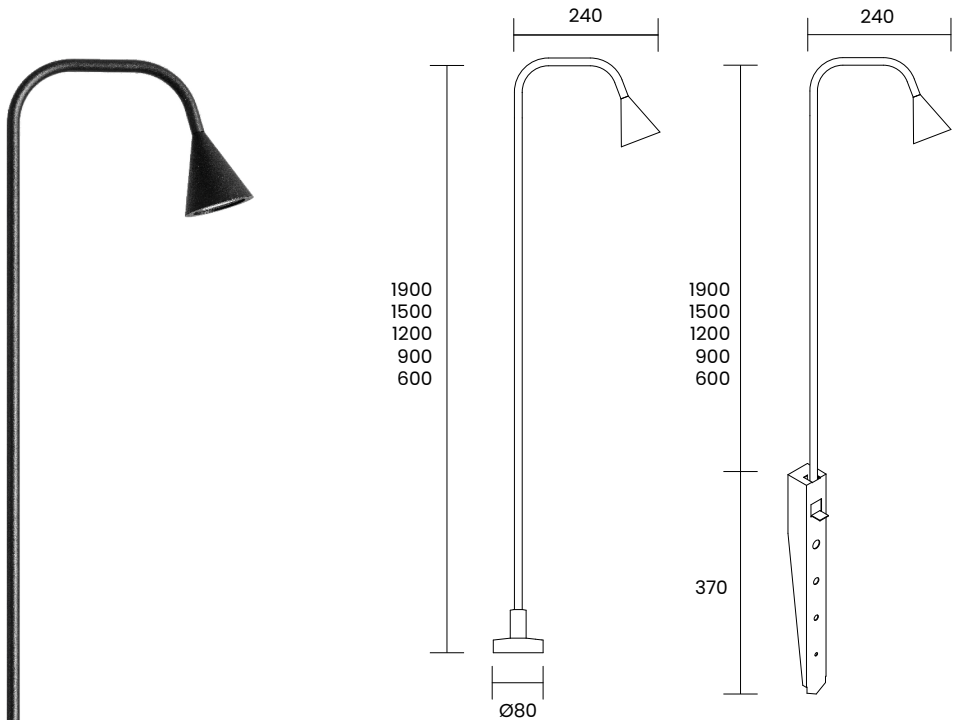

POWER SUPPLY	max 9W - max 250mA		
CODE	CBC01		with base
	CBC02		with stake
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K		
OPTICS	N M W X 20° 30° 40° 60°		
FINISHES	G - Grey B - Black K - Corten		
STEM LENGTH	1 - 600mm 2 - 900mm 3 - 1200mm 4 - 1500mm 5 - 1900mm		
LUMEN OUTPUT SOURCE	1200lm (3000 K CRI90, 250mA)		
DELIVERED LUMEN OUTPUT	1010lm (3000 K CRI90, 250mA, 40°)		
LED NUMBER	1 power LED multichip		
MATERIAL	head and base in painted aluminium, stem in painted brass, inox AISI 316L stake		
DRIVER	not included, see pag. 346 and 350		
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable		
ACCESSORIES	outer case - code : JC990		
NOTES	other RAL on request, other lenghts on request 24V version on request		

PLG


Calla arco

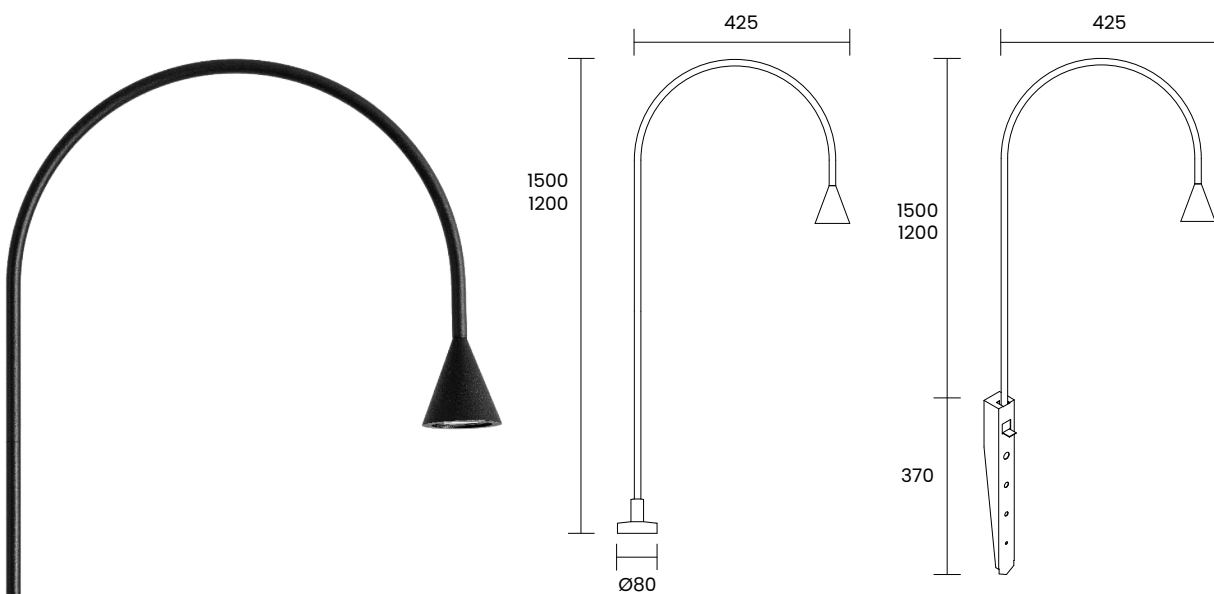

POWER SUPPLY	max 9W - max 250mA		
CODE	CAA01		with base
	CAA02		with stake
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K		
OPTICS	N M W X 20° 30° 40° 60°		
FINISHES	G - Grey B - Black K - Corten		
STEM LENGTH	1 - 1200mm 2 - 1500mm		
LUMEN OUTPUT SOURCE	1200lm (3000 K CRI90, 250mA)		
DELIVERED LUMEN OUTPUT	1010lm (3000 K CRI90, 250mA, 36°)		
LED NUMBER	1 power LED multichip		
MATERIAL	head and base in painted aluminium, stem in painted brass, inox AISI 316L stake		
DRIVER	not included, see pag. 346 and 350		
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable		
ACCESSORIES	outer case - code : JC990		
NOTES	other RAL on request, other lenghts on request 24V version on request		

PLG



Lilium

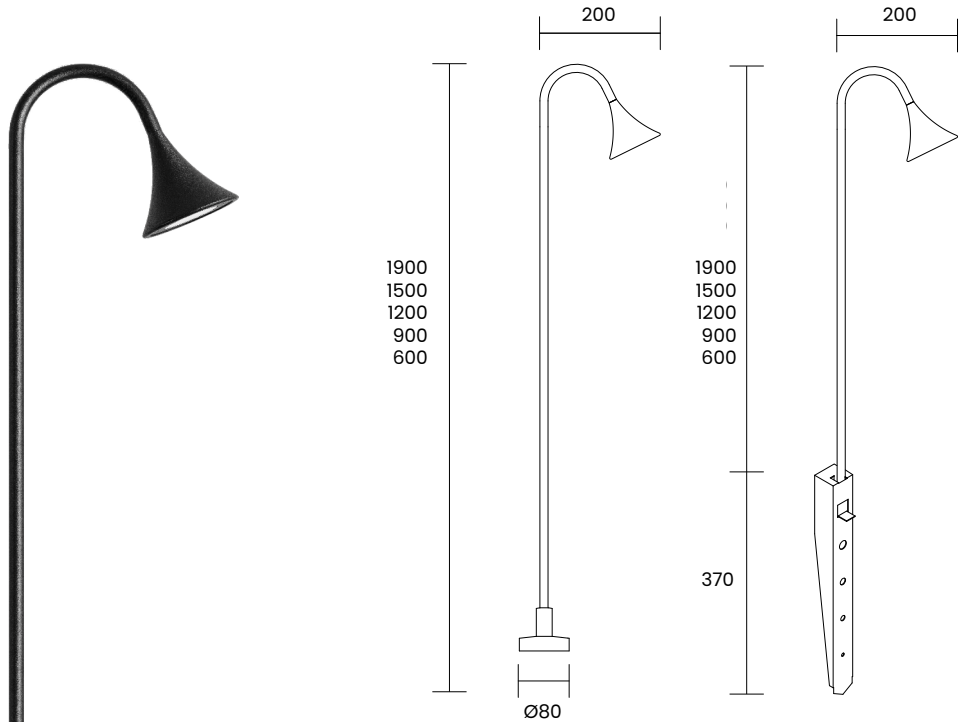

POWER SUPPLY	max 12W - max 350mA		
CODE	LIB01		with base
	LIB02		with stake
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K		
OPTICS	N M W D 15° 25° 40° Diff.		
FINISHES	G - Grey B - Black K - Corten		
STEM LENGTH	1 - 600mm 2 - 900mm 3 - 1200mm 4 - 1500mm 5 - 1900mm		
LUMEN OUTPUT SOURCE	1730lm (3000 K CRI90, 350mA)		
DELIVERED LUMEN OUTPUT	1290lm (3000 K CRI90, 350mA, 40°)		
LED NUMBER	1 power LED multichip		
MATERIAL	head and base in painted aluminium, stem in painted brass, inox AISI 316L stake		
DRIVER	not included, see pag. 347 and 350		
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable		
ACCESSORIES	outer case - code : JC990		
NOTES	other RAL on request, other lenghts on request 24V version on request		

PLG


Lilium bc

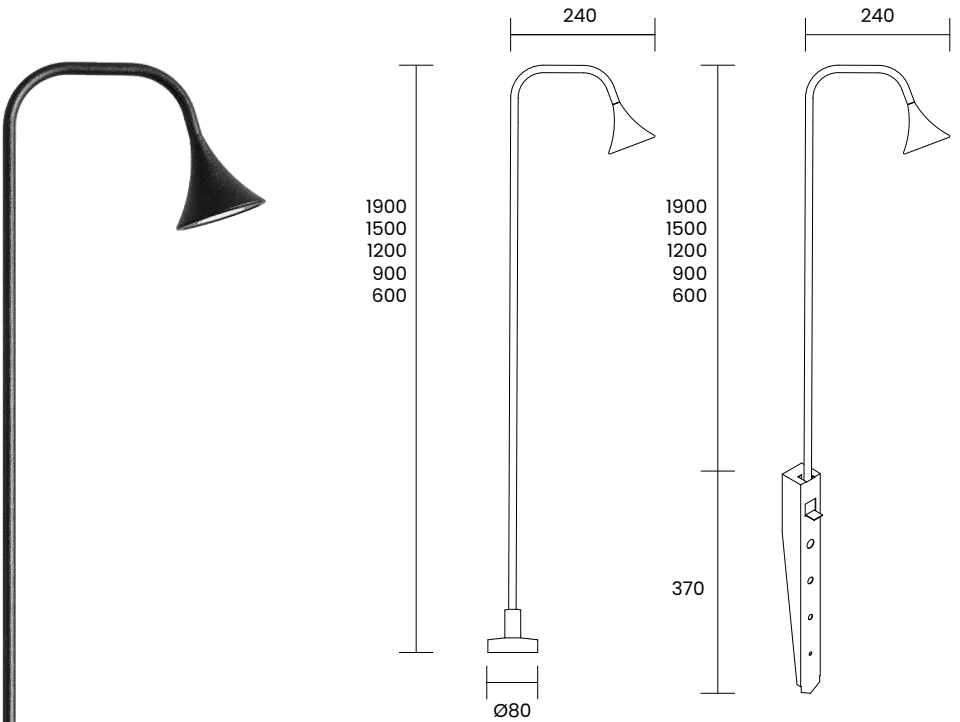


POWER SUPPLY	max 12W - max 350mA		
CODE	LBC01		with base
	LBC02		with stake
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K		
OPTICS	N M W D 15° 25° 40° Diff.		
FINISHES	G - Grey B - Black K - Corten		
STEM LENGTH	1 - 600mm 2 - 900mm 3 - 1200mm 4 - 1500mm 5 - 1900mm		
LUMEN OUTPUT SOURCE	1730lm (3000 K CRI90, 350mA)		
DELIVERED LUMEN OUTPUT	1290lm (3000 K CRI90, 350mA, 40°)		
LED NUMBER	1 power LED multichip		
MATERIAL	head and base in painted aluminium, stem in painted brass, inox AISI 316L stake		
DRIVER	not included, see pag. 347 and 350		
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable		
ACCESSORIES	outer case - code : JC990		
NOTES	other RAL on request, other lenghts on request 24V version on request		

PLG


Lilium arco

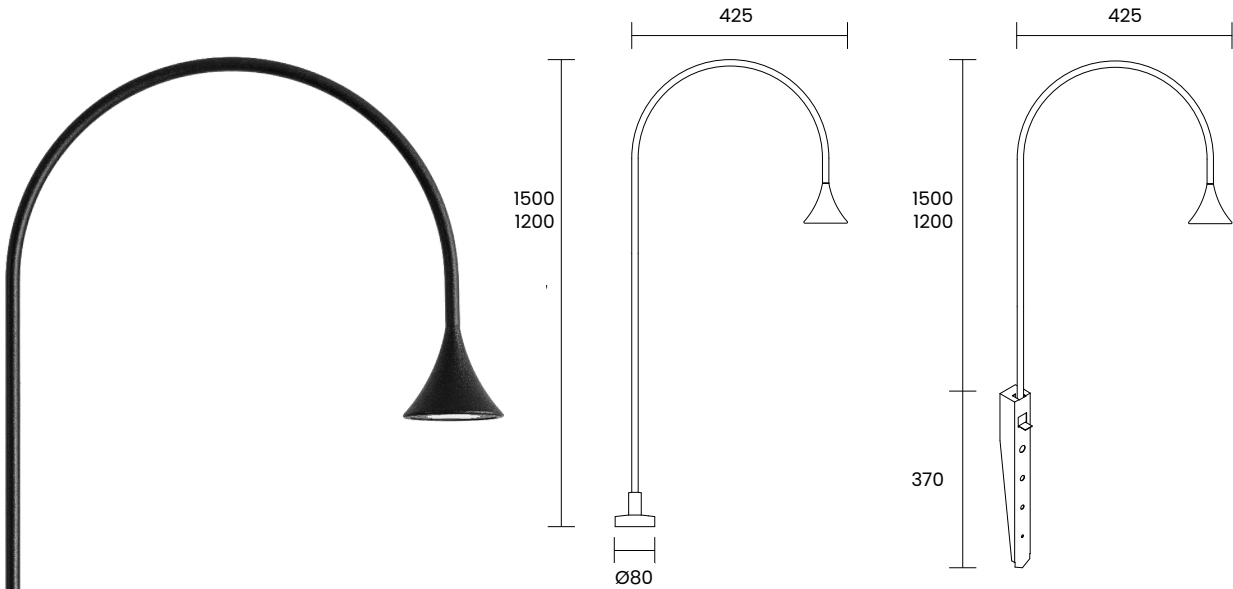

POWER SUPPLY	max 12W - max 350mA
CODE	LIL01  with base LIL02  with stake
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 15° 25° 40° Diff.
FINISHES	G - Grey B - Black K - Corten
STEM LENGTH	1 - 600mm 2 - 900mm 3 - 1200mm 4 - 1500mm 5 - 1900mm
LUMEN OUTPUT SOURCE	1730lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	1290lm (3000 K CRI90, 350mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	head and base in painted aluminium, stem in painted brass, inox AISI 316L stake
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	outer case - code : JC990
NOTES	other RAL on request, other lenghts on request 24V version on request

PLG

Grillo

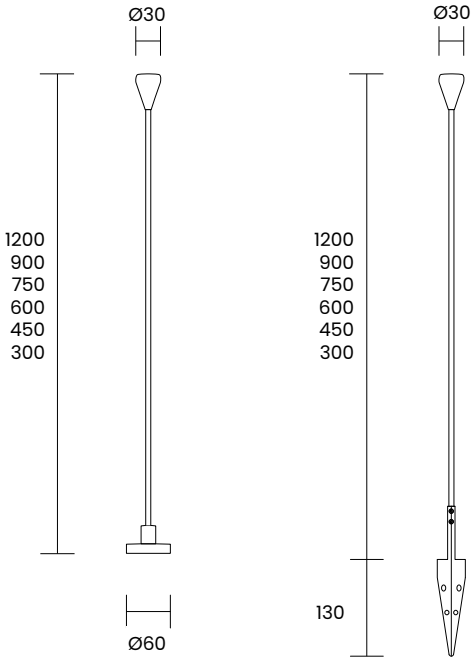


POWER SUPPLY	max 3W - max 700mA
CODE	GRL01 
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 10° 25° 40° 60° 110° Diff.
FINISHES	W - White G - Grey B - Black K - Corten
STEM LENGTH	1 - 300mm 2 - 450mm 3 - 600mm 4 - 750mm 5 - 900mm 6 - 1200mm
LUMEN OUTPUT SOURCE	190lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	160lm (3000 K CRI90, 700mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	body and base in anodized or painted aluminium, stem in copper, inox AISI 316L stake
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	stake - code : PI011 base - code : BAS08 outer case - code : IR990
NOTES	other RAL on request, other lenghts on request 24V version on request

PLG




Datura

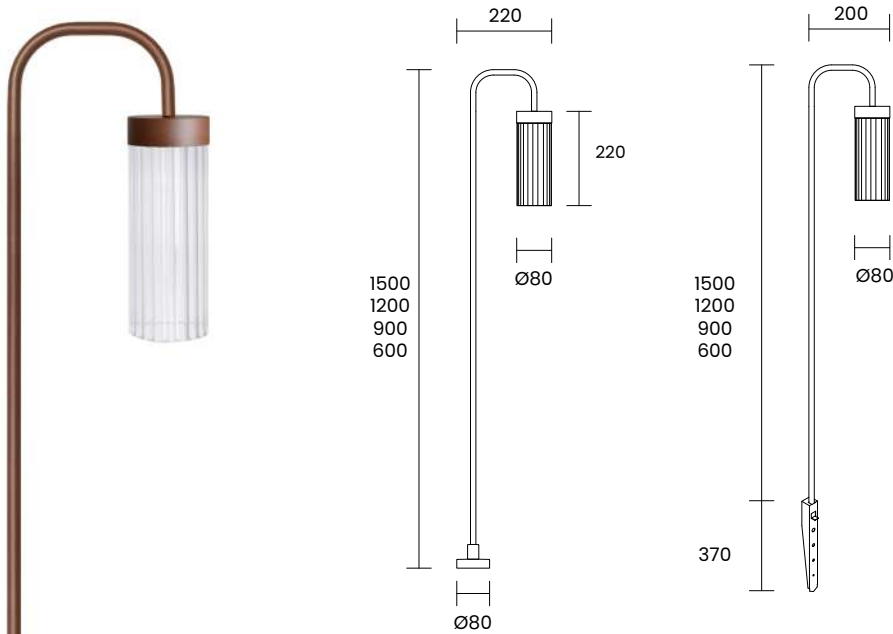

POWER SUPPLY	max 6W - 24V
CODE	DATB01  with base DATB02  with stake
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Diff.
FINISHES	B - Black K - Corten
STEM LENGTH	1 - 600mm 2 - 900mm 3 - 1200mm 4 - 1500mm
BASKET TEXTURE	1 - Trasparent 2 - Opal
LUMEN OUTPUT SOURCE	840lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	600lm (3000 K CRI90, 350mA, Diff.)
LED NUMBER	1 power LED multichip
MATERIAL	Aluminium, brass, borosilicate glass
DRIVER	not included, see pag. 351
POWER CABLE	includes 3 mt SUB4 FROST-UV 2x0,50 cable
ACCESSORIES	outer case - code : JC990
NOTES	other RAL on request, other lenghts on request


PLG

Datura L

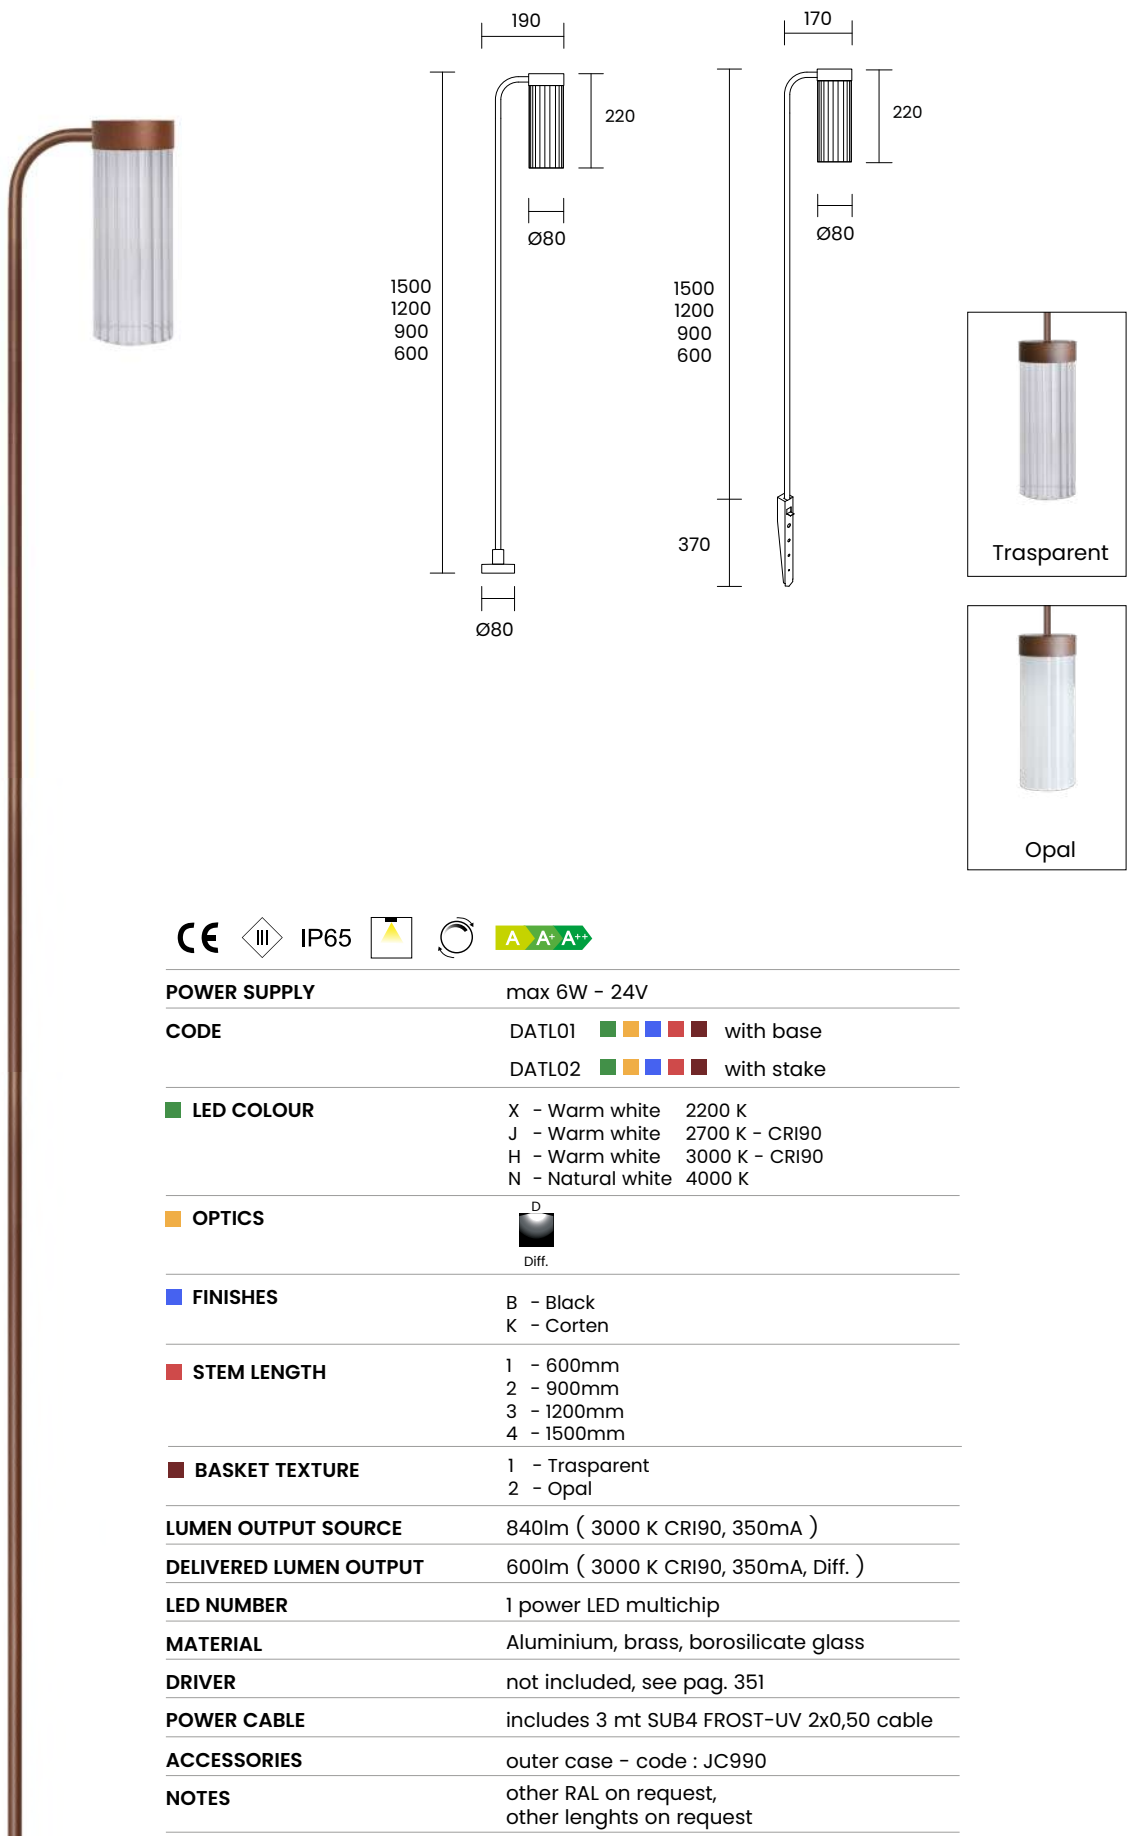



PLG

Datura arco

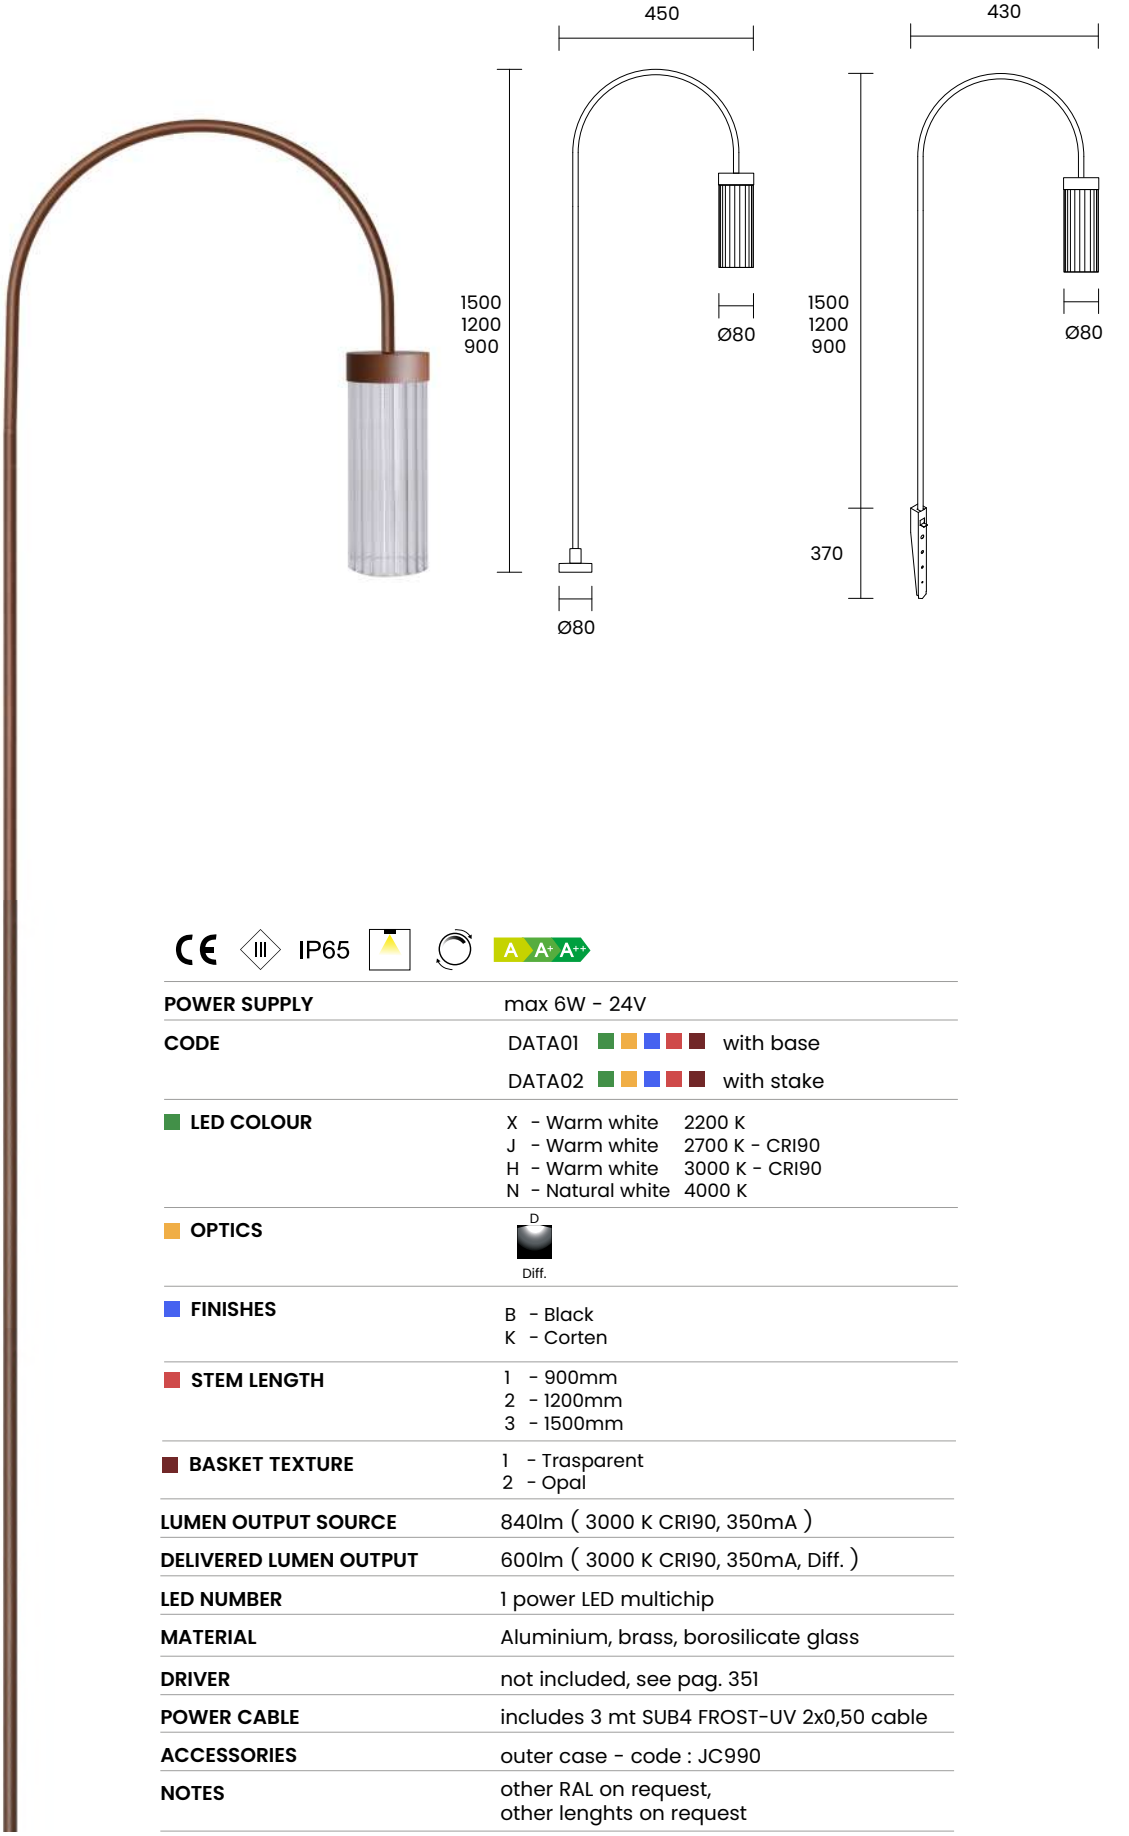

PLG


Datura tree

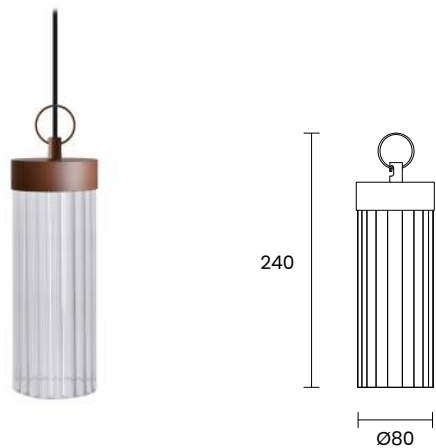

POWER SUPPLY	max 6W - 24V
CODE	MGLT1 ■ ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Diff.
FINISHES	B - Black K - Corten
BASKET TEXTURE	1 - Trasparent 2 - Opal
LUMEN OUTPUT SOURCE	840lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	600lm (3000 K CRI90, 350mA, Diff.)
LED NUMBER	1 power LED multichip
MATERIAL	Aluminium, brass, borosilicate glass
DRIVER	not included, see pag. 351
POWER CABLE	includes 3 mt SUB4 FROST-UV 2x0,50 cable
ACCESSORIES	outer case - code : JC990
NOTES	other RAL on request

PLG

Mini glicine

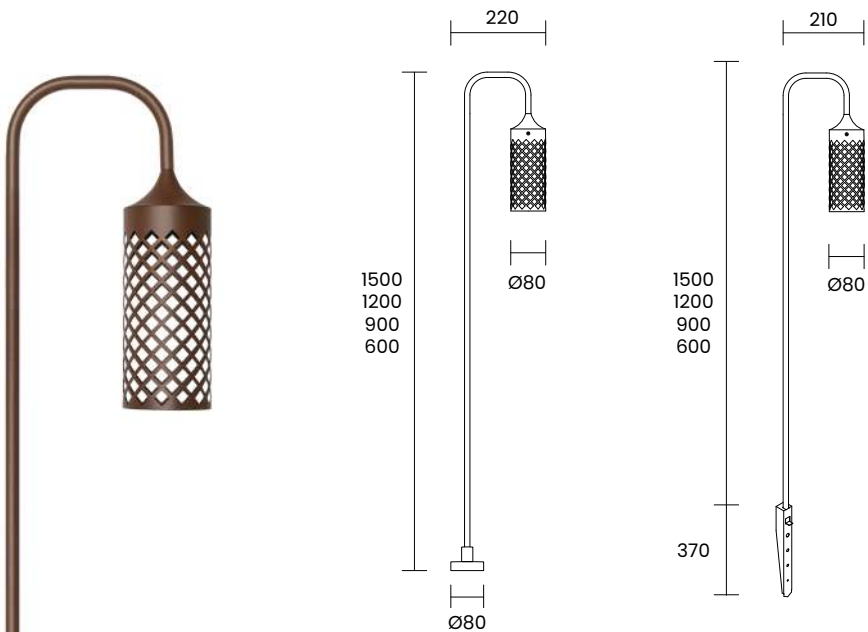


POWER SUPPLY	max 6W - 24V
CODE	MGLB1 ■ ■ ■ ■ with base MGLB2 ■ ■ ■ ■ with stake
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Diff.
FINISHES	B - Black K - Corten
STEM LENGTH	1 - 600mm 2 - 900mm 3 - 1200mm 4 - 1500mm
LUMEN OUTPUT SOURCE	840lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	600lm (3000 K CRI90, 350mA, Diff.)
LED NUMBER	1 power LED multichip
MATERIAL	Aluminium, Steel, Brass
DRIVER	not included, see pag. 351
POWER CABLE	includes 3 mt SUB4 FROST-UV 2x0,50 cable
ACCESSORIES	outer case - code : JC990
NOTES	other RAL on request, other lenghts on request

PLG



Mini glicine arco

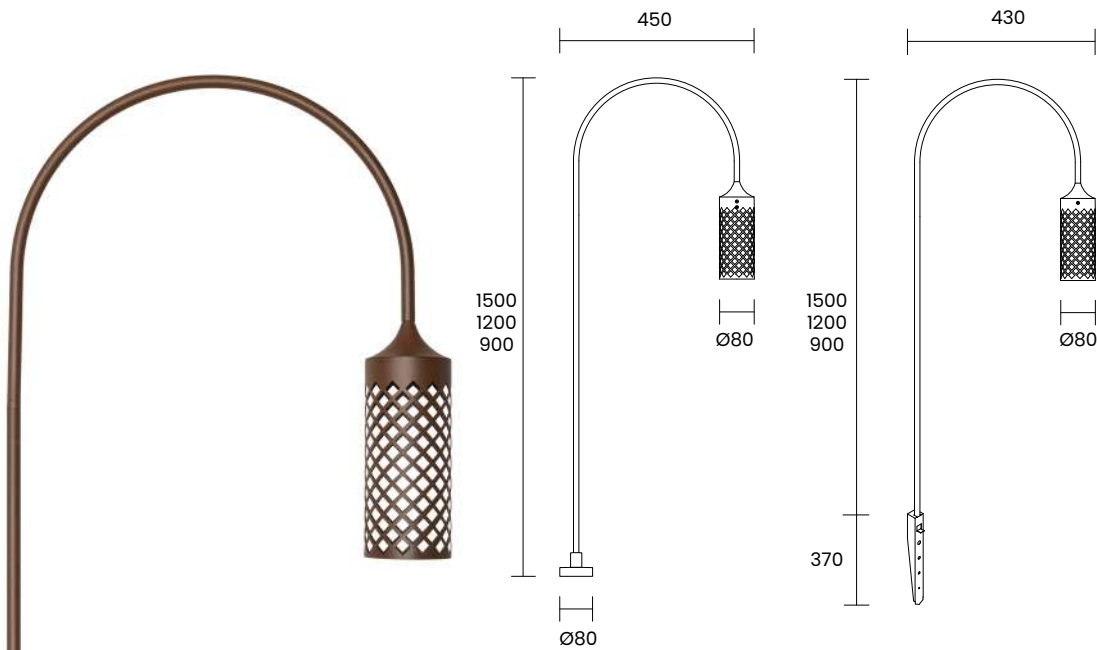


CE III IP65 A+ A++

POWER SUPPLY	max 6W – 24V
CODE	MGLA1 with base MGLA2 with stake
LED COLOUR	X – Warm white 2200 K J – Warm white 2700 K – CRI90 H – Warm white 3000 K – CRI90 N – Natural white 4000 K
OPTICS	Diff.
FINISHES	B – Black K – Corten
STEM LENGTH	1 – 900mm 2 – 1200mm 3 – 1500mm
LUMEN OUTPUT SOURCE	840lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	600lm (3000 K CRI90, 350mA, Diff.)
LED NUMBER	1 power LED multichip
MATERIAL	Aluminium, Steel, Brass
DRIVER	not included, see pag. 351
POWER CABLE	includes 3 mt SUB4 FROST-UV 2x0,50 cable
ACCESSORIES	outer case – code : JC990
NOTES	other RAL on request, other lenghts on request

PLG



Mini glicine pattern

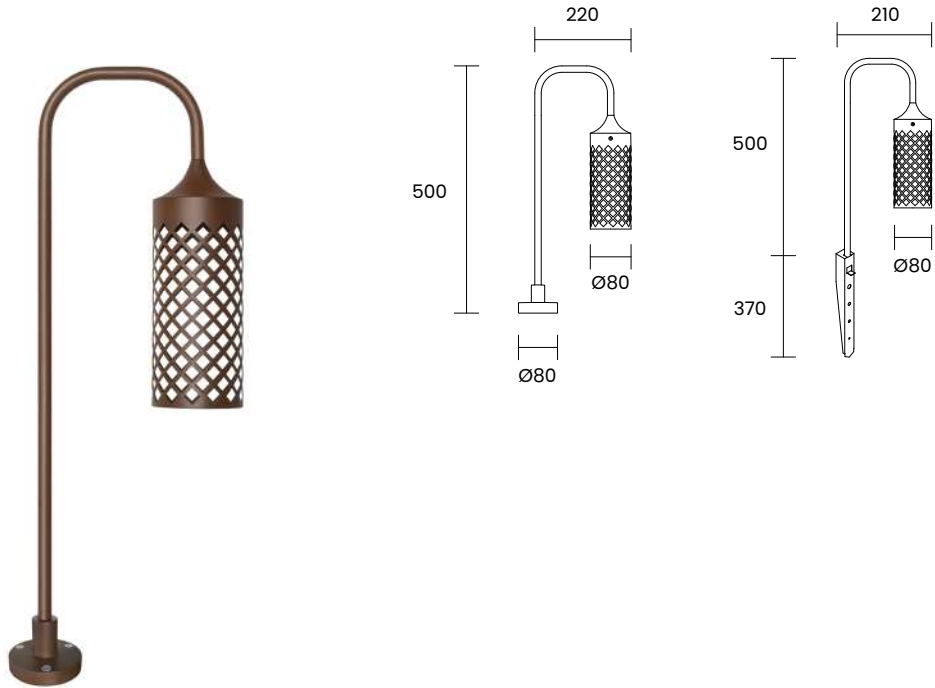


CE III IP65   A A+ A++

POWER SUPPLY	max 6W - 24V
CODE	MGLP1     with base MGLP2     with stake
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Diff.
FINISHES	B - Black K - Corten
LUMEN OUTPUT SOURCE	840lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	600lm (3000 K CRI90, 350mA, Diff.)
LED NUMBER	1 power LED multichip
MATERIAL	Aluminium, Steel, Brass
DRIVER	not included, see pag. 351
POWER CABLE	includes 3 mt SUB4 FROST-UV 2x0,50 cable
ACCESSORIES	outer case - code : JC990
NOTES	other RAL on request

PLG



Mini glicine tree

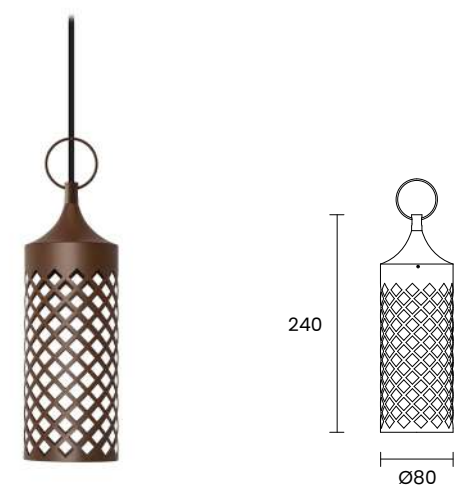


CE III IP65 A A+ A++

POWER SUPPLY	max 6W - 24V
CODE	MGLT1 ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K- CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Diff.
FINISHES	B - Black K - Corten
LUMEN OUTPUT SOURCE	840lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	600lm (3000 K CRI90, 350mA, Diff.)
LED NUMBER	1 power LED multichip
MATERIAL	Aluminium, Steel, Brass
DRIVER	not included, see pag. 351
POWER CABLE	includes 3 mt SUB4 FROST-UV 2x0,50 cable
NOTES	other RAL on request

PLG



Glicine

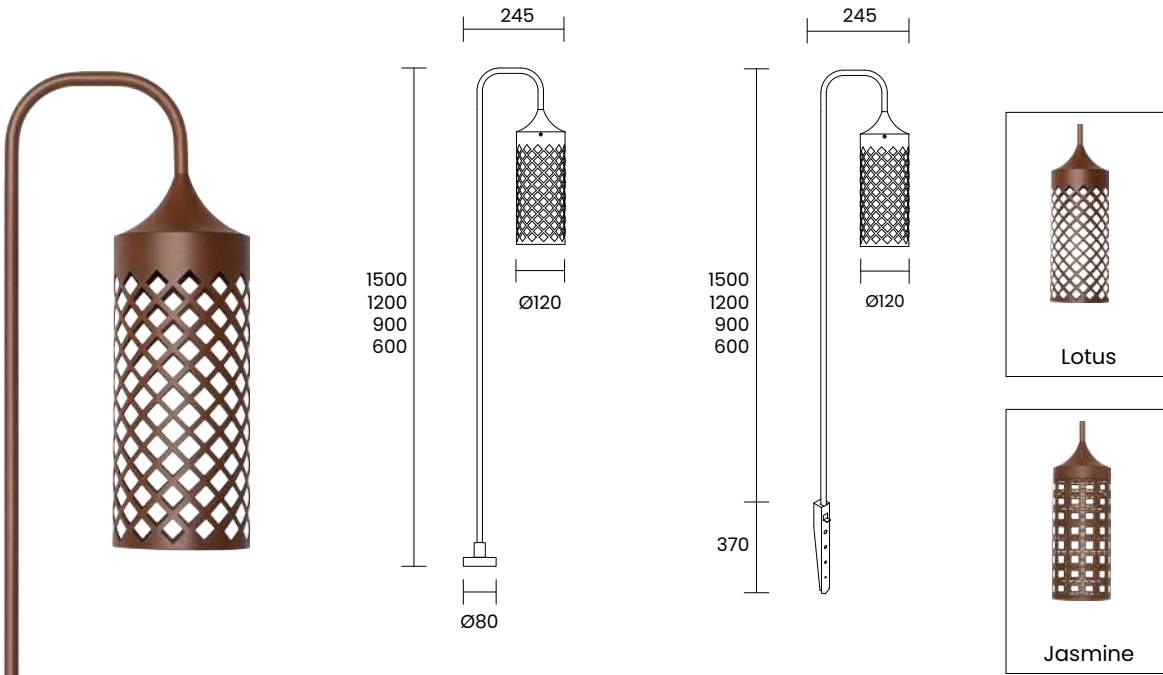


CE III IP65 A A+ A++

POWER SUPPLY	max 9W - 24V
CODE	GLB01 with base GLB02 with stake
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	Diff.
FINISHES	B - Black K - Corten
STEM LENGTH	1 - 600mm 2 - 900mm 3 - 1200mm 4 - 1500mm
BASKET TEXTURE	1 - Lotus 2 - Jasmine
LUMEN OUTPUT SOURCE	1260lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	600lm (3000 K CRI90, 500mA, Diff.)
LED NUMBER	1 power LED multichip
MATERIAL	Aluminium, Steel, Brass
DRIVER	not included, see pag. 351
POWER CABLE	includes 3 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	outer case - code : JC990
NOTES	other RAL on request, other lenglths on request

PLG



Glicine arco

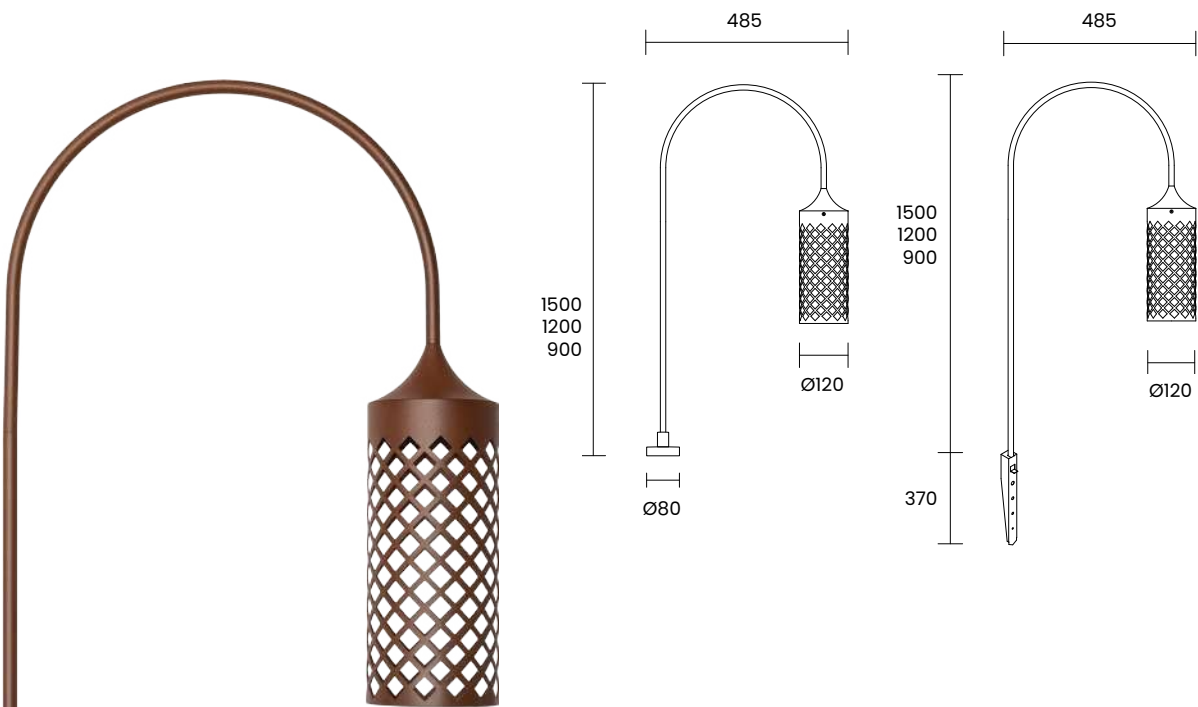

CE III IP65   A A+ A++

POWER SUPPLY	max 9W - 24V
CODE	GLA01     with base GLA02     with stake
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K- CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Diff.
FINISHES	B - Black K - Corten
STEM LENGTH	1 - 900mm 2 - 1200mm 3 - 1500mm
BASKET TEXTURE	1 - Lotus 2 - Jasmine
LUMEN OUTPUT SOURCE	1260lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	290lm (3000 K CRI90, 500mA, Diff.)
LED NUMBER	1 power LED multichip
MATERIAL	Aluminium, Steel, Brass
DRIVER	not included, see pag. 351
POWER CABLE	includes 3 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	outer case - code : JC990
NOTES	other RAL on request, other lenghts on request


PLG




Basket texture " Lotus " – (top view)



Basket texture " Rose " – (top view)

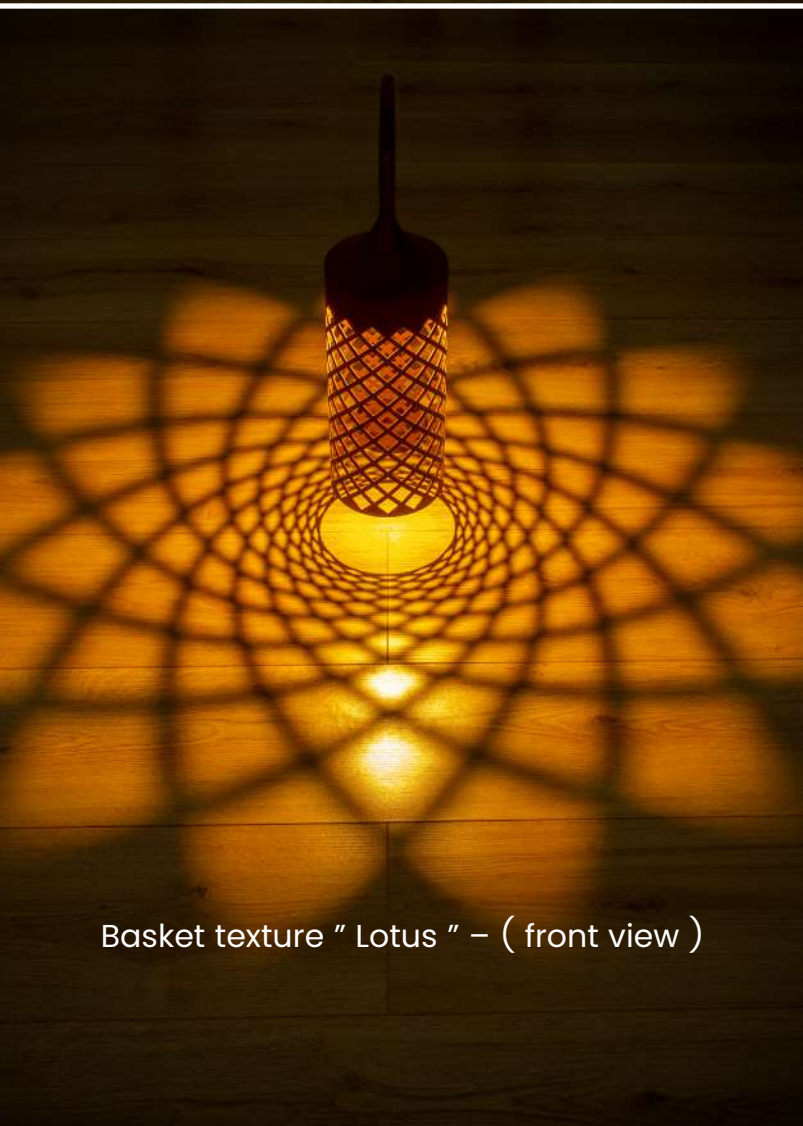


Basket texture " Lotus " – (front view)

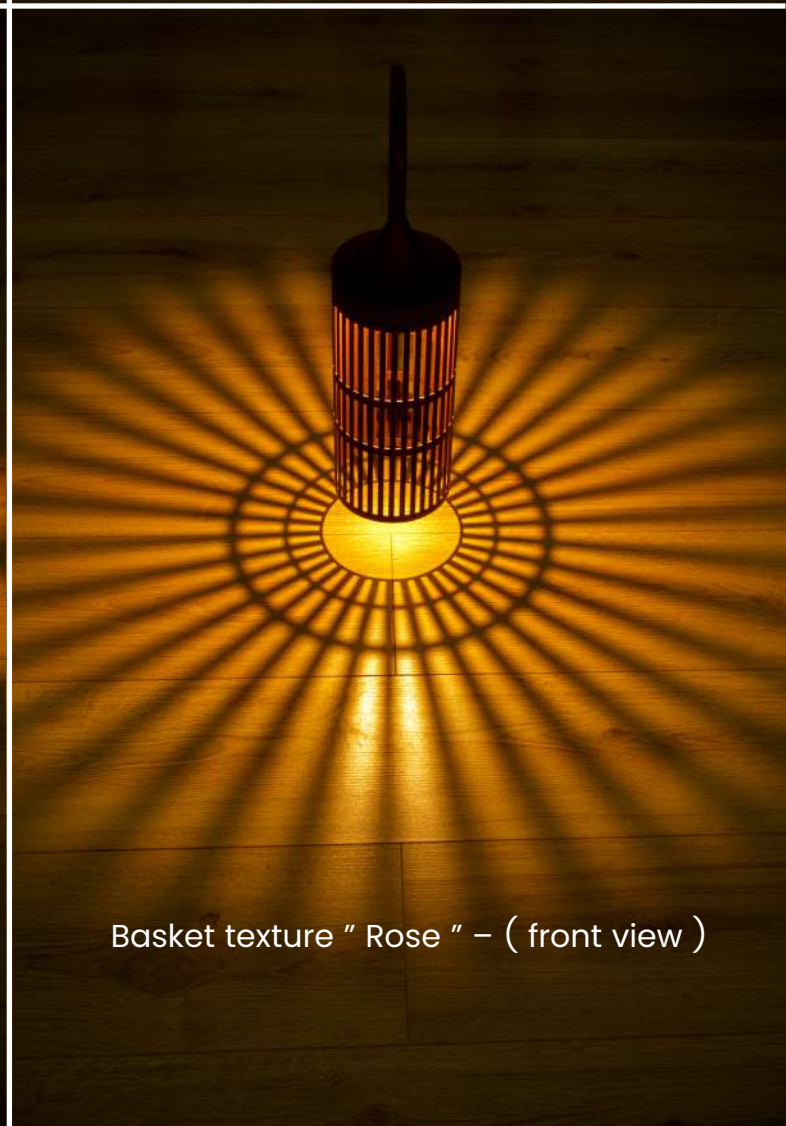

Basket texture " Rose " – (front view)

Glicine pattern

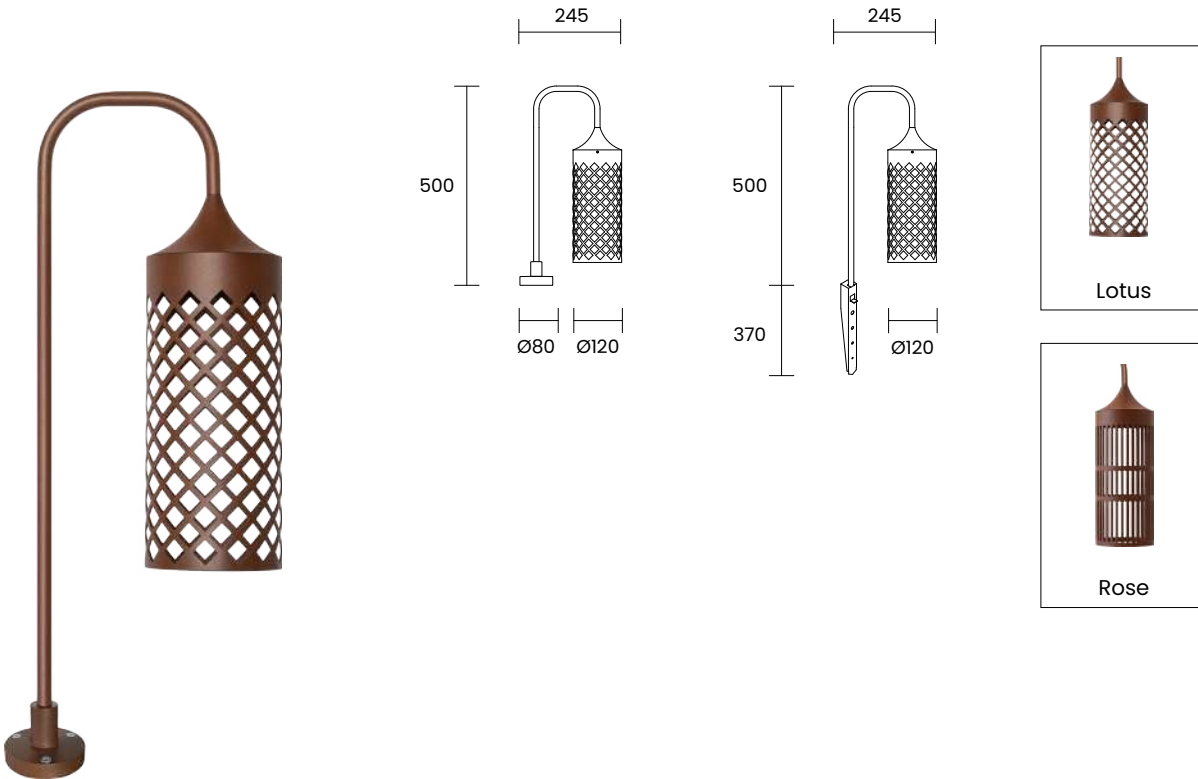


CE	III	IP65	LED	Diff.	A A+ A++
POWER SUPPLY		max 9W - 24V			
CODE		GLP01 ■ ■ ■ ■ with base			
		GLP02 ■ ■ ■ ■ with stake			
LED COLOUR		X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K			
OPTICS		D Diff.			
FINISHES		B - Black K - Corten			
BASKET TEXTURE		1 - Lotus 3 - Rose			
LUMEN OUTPUT SOURCE		1260lm (3000 K CRI90, 500mA)			
DELIVERED LUMEN OUTPUT		290lm (3000 K CRI90, 500mA, Diff.)			
LED NUMBER		1 power LED multichip			
MATERIAL		Aluminium, Steel, Brass			
DRIVER		not included, see pag. 351			
POWER CABLE		includes 3 mt Sub4 FROST-UV 2 x 0,50 cable			
ACCESSORIES		outer case - code : JC990			
NOTES		other RAL on request			

PLG



Glicine tree

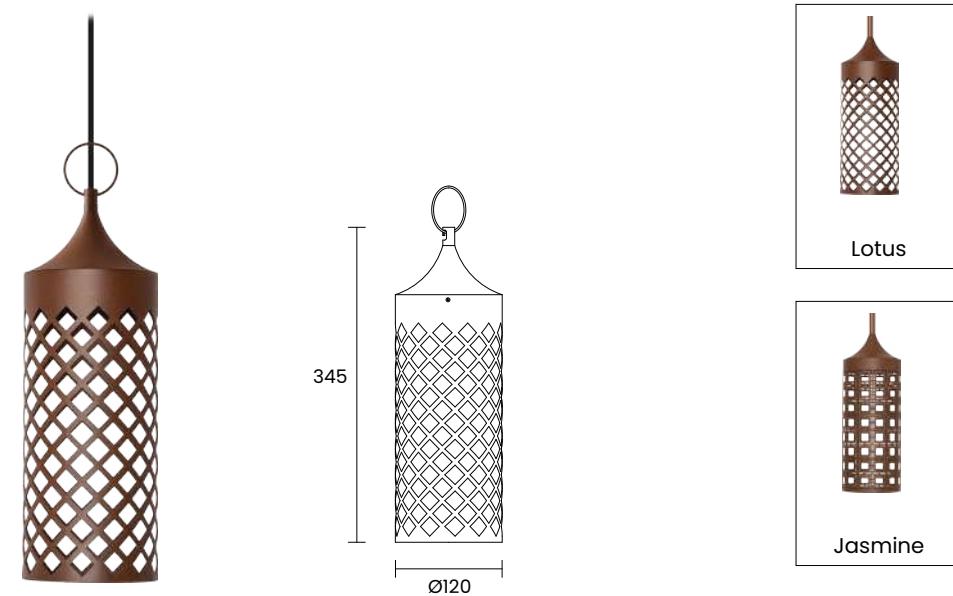


CE III IP65 A A+ A++	
POWER SUPPLY	max 9W - 24V
CODE	GLT01 ■ ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K- CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Diff.
FINISHES	B - Black K - Corten
BASKET TEXTURE	1 - Lotus 2 - Jasmine
LUMEN OUTPUT SOURCE	1260lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	600lm (3000 K CRI90, 500mA, Diff.)
LED NUMBER	1 power LED multichip
MATERIAL	Aluminium, Steel, Brass
DRIVER	not included, see pag. 351
POWER CABLE	includes 3 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	other RAL on request

PLG



Bee

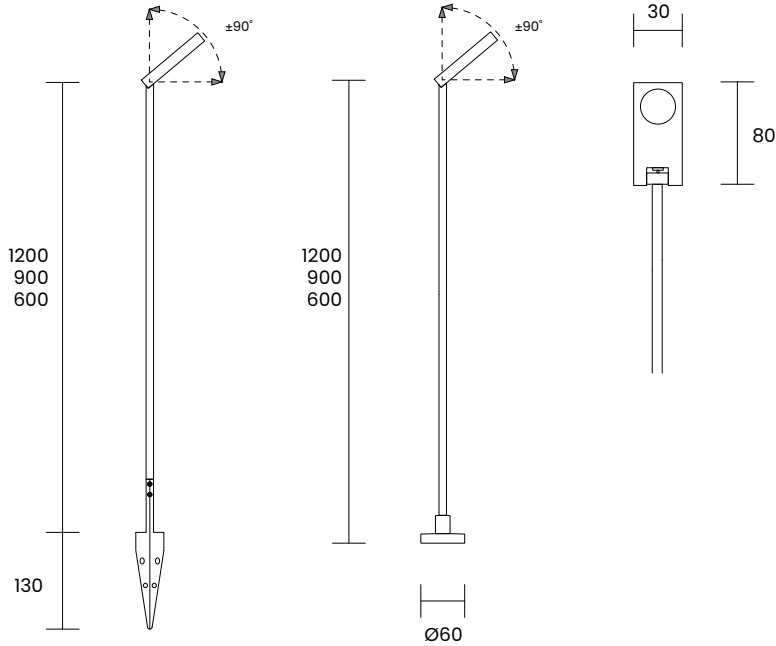


CE III 400gr IP67 400gr 15° 25° 35° 40°x17° A A+ A++

POWER SUPPLY	max 3W - max 350mA
CODE	BEE01 ■ ■ ■ ■ with base BEE02 ■ ■ ■ ■ with stake
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W E 15° 25° 35° 40°x17°
FINISHES	B - Black K - Corten
STEM LENGTH	1 - 600mm 2 - 900mm 3 - 1200mm
LUMEN OUTPUT SOURCE	380lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	310lm (3000 K CRI90, 350mA, 35°)
LED NUMBER	3 power LEDs
MATERIAL	head base in painted aluminium, inox AISI 316L stake
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	outer case code : IR990
NOTES	other RAL on request, other lenghts on request 24V version on request


PLG



Bombo

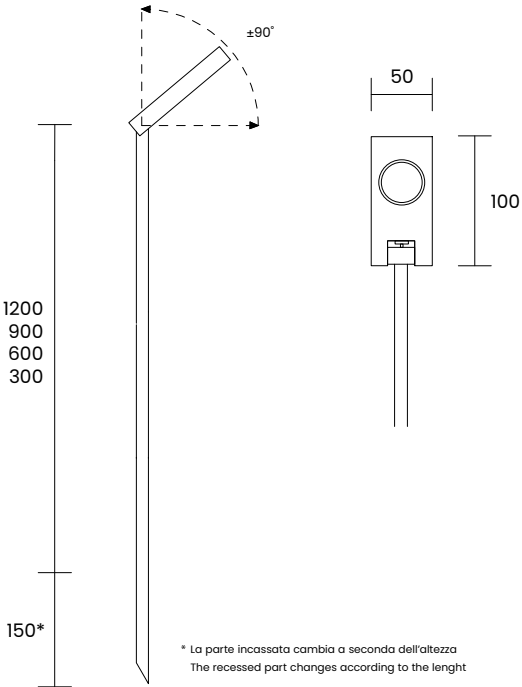

* La parte incassata cambia a seconda dell'altezza
The recessed part changes according to the lenght




POWER SUPPLY	max 6W - max 700mA	
CODE	BMB01 ■ ■ ■ ■	
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K- CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K	
OPTICS	N M W X 20° 30° 40° 60°	
FINISHES	B - Black K - Corten	
STEM LENGTH	1 - 300mm 2 - 600mm 3 - 900mm 4 - 1200mm	
LUMEN OUTPUT SOURCE	800lm (3000 K CRI90, 700mA)	
DELIVERED LUMEN OUTPUT	430lm (3000 K CRI90, 700mA, 30°)	
LED NUMBER	1 power LED multichip	
MATERIAL	head in painted aluminium, stem in painted inox AISI 316	
DRIVER	not included, see pag. 349 and 350	
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable	
NOTES	other RAL on request, other lenghts on request 24V version on request	

PLG



Girasole

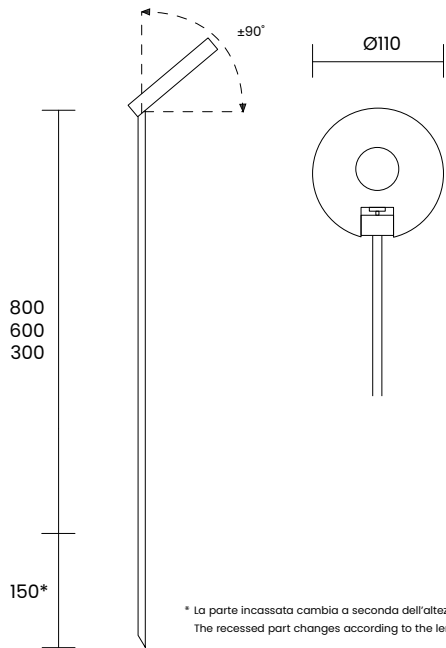


CE III 800gr IP67 A A+ A++	
POWER SUPPLY	max 6W - max 350mA
CODE	GRS01
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	D Diffused
FINISHES	B - Black K - Corten
STEM LENGTH	1 - 300mm 2 - 600mm 3 - 800mm
LUMEN OUTPUT SOURCE	890lm (3000 K CRI90, 350mA)
DELIVERED LUMEN OUTPUT	460lm (3000 K CRI90, 350mA, 36°)
LED NUMBER	1 power LED multichip
MATERIAL	head in painted aluminium, stem in painted inox AISI 316L
DRIVER	not included, see pag. 347 and 350
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	other RAL on request, 24V version on request

PLG




Pin

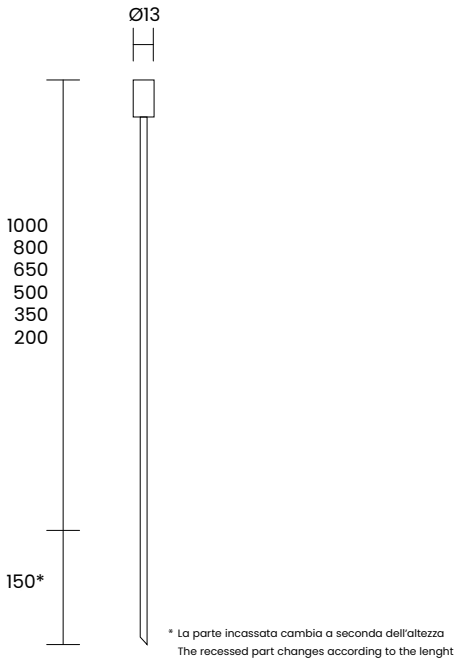

CE III IP65 70gr	
POWER SUPPLY	max 2W - max 500mA
CODE	PIN01
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	360° Diff.
FINISHES	B - Black K - Corten
STEM LENGTH	1 - 200mm 2 - 350mm 3 - 500mm 4 - 650mm 5 - 800mm 6 - 1000mm
LUMEN OUTPUT SOURCE	180lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	110lm (3000 K CRI90, 500mA, 360° Diff.)
LED NUMBER	1 power LED
MATERIAL	head in painted aluminium, stem in painted brass
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,25 cable
NOTES	*the recessed part changes according to the lenght, other RAL on request, other lenghts on request 24V version on request

PLG

Stelo


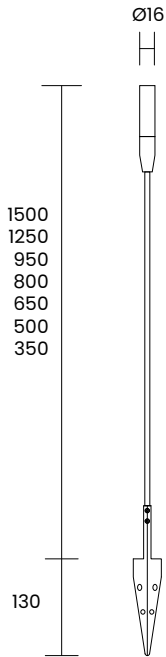


CE III IP65 500gr	
POWER SUPPLY	max 3W - max 700mA
CODE	STL01
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	360° Diff.
FINISHES	B - Black K - Corten
STEM LENGTH	1 - 350mm 2 - 500mm 3 - 650mm 4 - 800mm 5 - 950mm 6 - 1250mm 7 - 1500mm
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	160lm (3000 K CRI90, 700mA, 360° Diff.)
LED NUMBER	1 power LED
MATERIAL	head in painted aluminium, stem in painted brass, inox AISI 316L stake
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	other RAL on request, other lenghts on request 24V version on request

PLG



Maxi Stelo

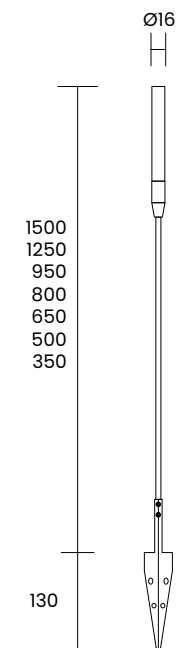

POWER SUPPLY	max 3W - max 700mA
CODE	MSTLI ■ ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N  360° Diff.
FINISHES	B - Black K - Corten
STEM LENGTH	1 - 350mm 2 - 500mm 3 - 650mm 4 - 800mm 5 - 950mm 6 - 1250mm 7 - 1500mm
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	160lm (3000 K CRI90, 700mA, 360° Diff.)
LED NUMBER	1 power LED
MATERIAL	head in painted aluminium, stem in painted brass, inox AISI 316L stake
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	other RAL on request, other lenghts on request 24V version on request

PLG



Stelo Sfera




CE III 500gr IP65 500gr A A+ A++

POWER SUPPLY	max 3W - max 700mA
CODE	SSF01 ■ ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N 360° Diff.
FINISHES	B - Black K - Corten
STEM LENGTH	1 - 350mm 2 - 500mm 3 - 650mm 4 - 800mm 5 - 950mm 6 - 1250mm 7 - 1500mm
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	160lm (3000 K CRI90, 700mA, 360° Diff.)
LED NUMBER	1 power LED
MATERIAL	head in painted aluminium, stem in painted brass, inox AISI 316L stake
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	other RAL on request, other lenghts on request 24V version on request

PLG



Pennisetum

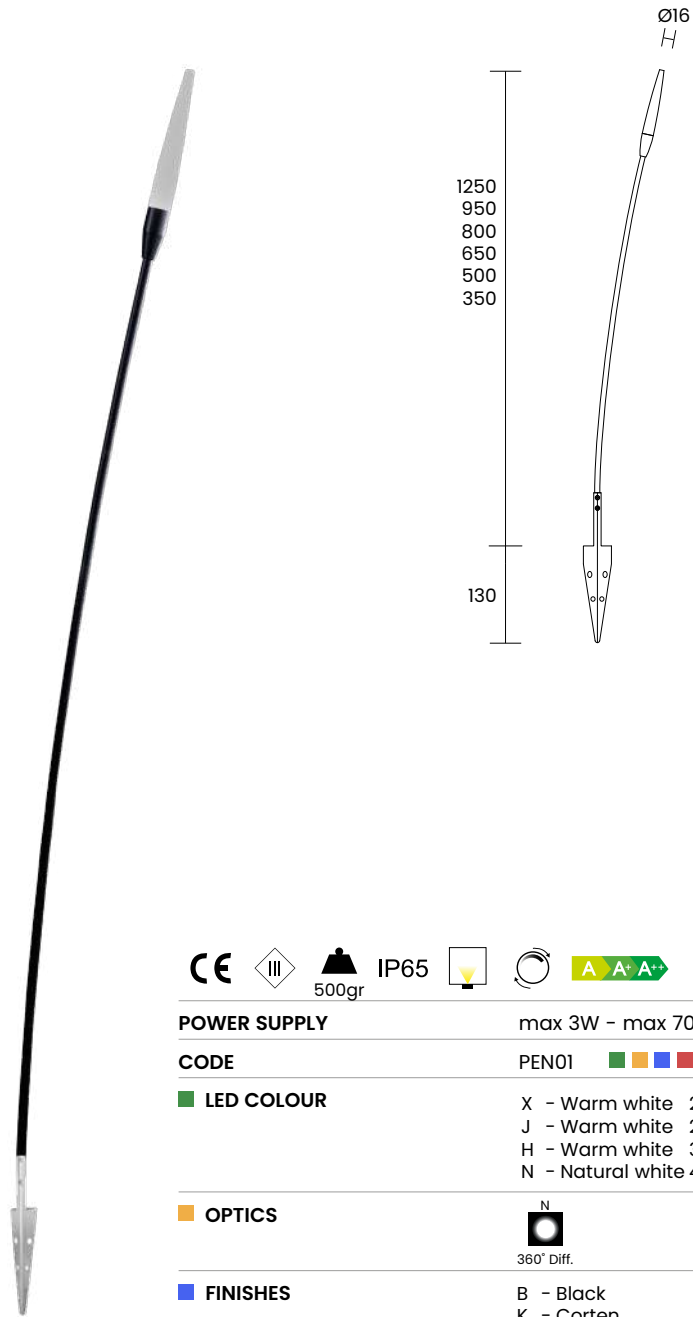


CE III 500gr IP65   A A+ A++

POWER SUPPLY	max 3W - max 700mA
CODE	PEN01    
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 360° Diff.
FINISHES	B - Black K - Corten
STEM LENGTH	1 - 350mm 2 - 500mm 3 - 650mm 4 - 800mm 5 - 950mm 6 - 1250mm
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	160lm (3000 K CRI90, 700mA, 360° Diff.)
LED NUMBER	1 power LED
MATERIAL	head in painted aluminium, stem in painted brass, inox AISI 316L stake
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	other RAL on request, other lenghts on request 24V version on request

PLG



Juncus

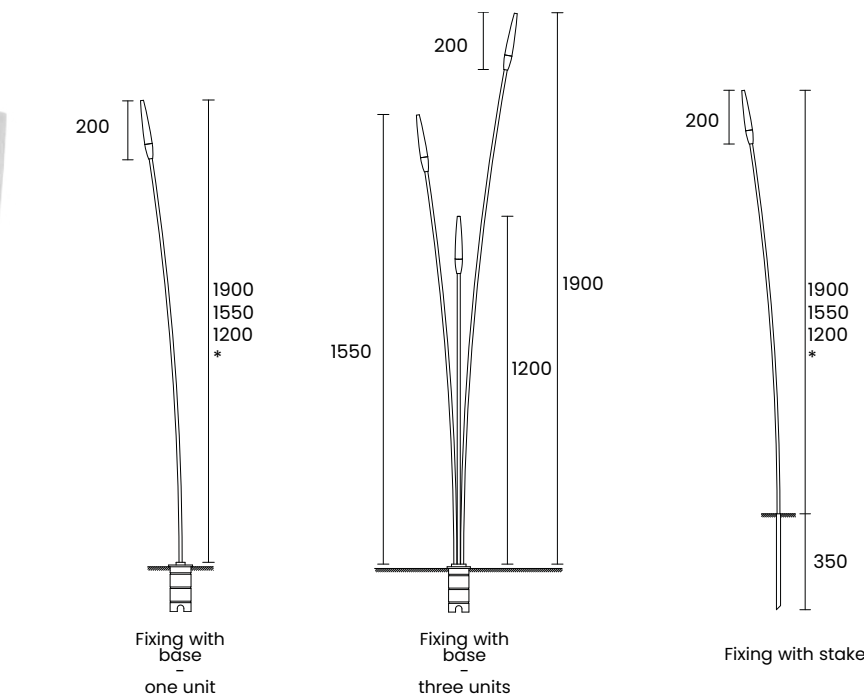


CE III 500gr IP65 A A+ A++

POWER SUPPLY	max 3,5W - 350mA max 5W - 500mA
CODE	JNC01 ■ ■ ■ ■
LED COLOUR	J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 360° Diff.
FINISHES	B - Black K - Corten
STEM LENGTH	1 - 900mm 2 - 1200mm 3 - 1550mm 4 - 1900mm
LUMEN OUTPUT SOURCE	400lm (3000 K CRI90, 350mA) 580lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	250lm (3000 K CRI90, 350mA, 360° Diff.) 320lm (3000 K CRI90, 500mA, 360° Diff.)
LED NUMBER	1 power LED multichip
MATERIAL	head and stem in painted aluminium inox AISI 316L stake
DRIVER	not included, see pag. 347, 348 and 350
POWER CABLE	includes 3 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	inox stake - code : PI008 outer case - code : JC990 base for one unit - code : BAS01 base for three unit - code : BAS02
NOTES	other RAL on request, other lenghts on request 24V version on request

PLG



Ape

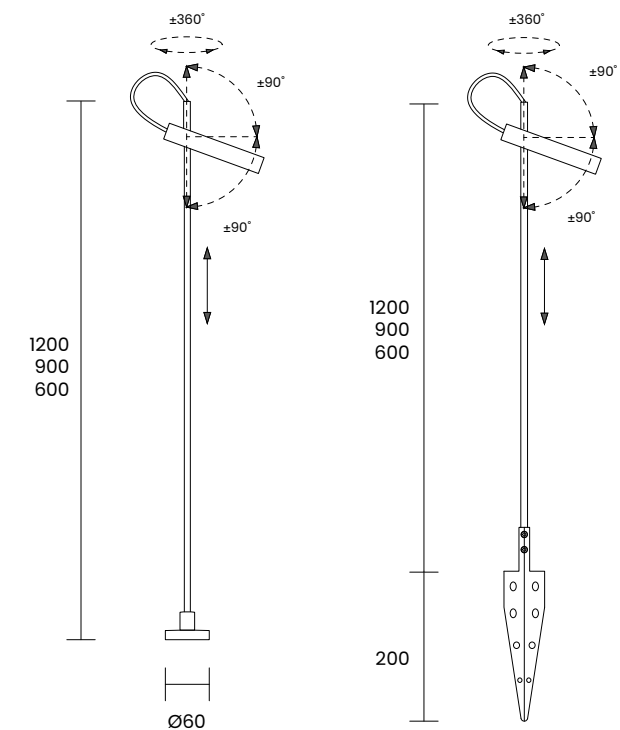


POWER SUPPLY	max 3W - max 700mA
CODE	APB01     with base APE01     with stake
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 15°  25°  40°  60°
FINISHES	B - Black K - Corten
STEM LENGTH	1 - 600mm 2 - 900mm 3 - 1200mm
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	215lm (3000 K CRI90, 700mA, 40°)
LED NUMBER	1 power LED
MATERIAL	head and base in painted aluminium, stem in inox AISI 316L
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	outer case - code : JC990
NOTES	other RAL on request, other lengths on request 24V version on request

PLG




Ape

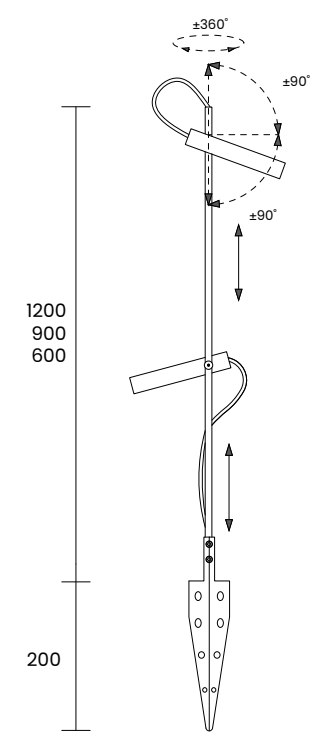



CE III 700gr IP67 700gr

POWER SUPPLY	max 3W x2 - max 700mA
CODE	APE02 ■ ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X 15° 25° 40° 60°
FINISHES	B - Black K - Corten
STEM LENGTH	1 - 600mm 2 - 900mm 3 - 1200mm
LUMEN OUTPUT SOURCE	230lm x2 (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	215lm x2 (3000 K CRI90, 700mA, 45°)
LED NUMBER	2 power LEDs
MATERIAL	head in painted aluminium, stem and stake in inox AISI 316L
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	other RAL on request, other lenghts on request 24V version on request

PLG

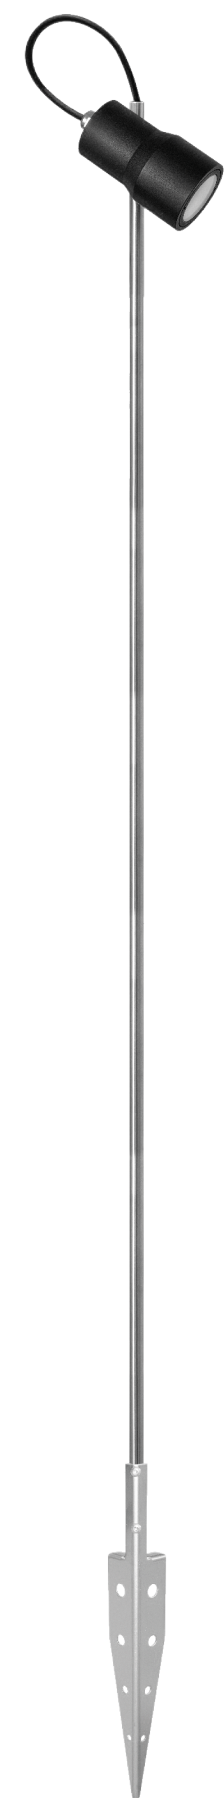

Firefly

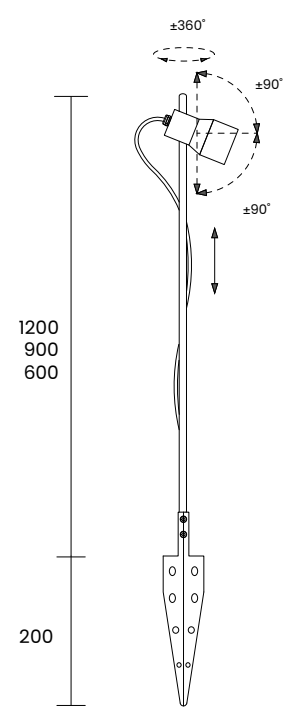


POWER SUPPLY	max 7W - max 700mA
CODE	FRF01 ■ ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X 20° 30° 40° 60°
FINISHES	B - Black K - Corten
STEM LENGTH	1 - 600mm 2 - 900mm 3 - 1200mm
LUMEN OUTPUT SOURCE	800lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	530lm (3000 K CRI90, 700mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	head in painted aluminium, stem and stake in inox AISI 316L
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	other RAL on request, other lenghts on request 24V version on request

PLG



Firefly


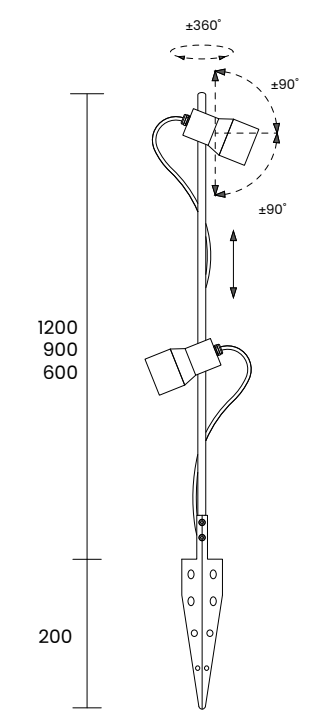


CE III 1500gr IP67 A A+ A++	
POWER SUPPLY	max 7W x2 - max 700mA
CODE	FRF02
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X 20° 30° 40° 60°
FINISHES	B - Black K - Corten
STEM LENGTH	1 - 600mm 2 - 900mm 3 - 1200mm
LUMEN OUTPUT SOURCE	800lm x2 (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	530lm x2 (3000 K CRI90, 700mA, 40°)
LED NUMBER	2 power LEDs multichip
MATERIAL	head in painted aluminium, stem and stake in inox AISI 316L
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	other RAL on request, other lenghts on request 24V version on request

PLG



Robin


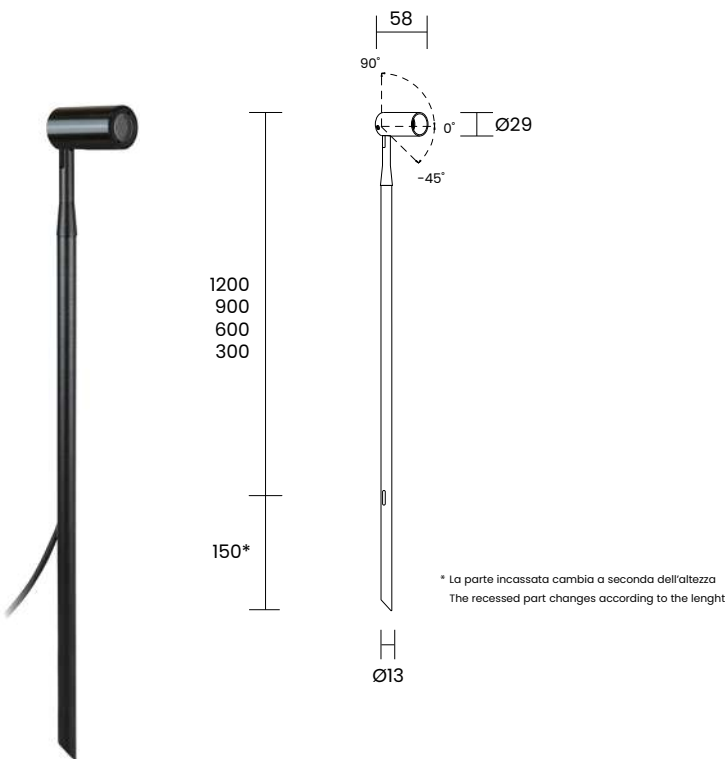


POWER SUPPLY	max 3W - max 700mA
CODE	RB001 ■ ■ ■ ■
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N M W X T D 10°25°40°60°110°Diff.
FINISHES	G - Grey B - Black
STEM LENGTH	1 - 300mm 2 - 600mm 3 - 900mm 4 - 1200mm
LUMEN OUTPUT SOURCE	230lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	215lm (3000 K CRI90, 700mA, 40°)
LED NUMBER	1 power LED
MATERIAL	body and flange in anodized aluminium
DRIVER	not included, see pag. 349 and 350
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	see pag. 321
NOTES	other RAL on request, 24V version on request

PLG



Stem


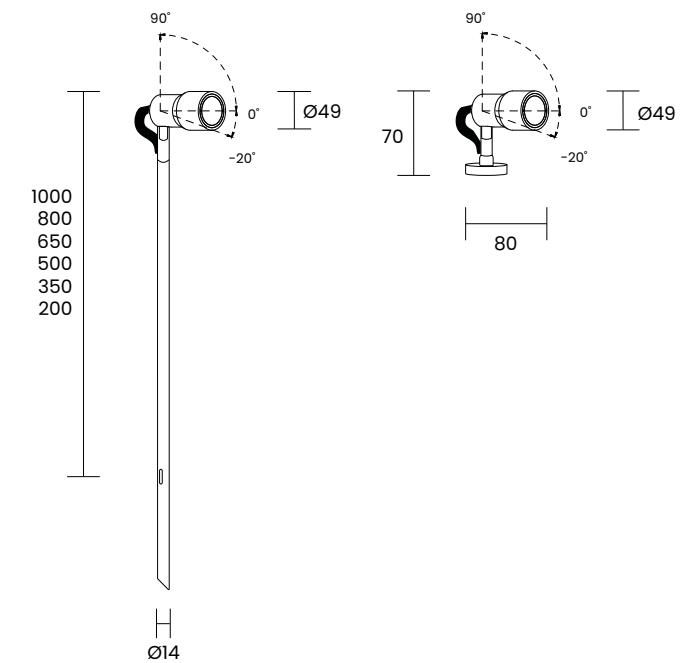


POWER SUPPLY	max 9W - max 500mA
CODE	STM01 ■ ■ ■ ■ with stake STM02 ■ ■ ■ ■ with base STM03 ■ ■ ■ ■ short version
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	N 20° M 30° W 40° X 60°
FINISHES	B - Black K - Corten
STEM LENGTH	1 - 200mm 2 - 350mm 3 - 500mm 4 - 650mm 5 - 800mm 6 - 1000mm
LUMEN OUTPUT SOURCE	1200lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	1010lm (3000 K CRI90, 500mA, 40°)
LED NUMBER	1 power LED multichip
MATERIAL	head in painted aluminium, stem in painted inox AISI 316L
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	see pag. 320 and 321
NOTES	other RAL on request, 24V version on request

PLG



Blade

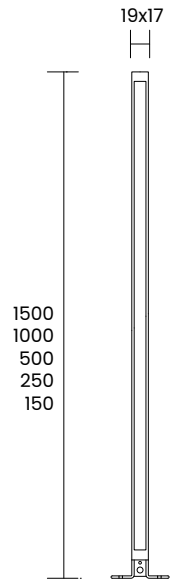

INOX PLATE : PLT03



INOX STAKE : PI006





POWER SUPPLY	max 15W/mt - 24V
CODE	BLD03 
LED COLOUR	H - Warm white 3000 K - CRI90
OPTICS	 160° Diffused
FINISHES	B - Black K - Corten
LENGTH	1 - 150mm 2 - 250mm 3 - 500mm 4 - 1000mm 5 - 1500mm
LUMEN OUTPUT SOURCE	1000lm (3000 K CRI90)
DELIVERED LUMEN OUTPUT	1000lm (3000 K CRI90, 160° Diff.)
LED NUMBER	Strip led
MATERIAL	body in painted inox AISI 316L
DRIVER	not included, see pag. 351
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	inox plate - code : PLT03 inox stake - code : PI006
NOTES	other RAL on request

PLG



Blade horizontal

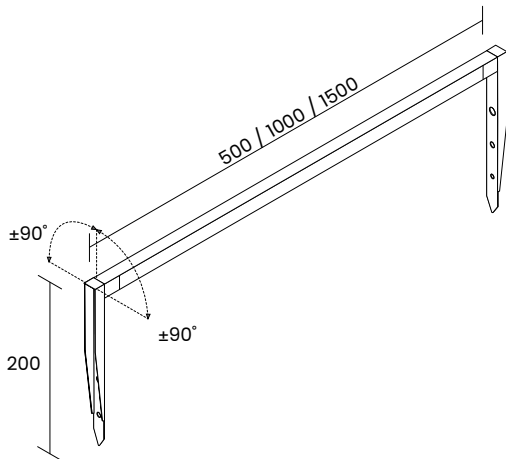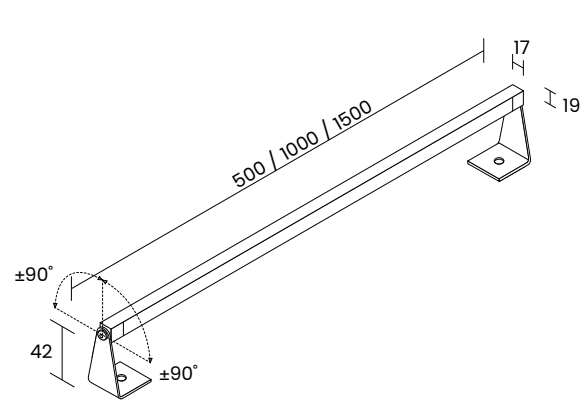


	CE III IP65 A+ A+ A+
POWER SUPPLY	max 15W/mt - 24V
CODE	BLD01 with brackets
LED COLOUR	H - Warm white 3000 K - CRI90
OPTICS	D 160° Diffused
FINISHES	B - Black K - Corten
LENGTH	1 - 500mm 2 - 1000mm 3 - 1500mm
LUMEN OUTPUT SOURCE	1000lm (3000 K CRI90)
DELIVERED LUMEN OUTPUT	1000lm (3000 K CRI90, 160° Diff.)
LED NUMBER	Strip led
MATERIAL	body in painted inox AISI 316L
DRIVER	not included, see pag. 351
POWER CABLE	includes 1,5 mt SUB4 FROST-UV 2x0,50 cable
NOTES	other RAL on request

	CE III IP65 A+ A+ A+
POWER SUPPLY	max 15W/mt - 24V
CODE	BLD02 with stakes
LED COLOUR	H - Warm white 3000 K - CRI90
OPTICS	D 160° Diffused
FINISHES	B - Black K - Corten
LENGTH	1 - 500mm 2 - 1000mm 3 - 1500mm
LUMEN OUTPUT SOURCE	1000lm (3000 K CRI90)
DELIVERED LUMEN OUTPUT	1000lm (3000 K CRI90, 160° Diff.)
LED NUMBER	Strip led
MATERIAL	body in painted inox AISI 316L
DRIVER	not included, see pag. 351
POWER CABLE	includes 1,5 mt SUB4 FROST-UV 2x0,50 cable
NOTES	other RAL on request




Radente

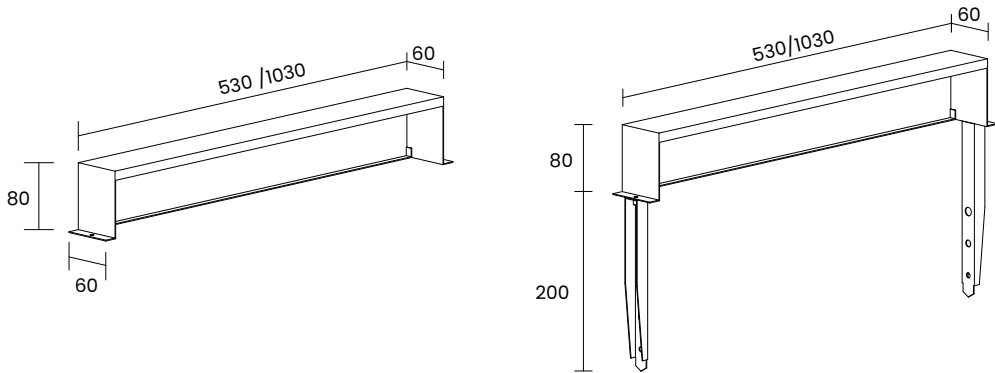


POWER SUPPLY	max 15W/mt - 24V
CODE	RAD01 ■ ■ ■ ■
LED COLOUR	H - Warm white 3000 K - CRI90
OPTICS	D 160° Diffused
FINISHES	B - Black K - Corten
LENGTH	1 - 530mm 2 - 1030mm
LUMEN OUTPUT SOURCE	1000lm (3000 K CRI90)
DELIVERED LUMEN OUTPUT	1000lm (3000 K CRI90, 160° Diff.)
LED NUMBER	Strip led
MATERIAL	body in painted inox steel
DRIVER	not included, see pag. 351
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	inox stake - code : PI007
NOTES	other RAL on request

PLG


Accessories
Installation




Code : **IR990**
Outer-case for:
IRIS, GRILLO,
BEE, APE




Code : **JC990**
Outer-case for:
CALLA, LILIUM, DATURA,
MINI GLICINE, GLICINE,
JUNCUS



Code : **BAS01**
Base for one unit for:
JUNCUS




Code : **BAS02**
Base for three unit for:
JUNCUS



Code : **BAS08**
Applique base for:
GRILLO, ROBIN




Code : **BAS06**
Applique base for:
STEM



Code : **BAS05**
Cover for base x
BAS03 for:
STEM



Code : **PLT03**
Inox plate for:
BLADE

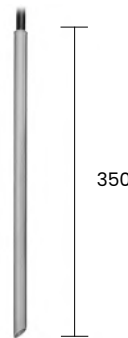


Code : **PI008**
Inox stake for:
JUNCUS




Code : **PI017**
Inox stake for:
STEM




Code : **PI007**
Inox stake for:
RADENTE

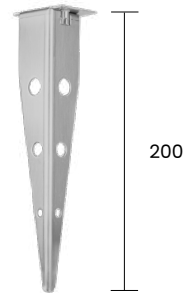


Code : **PI006**
Inox stake for:
BLADE



Code : **PI011**
Inox stake for:
GRILLO

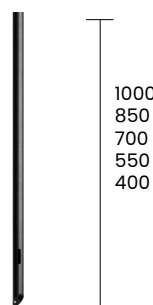

Code : **PI009**
Mobile stake for:
STEM

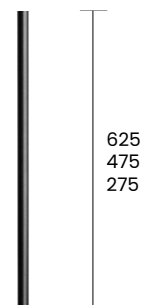

Code : **PI012**
Extension for:
STEM

Accessories
Installation



Code : **BAS03**
Base with central
cable entry for:
STEM



Code : **BAS04**
Base with side cable
entry for:
STEM




Code : **PLT04**
Fixing plate for:
STEM



Code : **BLT02**
5m x 25mm belt to fix the
device to the tree trunk,
equipped with buckle - for:
STEM

Antiglare



Hex louver
Code : **NID06** ROBIN
Code : **NID01** STEM



Anti-glare cap
Code : **CAP15** ROBIN
Code : **CAP05** STEM




Anti-glare tube cap
Code : **CAP16** ROBIN
Code : **CAP06** STEM



Bollards



Micro spillo

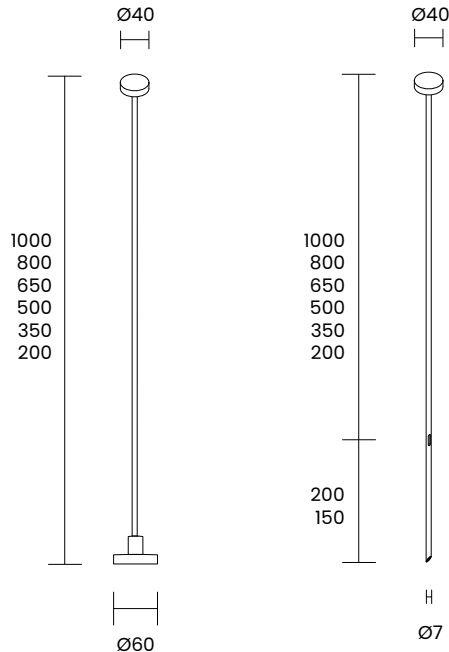


CE	III	IP65							
POWER SUPPLY		max 3W - 24V							
CODE		MCSP1 ■ ■ ■ ■ with stake							
		MCSP2 ■ ■ ■ ■ with base							
LED COLOUR		Y - Warm white 2700 K W - Warm white 3000 K							
OPTICS		 Diffused							
FINISHES		B - Black K - Corten							
STEM LENGTH		1 - 200mm 2 - 350mm 3 - 500mm 4 - 650mm 5 - 800mm 6 - 1000mm							
MATERIAL		Stem spike in painted brass, head and base in anodized and painted aluminium. Inox AISI 316L stake							
DRIVER		not included, see pag. 351							
POWER CABLE		includes 2 mt Sub4 FROST-UV 2 x 0,50 cable							
NOTES		other RAL on request, other lenghts on request							

PLG



Mini spillo

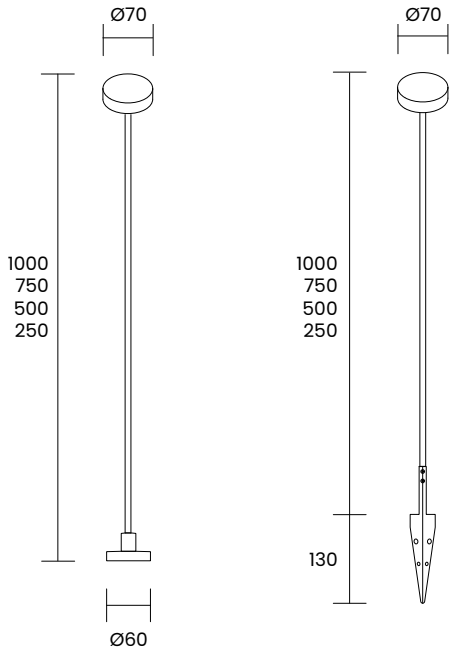


POWER SUPPLY	max 5W - 24V
CODE	MSP01  with stake MSP02  with base
LED COLOUR	Y - Warm white 2700 K W - Warm white 3000 K
OPTICS	 Diffused
FINISHES	B - Black K - Corten
STEM LENGTH	1 - 250mm 2 - 500mm 3 - 750mm 4 - 1000mm
MATERIAL	Stem in painted Inox steel, head and base in anodized and painted aluminium. Inox AISI 316L stake
DRIVER	not included, see pag. 351
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	other RAL on request, other lenghts on request

PLG



Spillo

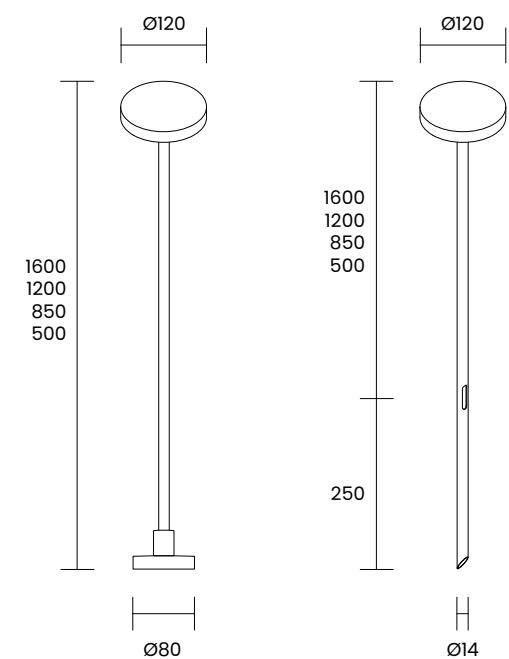


CE III IP65 A A+ A++	
POWER SUPPLY	max 14W – max 500mA
CODE	SPL01 with stake
	SPL02 with base
LED COLOUR	X – Warm white 2200 K J – Warm white 2700 K – CRI90 H – Warm white 3000 K – CRI90 N – Natural white 4000 K
OPTICS	D Diffused
FINISHES	B – Black K – Corten
STEM LENGTH	1 – 500mm 2 – 850mm 3 – 1200mm 4 – 1600mm
LUMEN OUTPUT SOURCE	1080lm (3000 K CRI90, 500mA)
LED NUMBER	7 power LEDs
MATERIAL	Stem in painted Inox steel, head and base in anodized and painted aluminium. Inox AISI 316L stake
DRIVER	not included, see pag. 348 and 350
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	other RAL on request, other lenghts on request, 24 version on request

PLG



Centrone

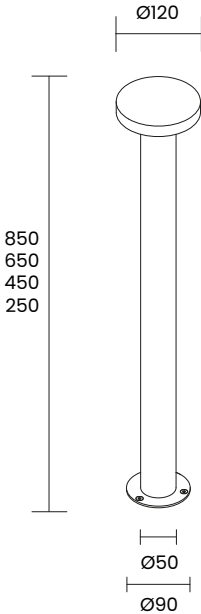


CE IP65    

POWER SUPPLY	max 14W - 220V / 240V
CODE	CNT01    
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 Diffused
FINISHES	B - Black K - Corten
STEM LENGTH	1 - 250mm 2 - 450mm 3 - 650mm 4 - 850mm
LUMEN OUTPUT SOURCE	1080lm (3000 K CRI90, 500mA)
LED NUMBER	7 power LEDs
MATERIAL	Stem in painted Inox steel, head in anodized and painted aluminium, base in painted aluminium
DRIVER	Included
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	other RAL on request, other lenghts on request

PLG




Nose

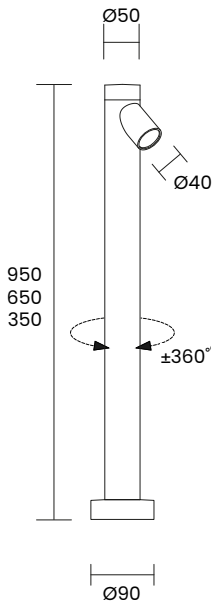

POWER SUPPLY	max 3,5W - max 350mA
	max 5W - max 500mA
	max 7W - max 700mA
CODE	NOS01 ■ ■ ■ ■
LED COLOUR	X - Warm white 2200 K
	J - Warm white 2700 K - CRI90
	H - Warm white 3000 K - CRI90
	N - Natural white 4000 K
OPTICS	M W D
	25° 45° Diff.
FINISHES	B - Black
	K - Corten
STEM LENGTH	1 - 350mm
	2 - 650mm
	3 - 950mm
LUMEN OUTPUT SOURCE	400lm (3000 K CRI90, 350mA)
	570lm (3000 K CRI90, 500mA)
	800lm (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	310lm (3000 K CRI90, 350mA, 45°)
	420lm (3000 K CRI90, 500mA, 45°)
	530lm (3000 K CRI90, 700mA, 45°)
LED NUMBER	1 power LED multichip
MATERIAL	body in aluminium
DRIVER	not included, see pag. 347, 348, 349 and 350
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	other RAL on request, 24V version on request

PLG

Nose adj

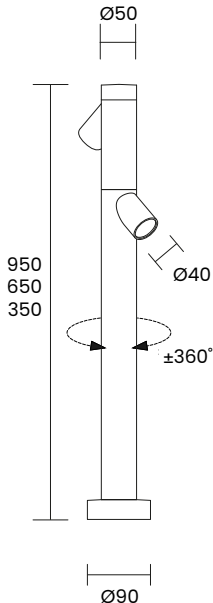



POWER SUPPLY	max 3,5W x2 - max 350mA
	max 5W x2 - max 500mA
	max 7W x2 - max 700mA
CODE	NSA01 ■ ■ ■ ■
LED COLOUR	X - Warm white 2200 K
	J - Warm white 2700 K - CRI90
	H - Warm white 3000 K - CRI90
	N - Natural white 4000 K
OPTICS	M W T
	25° 45° 90°
FINISHES	B - Black
	K - Corten
STEM LENGTH	1 - 350mm
	2 - 650mm
	3 - 950mm
LUMEN OUTPUT SOURCE	400lm x2 (3000 K CRI90, 350mA)
	570lm x2 (3000 K CRI90, 500mA)
	800lm x2 (3000 K CRI90, 700mA)
DELIVERED LUMEN OUTPUT	310lm x2 (3000 K CRI90, 350mA, 45°)
	420lm x2 (3000 K CRI90, 500mA, 45°)
	530lm x2 (3000 K CRI90, 700mA, 45°)
LED NUMBER	2 power LEDs multichip
MATERIAL	body in aluminium
DRIVER	not included, see pag. 347, 348, 349 and 350
POWER CABLE	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable
NOTES	other RAL on request, 24V version on request

PLG

333



Bordo

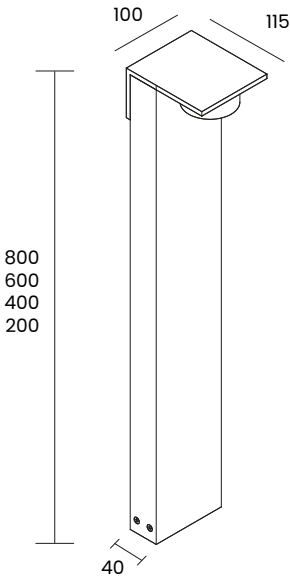

CE IP65 A A+ A++

POWER SUPPLY	max 12W - 220V / 240V
CODE	BRD01
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	Asymmetric Diffused
FINISHES	B - Black K - Corten
BODY LENGTH	1 - 200mm 2 - 400mm 3 - 600mm 4 - 800mm
LUMEN OUTPUT SOURCE	1730lm (3000 K CRI90)
DELIVERED LUMEN OUTPUT	1560lm (3000 K CRI90, 350mA, Asymmetric)
LED NUMBER	1 power LED multichip
MATERIAL	body and head in painted aluminium, base in Inox AISI 316L
DRIVER	Included
NOTES	other RAL on request

PLG

Giraffe, la nuova lampada da terra PLG nasce dalla linea slanciata, elegante e maestosa del mammifero più alto esistente. Elementi chiave che "Giraffe" riprende dal suo animale di ispirazione sono il lungo collo che permette di vedere lontano, la forza poderosa e bilanciata alla base, e le sue tipiche corna, simbolo di unicità e protezione, che allo stesso tempo conferiscono al design della lampada un tocco di carattere.

Giraffe, the new PLG floor lamps, which are born from the slender, elegant and majestic lines of the highest existing mammal. Giraffe takes from its animal of inspiration some key elements which are the long neck, that allows you to see far, its ponderous and balanced strength at the base, and its typical horns, symbol of uniqueness and protection, which at the same time give the lamp's design a touch of character.

04 – Giraffe




Section index

2 RODS



GIRAFFE
PAG 339


3 RODS

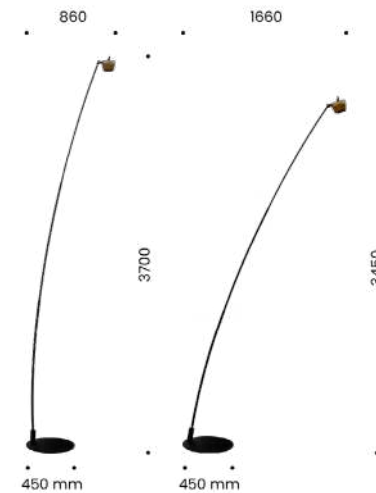

GIRAFFE C
PAG 341




GIRAFFE D
PAG 343

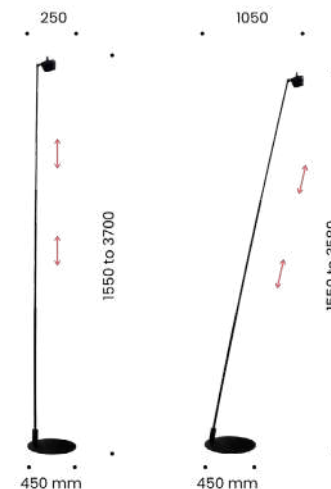

Mounting option


HEAD INCLINATION

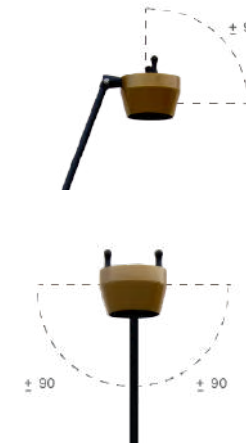

BASE INCLINATION



ADJUSTABLE ROD LENGHT



Accessories

BASE 200 mm CODE: BAS07



DIMMER CODE: DIMM1



HONEYCOMB CODE: NID04



CONNECTOR IP68 CODE: TCH01



DRIVERS

LED POWER SUPPLY
Constant current
28W 500mA
30W 700mA

Constant voliage
36W 24V





CODE: 00 AL3050
CODE: 00 AL3070
CODE: 00 AL3624



Giraffe

2 RODS

24,5 kg

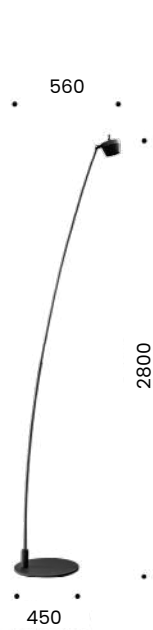

POWER SUPPLY	max 25W - max 700mA max 20W - max 500mA
CODE	GF001 2 Rods GF002 3 Rods
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	15° 30° 45°
FINISHES	A - Antracite W - White B - Black K - Corten L - Gold Moero (only the head)
LUMEN OUTPUT SOURCE	3000lm (3000 K CRI90, 700mA) 2140lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	2450lm (3000 K CRI90, 700mA , 45°) 1750lm (3000 K CRI90, 500mA , 45°)
LED NUMBER	1 Power LED multichip
MATERIAL	Base in steel, rods in inox steel, head in anodized and painted aluminium
DRIVER	not included, see pag. 342
POWER CABLE	includes 5 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	Dimmer, Base 200mm, Power supply, Connector, Honeycomb
NOTES	other RAL on request other lenghts on request

3 RODS

25,5 kg




POWER SUPPLY	max 16W - max 24V
CODE	GF2401 2 Rods GF2402 3 Rods
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	15° 30° 45°
FINISHES	A - Antracite W - White B - Black K - Corten L - Gold Moero (only the head)
LUMEN OUTPUT SOURCE	1926lm (3000 K CRI90, 900mA)
DELIVERED LUMEN OUTPUT	1575lm (3000 K CRI90, 900mA , 45°)
LED NUMBER	1 Power LED multichip
MATERIAL	Base in steel, rods in inox steel, headin anodize and painted aluminium
DRIVER	not included, see pag. 342
POWER CABLE	includes 5 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	Dimmer, Base 200mm, Power supply, Connector, Honeycomb
NOTES	other RAL on request other lenghts on request





Giraffe C


2 RODS  24,5 kg

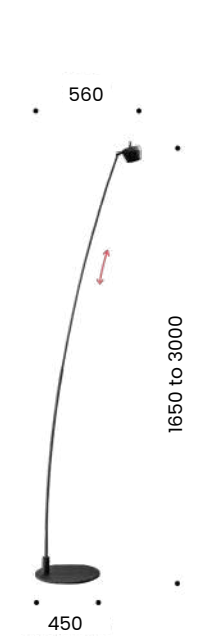

3 RODS  25,5 kg

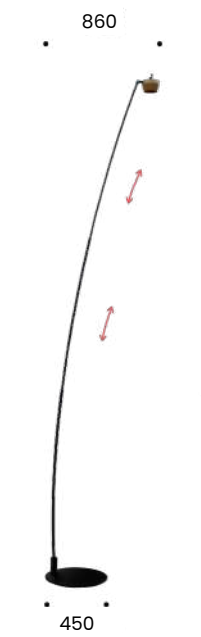

POWER SUPPLY	max 25W - max 700mA max 20W - max 500mA
CODE	GFC01  2 Rods GFC02  3 Rods
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 15° 30° 45°
FINISHES	B - Black L - Gold Moero (only the head)
LUMEN OUTPUT SOURCE	3000lm (3000 K CRI90, 700mA) 2140lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	2450lm (3000 K CRI90, 700mA , 45°) 1750lm (3000 K CRI90, 500mA , 45°)
LED NUMBER	1 Power LED multichip
MATERIAL	Base in steel, rods in inox steel, head in anodized and painted aluminium
DRIVER	not included, see pag. 342
POWER CABLE	includes 5 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	Dimmer, Base 200mm, Power supply, Connector, Honeycomb
NOTES	other RAL on request other lenghts on request






POWER SUPPLY	max 16W - max 24V
CODE	GFC241  2 Rods GFC242  3 Rods
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 15° 30° 45°
FINISHES	B - Black L - Gold Moero (only the head)
LUMEN OUTPUT SOURCE	1926lm (3000 K CRI90, 900mA)
DELIVERED LUMEN OUTPUT	1575lm (3000 K CRI90, 900mA , 45°)
LED NUMBER	1 Power LED multichip
MATERIAL	Base in steel, rods in inox steel, headin anodize and painted aluminium
DRIVER	not included, see pag. 342
POWER CABLE	includes 5 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	Dimmer, Base 200mm, Power supply, Connector, Honeycomb
NOTES	other RAL on request other lenghts on request




Giraffe D

3 RODS  25,5 kg



POWER SUPPLY	max 25W - max 700mA max 20W - max 500mA
CODE	GFD01  3 Rods
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 15° 30° 45°
FINISHES	B - Black L - Gold Moero (only the head)
LUMEN OUTPUT SOURCE	3000lm (3000 K CRI90, 700mA) 2140lm (3000 K CRI90, 500mA)
DELIVERED LUMEN OUTPUT	2450lm (3000 K CRI90, 700mA , 45°) 1750lm (3000 K CRI90, 500mA , 45°)
LED NUMBER	1 Power LED multichip
MATERIAL	Base in steel, rods in inox steel, head in anodized and painted aluminium
DRIVER	not included, see pag. 342
POWER CABLE	includes 5 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	Dimmer, Base 200mm, Power supply, Connector, Honeycomb
NOTES	other RAL on request other lenghts on request



POWER SUPPLY	max 16W - max 24V
CODE	GFD241  3 Rods
LED COLOUR	X - Warm white 2200 K J - Warm white 2700 K - CRI90 H - Warm white 3000 K - CRI90 N - Natural white 4000 K
OPTICS	 15° 30° 45°
FINISHES	B - Black L - Gold Moero (only the head)
LUMEN OUTPUT SOURCE	1926lm (3000 K CRI90, 900mA)
DELIVERED LUMEN OUTPUT	1575lm (3000 K CRI90, 900mA , 45°)
LED NUMBER	1 Power LED multichip
MATERIAL	Base in steel, rods in inox steel, headin anodize and painted aluminium
DRIVER	not included, see pag. 342
POWER CABLE	includes 5 mt Sub4 FROST-UV 2 x 0,50 cable
ACCESSORIES	Dimmer, Base 200mm, Power supply, Connector, Honeycomb
NOTES	other RAL on request other lenghts on request

Ogni apparecchio PLG richiede l'abbinamento del giusto alimentatore che deve essere scelto in base al numero massimo di LED collegabili.


In ogni scheda tecnica dei dispositivi PLG è segnata la potenza espressa in Watt e la relativa corrente di alimentazione (es.1W/350mA).

Alcuni prodotti sono disponibili con alimentazione a 24V.


Every PLG unit needs the correct driver which has to be selected according to the maximum number of leds that can be connected. In each PLG datasheet you will find the unit's power in watt and the current to be used (e.g. 1W/350mA).

Some products are available in 24V.

05 - Controllers

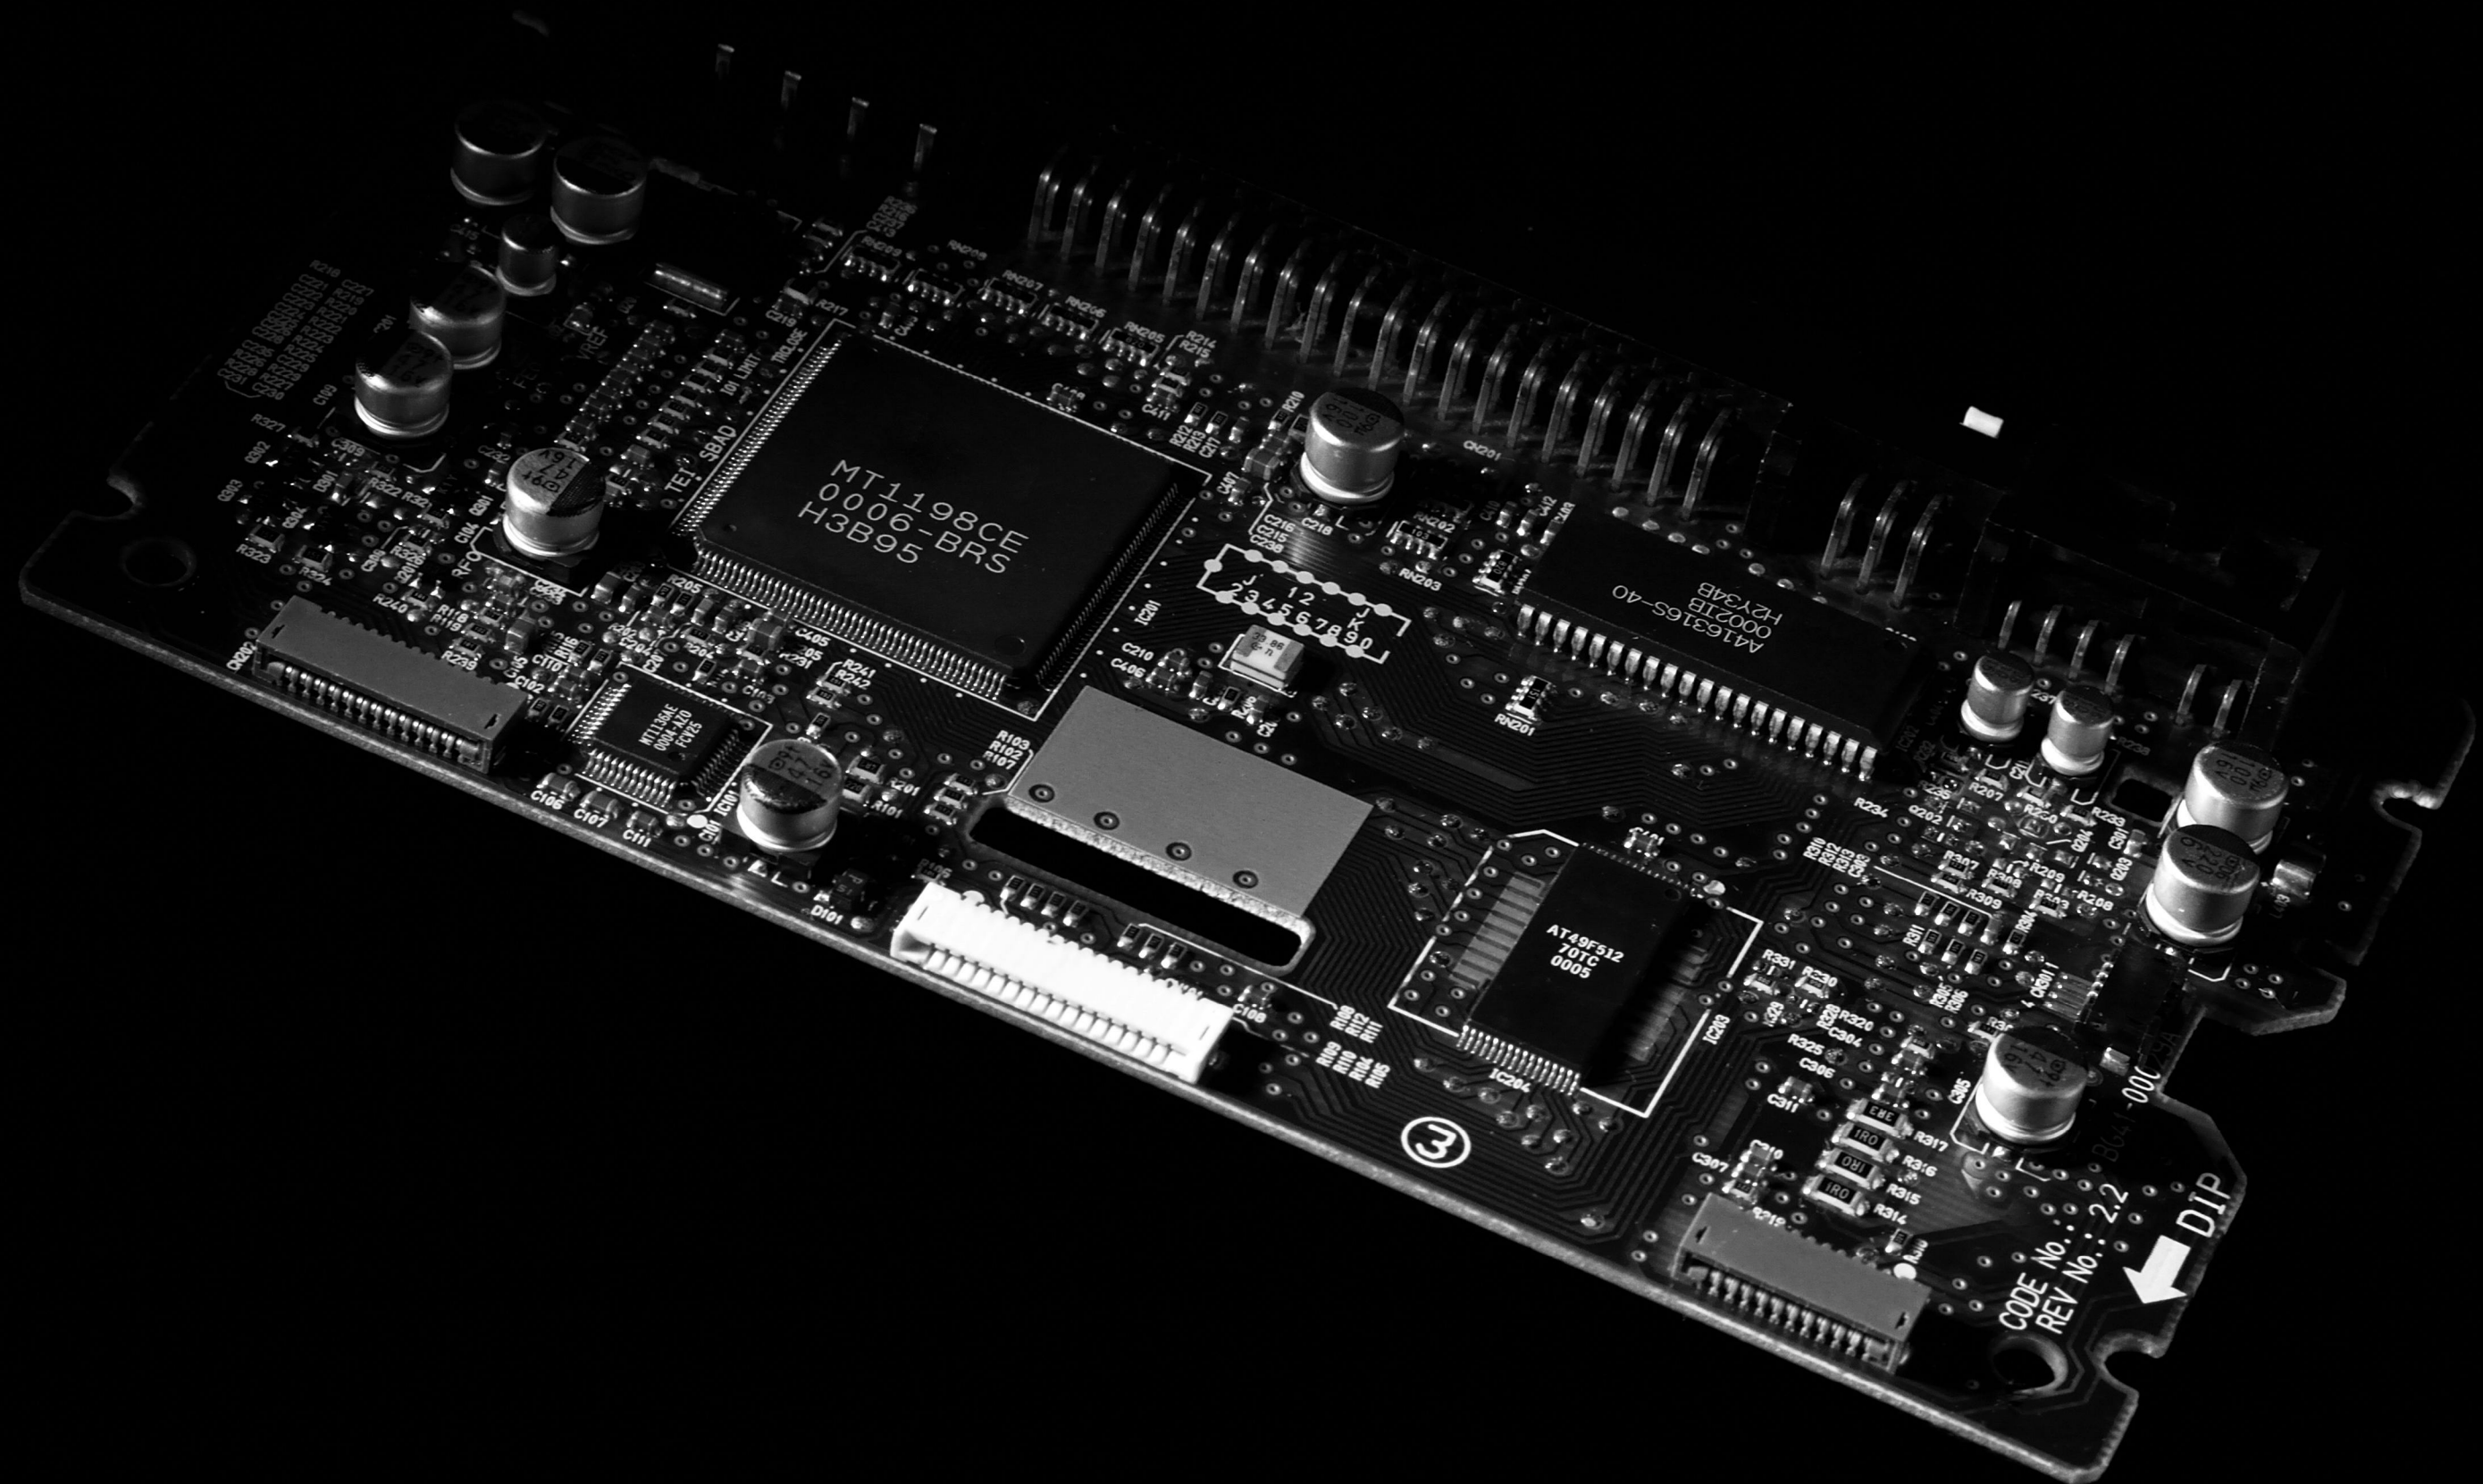


Drivers 250mA

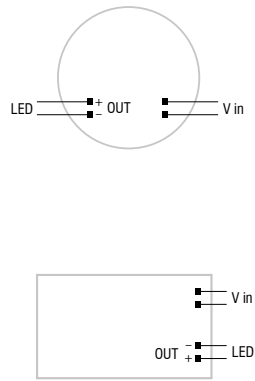

CODE	ALT03
VOLTAGE	220÷240V
POWER	10W
V OUT	24÷40V
SIZE	Ø47 x 42 x 20
IP RATE	IP20

CODE	ALI025
VOLTAGE	220÷240V
POWER	10W
V OUT	3÷40V
SIZE	75,5 x 39 x 22,3
IP RATE	IP20

Drivers 350mA

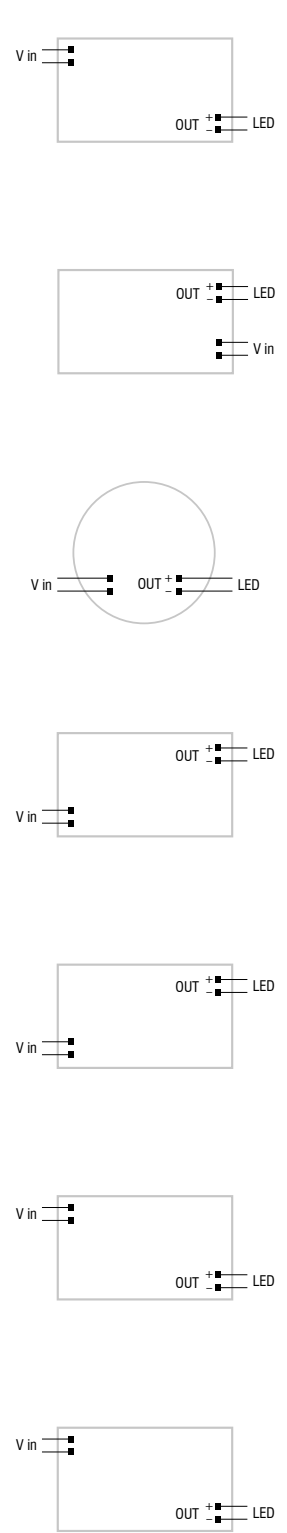

CODE	ALI17
VOLTAGE	100÷240V
POWER	8W
V OUT	2÷23V
SIZE	57 x 31 x 21
IP RATE	IP20

CODE	ALI27
VOLTAGE	110÷240V
POWER	12W
V OUT	2÷31V
SIZE	50 x 62 x 22
IP RATE	IP20

CODE	ALT03
VOLTAGE	100÷240V
POWER	14W
V OUT	24÷40V
SIZE	Ø47 x 42 x 20
IP RATE	IP42


CODE	ALI12
VOLTAGE	100÷240V
POWER	16W
V OUT	12÷48V
SIZE	77 x 40 x 29
IP RATE	IP42

CODE	AL3591
VOLTAGE	100÷240V
POWER	35W
V OUT	28÷100V
SIZE	84 x 57 x 29,5
IP RATE	IP42


CODE	ALSN1
VOLTAGE	200÷240V
POWER	4W
V OUT	3÷12V
SIZE	38 x 30 x 23,5
IP RATE	IP66

CODE	ALI314
VOLTAGE	200÷240V
POWER	18W
V OUT	6÷48V
SIZE	140 x 30 x 25
IP RATE	IP67


Drivers 500mA




CODE	AL118
VOLTAGE	100÷240V
POWER	6W
V OUT	2÷11V
SIZE	57 x 31 x 21
IP RATE	IP20




CODE	AL1051
VOLTAGE	220÷240V
POWER	10W
V OUT	3÷20V
SIZE	75,5 x 39 x 22,3
IP RATE	IP20




CODE	AL124
VOLTAGE	110÷240V
POWER	12W
V OUT	2÷31V
SIZE	50 x 62 x 22
IP RATE	IP20




CODE	ALT02
VOLTAGE	220÷240V
POWER	24W
V OUT	24÷40V
SIZE	Ø56,5 x 25
IP RATE	IP20



CODE	AL3050
VOLTAGE	220÷240V
POWER	28W
V OUT	28÷56V
SIZE	125 x 38 x 23
IP RATE	IP20




CODE	ALSN2
VOLTAGE	200÷240V
POWER	4W
V OUT	3÷9,5V
SIZE	38 x 30 x 23,5
IP RATE	IP66




CODE	AL125
VOLTAGE	200÷240V
POWER	20W
V OUT	9÷35V
SIZE	118 x 35 x 28
IP RATE	IP67

PLG

Drivers 700mA




CODE	AL1070
VOLTAGE	220÷240V
POWER	10W
V OUT	3÷14V
SIZE	75,5 x 39 x 22,3
IP RATE	IP20



CODE	ALT04
VOLTAGE	220÷240V
POWER	28W
V OUT	24÷40V
SIZE	Ø65 x 25
IP RATE	IP20




CODE	AL3312
VOLTAGE	100÷240V
POWER	35W
V OUT	15÷50V
SIZE	84 x 57 x 29,5
IP RATE	IP42



CODE	ALSN3
VOLTAGE	200÷240V
POWER	4W
V OUT	3÷6V
SIZE	38 x 30 x 23,5
IP RATE	IP66


Drivers 1200mA




CODE	AL1200
VOLTAGE	220÷240V
POWER	6W
V OUT	2,5÷5V
SIZE	57 x 31 x 21
IP RATE	IP20

PLG

Multicurrent Drivers




CODE	AL041
VOLTAGE	220÷240V
POWER	42W max
V OUT	Variable
SIZE	132 x 43 x 22
IP RATE	IP20





CODE	AL315
VOLTAGE	220÷240V
POWER	50W max
V OUT	Variable
SIZE	124 x 79 x 22
IP RATE	IP20


Dimmable Drivers



CODE	AL021
VOLTAGE	220÷240V
POWER	20W
V OUT	Variable
SIZE	94 x 67 x 21
IP RATE	IP20
DIMMABLE	1-10V & PUSH



CODE	DAL12
VOLTAGE	220÷240V
POWER	42W max
V OUT	Variable
SIZE	132 x 43 x 22
IP RATE	IP20
DALI	IP20



Drivers 24V



CODE	AL018
VOLTAGE	100÷240V
POWER	18W
V OUT	24V
SIZE	140 x 30 x 22
IP RATE	IP67



CODE	AL035
VOLTAGE	100÷240V
POWER	35W
V OUT	24V
SIZE	148 x 40 x 30
IP RATE	IP67



CODE	AL060
VOLTAGE	100÷240V
POWER	60W
V OUT	24V
SIZE	162,5 x 42,5 x 32
IP RATE	IP67

NOTES

[illegible]

NOTES

[illegible]



Ex Strada Statale 96
70020 Toritto (BA)
mail: info@plgenius.com
phone: 080 603244
www.plgenius.com